

No.305

THE MAGAZINE FOR HOBBY ENGINEERS, MAKERS AND MODELLERS

MODEL ENGINEERS' WORKSHOP

Join the conversation at: www.model-engineer.co.uk

JULY 2021

INSIDE

- Tapping Guide for a Drill Press
 - Adaptors for the Diamond Tool Holder
 - Making Joe Noci's Electronic Lead Screw
 - EMCO Screwcutting Clutch
 - Theasby's Wrinkles
 - Data Tables
- And much more!**



Bluetooth DRO for a Myford



Vertical Slide for Small Lathes

COVER STORY

Introducing Milling Machines

GET MORE OUT OF YOUR WORKSHOP WITH MEW



PRO MACHINE TOOLS LIMITED

Tel: 01780 740956
Int: +44 1780 740956

Up to **5 year warranty** on selected WABECO Machines!



Precision machines made in Germany for the discerning engineer!



Wabeco CNC Lathe CC-D6000

- Centre Distance - 600mm
- Centre Height - 135mm
- Speed - 30 to 2300rpm
- Power - 1.4 KW
- Size - 1215 x 500 x 605mm
- Weight - 150Kg
- NCCAD/ NCCAD Pro

Wabeco produce quality rather than eastern quantity

CNC machines are offered with a variety of CNC control and software systems, and still be used as manual machines.

Wabeco produce precision made machines by rigorous quality control and accuracy testing.



All lathes and mills are backed by an extensive range of tools and accessories



Wabeco Mill F1210

- Table - 700 x 180mm
- Z axis - 280 mm
- Speed - 140 to 3000rpm
- Power - 1.4 KW
- Size - 900 x 610 x 960mm
- Weight - 101Kg

Wabeco Lathe D6000

- Centre Distance - 600 mm
- Centre Height - 135mm
- Speed - 30 to 2300rpm
- Power - 1.4 KW
- Size - 1230 x 500 x 470mm
- Weight - 150kg

Wabeco Lathe D4000

- Centre Distance - 350mm
- Centre Height - 100mm
- Speed - 30 to 2300rpm
- Power - 1.4 KW
- Size - 860 x 400 x 380mm
- Weight - 71kg

5 year warranty



Wabeco CNC Mill CC-F1410

- Table - 700 x 180mm
- Z axis - 280 mm
- Speed - 140 to 3000rpm
- Power - 1.4 KW



5 year warranty

EMCO

1885 WABECO 1885

CERIANI

**SWISS
tec**

TECO

**GO!matic
Maschinenbau**

PROXXON

**EMCO
Hobymaschinen**



- Size - 950 x 600 x 950mm
- Weight - 122Kg
- NCCAD/NCCAD Pro

2 year warranty

MORE MACHINES AND ACCESSORIES ON LINE

Our machines suit the discerning hobbyist as well as blue chip industry

We regularly ship worldwide

Please contact us for stock levels and more technical detail

All of our prices can be found on our web site:

www.emcomachinetools.co.uk

PRO Machine Tools Ltd.

17 Station Road Business Park, Barnack,
Stamford, Lincolnshire PE9 3DW

tel: 01780 740956 • int: +44 1780 740956
email: sales@emcomachinetools.co.uk

MODEL ENGINEERS' WORKSHOP

Published by MyTimeMedia Ltd.
Suite 25, Eden House, Enterprise Way,
Edenbridge, Kent TN8 6HF
+44 (0) 203 855 6105
www.model-engineer.co.uk

SUBSCRIPTIONS

UK - New, Renewals & Enquiries
Tel: 0344 243 9023

Email: help@me.secureorder.co.uk

USA & CANADA - New, Renewals & Enquiries
Tel: (001)-866-647-9191

REST OF WORLD - New, Renewals & Enquiries
Tel: +44 1604 828 748

Email: help@me.secureorder.co.uk

CURRENT AND BACK ISSUES

Tel: 01795 662976

Website: www.mags-uk.com

MODEL ENGINEERING PLANS

Contact: www.myhobbystore.co.uk/contact

Website: www.myhobbystore.co.uk/me-plans

EDITORIAL

Editor: Neil Wyatt

Tel: +44 (0)1689 869 912

Email: neil.wyatt@mytimemedia.com

PRODUCTION

Designer: Andrew Tompkins

Illustrator: Grahame Chambers

Retouching: Andrew Tompkins

Ad Production: Andrew Tompkins

ADVERTISING

Business Development Manager: Angela Price

Email: angela.price@mytimemedia.com

MARKETING & SUBSCRIPTIONS

Subscriptions Executive: Beth Ashby-Njiiri

Email: beth.ashby@mytimemedia.com

MANAGEMENT

Group Advertising Manager: Rhona Bolger

Email: rhona.bolger@mytimemedia.com

Tel: 0204 522 8221

Chief Executive: Owen Davies

mytime media
print & digital media publishers

© MyTimeMedia Ltd. 2021
All rights reserved ISSN 0959-6909

The Publisher's written consent must be obtained before any part of this publication may be reproduced in any form whatsoever, including photocopies, and information retrieval systems. All reasonable care is taken in the preparation of the magazine contents, but the publishers cannot be held legally responsible for errors in the contents of this magazine or for any loss however arising from such errors, including loss resulting from negligence of our staff. Reliance placed upon the contents of this magazine is at reader's own risk.

Model Engineers' Workshop, ISSN 0959-6909, is published monthly with an additional issue in August by MYTIMEMEDIA Ltd, Enterprise House, Enterprise Way, Edenbridge, Kent TN8 6HF, UK. The US annual subscription price is 52.95GBP (equivalent to approximately 88USD). Airfreight and mailing in the USA by agent named WN Shipping USA, 156-15, 146th Avenue, 2nd Floor, Jamaica, NY 11434, USA.

Periodicals postage paid at Brooklyn, NY 11256.

US Postmaster: Send address changes to Model Engineers' Workshop, WN Shipping USA, 156-15, 146th Avenue, 2nd Floor, Jamaica, NY 11434, USA. Subscription records are maintained at DSB.net Ltd, 3 Queensbridge, The Lakes, Northampton, NN4 5DT. Air Business Ltd is acting as our mailing agent.



When you have finished with
this magazine please recycle it.

Paper supplied from wood grown in
forests managed in a sustainable way.



On the Editor's Bench

No Progress at Home

For a variety of reasons, I still have not been able to make any progress with my new workshop, aside from some minor work to temporarily fix some leaks in the roof and to repair the door. I'd like to thank the readers who have sent me a variety of advice and ideas. One problem I have is that the very long (16 foot) roof beams were fabricated from two pieces and have sagged, I have various schemes for jacking them up and reinforcing or replacing them. One thought is a 'false' wall dividing the space in two to break them into a double span. I cannot wait to get past the planning stage and put some of these ideas into action.

Shows are Returning!

I am hoping that, by the time you read this the medical evidence will have supported a further relaxation in the measures to control the Covid 19 pandemic. As of today, the tension between returning to a more normal way of life and the need to keep 'new variants' under control fills the front pages. I have no idea which way things will go in the short term, but the longer-term outlook is good even if there are a few more delays.

Since the last issue I received my second dose of the Oxford/AstraZeneca vaccine, with just the mild side effect of feeling a bit tired for a day or two. As more and more people are vaccinated, it does seem that we are, hopefully, getting past the worst and one sign of this is that this issue announces the planned return of the Midlands Model Engineering Exhibition in October, as well as the International Model Boat Show in November. I am sure that these, and any other modelling related events will be very busy if they go ahead.

Hopefully, there will continue to be more good news about more events across the UK in the coming months. I look forward to going along and meeting readers, suppliers and from across the hobby- both old friends and new faces.

CLOCK CONSTRUCTION & REPAIR

Books by:


John Wilding MBE
FBHI, E. J. Tyler,
John G. Wright, Eric
Woof, John Tyler
and others.

SPRINGS
BEARINGS
FRAMES
DIALS etc.

**FREE
Catalogue**

Telephone: +44 (0) 1420 487747

www.ritetimepublishing.com

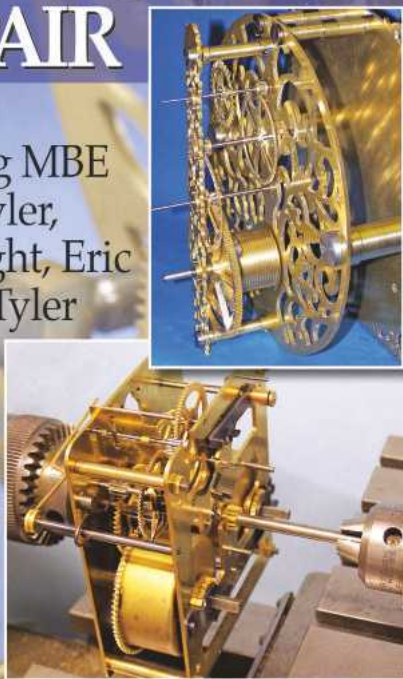

POLLY MODEL ENGINEERING LIMITED



**Expanding range of In-house manufactured
components**

NEW! Axle pumps

Available in 1/4", 3/8" &
1/2" ram. Prices start
from £45.00



NEW!



Brake Valve

For steam or vacuum

£83.00

NEW! Blowdown
spanner – suitable for
5/16" & 3/8"

£6.50



BR/LMS safety valves



Safety valves



Box Spanners

BA & Metric. Available
individually or in sets

Only £3 each



Tender water valves



GWR injector steam valve



GWR dummy whistles

Catalogue available £2.50 UK posted £8 International and enquire for further details or visit our website where you will find
Polly Locos Kits, drawings and castings for scale models and comprehensive ME Supplies.



Polly Model Engineering Limited
Atlas Mills, Birchwood Avenue,
Long Eaton, Nottingham, NG10 3ND

www.pollymodelengineering.co.uk
Tel: 0115 9736700
email: sales@pollymodelengineering.co.uk

Tracy Tools Ltd.
Unit 1, Parkfield Units,
Barton Hill Way,
Torquay TQ2 8JG

 **Tracy Tools Ltd**

Visit our brand new website

We ship anywhere in the world

www.tracytools.com

PRODUCTS

- Taps and Dies
- Centre Drills
- Clearance Bargains
- Diestocks
- Drill sets (HSS)
boxed
- Drills
- Drill set (loose) HS
- Endmills
- Lathe Tooling
- Reamers
- Slot Drills
- Specials
- Tailstock Die Holder
- Tap Wrenches
- Thread Chasers

Acme
Taps



Taper Shank Drill
HSS



Reamer



Taps
&
Dies



Tracy Tools Ltd

Tap & Die Specialist, Engineer Tool Supplies

Tel: 01803 328 603
Fax: 01803 328 157
Email: info@tracytools.com
www.tracytools.com

NEW STORE
NORTHAMPTON
OPENS IN AUGUST!

Clarke

METAL LATHE

- 300mm between centres • LH/RH thread screw cutting • Electronic variable speed
- Gear change set • Self centering 3 jaw chuck & guard • Power feed



£598.00
£717.60 INC. VAT

CL300M

Machine Mart

65 SUPERSTORES NATIONWIDE

Britain's Tools & Machinery Specialist!



FREE 500 PAGE CATALOGUE

GET YOUR FREE COPY! IN-STORE

PHONE
0844 880 1265

ONLINE
www.machinemart.co.uk



Clarke MILLING DRILLING MACHINE

- Bench mountable, tilts 45° left & right from vertical
- Table travel 100x235mm
- Table Effective Size LxW: 92 x 400mm



£419.00
£502.00 INC. VAT

Clarke MICRO MILLING & DRILLING MACHINE

- Bench mountable • MT2 Spindle
- Taper • Face mill capacity 20mm, end mill 10mm
- Table cross travel 90mm, longitudinal travel 180mm

MODEL	MOTOR	SPINDLE SPEED	EXC. VAT	INC. VAT
CMD10	150W/230V	100-2000rpm	£419.00	£502.00
CMD300	470W/230V	0-2500rpm	£629.00	£754.80

TURBO AIR COMPRESSORS

- Superb range ideal for DIY, hobby & semi-professional use



MODEL	MOTOR	CFM	TANK	EXC. VAT	INC. VAT
8/260	2HP	7.5	24ltr	£99.98	£119.98
11/260	2.5HP	9.5	24ltr	£119.98	£143.98
8/550	2HP	7.5	50ltr	£129.98	£155.98
11/550	2.5HP	9.5	50ltr	£149.98	£179.98

Clarke BOLTLESS SHELVING/BENCHES

- Simple fast assembly in minutes using only a hammer



MODEL	DIMS	EXC. VAT	INC. VAT
150	1500x800x300	£33.98	£40.98
350	1500x800x1500	£33.98	£40.98
350	1500x800x1800	£52.99	£63.98

Clarke STATIC PHASE CONVERTERS

- Run big 3 phase woodworking machines from 1 phase supply
- Variable output power to match HP of motor to be run



MODEL	MOTOR HP	FUSE	EXC. VAT	INC. VAT
PC20	2HP	10Amps	£249.00	£288.80
PC40	3.5HP	20Amps	£289.00	£346.80
PC60	5.5HP	32Amps	£339.00	£406.80

Clarke ENGINEERS BENCH VICES

- A range of fixed and swivel vices with top quality cast iron construction



MODEL	JAW WIDTH	BASE	EXC. VAT	INC. VAT
CV75B	75mm	Fixed	£19.98	£23.98
CV100B	100mm	Fixed	£20.98	£25.19
CV125B	125mm	Fixed	£26.98	£32.39
CV125S	125mm	Swivel	£31.98	£38.39
CV150B	150mm	Fixed	£38.98	£46.79
CV150S	150mm	Swivel	£49.98	£59.98
CV150B	150mm	Swivel	£54.98	£65.98
CMV140	140mm	Swivel	£79.98	£95.98

Clarke WORKBENCH WITH PEGBOARD

- Easy to assemble, providing valuable working space and plenty of additional storage capacity.



MODEL	EXC. VAT	INC. VAT
CWB-R1B	£69.00	£82.00

Clarke 1 TONNE FOLDING WORKSHOP CRANE

- Dimensions (LxWxH) - 1150 x 560 x 1440 mm • Pegboard back wall with 30 hooks supplied



MODEL	EXC. VAT	INC. VAT
CFC100	£179.98	£215.98

Clarke MMA & ARC/TIG INVERTER WELDERS

- Quality machines from Britain's leading supplier
- See online for included accessories



MODEL	MIN/MAX OUTPUT CURRENT	DIA. (MM)	EXC. VAT	INC. VAT
MMA80	20A-80A	1.6-2.5	£79.98	£95.98
MMA140	10A-140A	1.6-3.2	£99.00	£118.80
AT133	10A-130A	2.5/3.2	£129.98	£155.98
AT162	10A-160A	2.5/3.2/4.0	£149.98	£179.98
MMA200	20A-200A	1.6-4	£139.00	£166.80
AT135	10A-130A	2.5/3.2	£169.98	£203.98
AT165	10A-160A	2.5/3.2/4.0	£209.00	£250.80

Clarke DRILL PRESSES

- Range of precision bench & floor presses for enthusiasts, engineering & industrial applications



MODEL	MOTOR (W)	SPEEDS	EXC. VAT	INC. VAT
CDP5E	350/7.5	5	£69.98	£83.98
CDP102B	350/7.5	5	£94.99	£101.99
CDP202B	450/16	16	£199.00	£238.80
CDP352F	550/16	16	£239.00	£288.80
CDP452B	550/16	16	£249.00	£298.80

Clarke 3-IN-1 SHEET METAL MACHINES

- Bend, Roll & Shear metal up to 1mm thick • Min. Rolling Diameter 39mm • Bending angle 0-90°



MODEL	BED WIDTH	EXC. VAT	INC. VAT
SBR305	305mm (12")	£239.00	£286.80
SBR610	610mm (24")	£449.00	£538.80
SBR760	760mm (30")	£529.00	£634.80

Clarke ANGLE GRINDERS

- Ideal for lifting & moving models
- Foot pedal operated



MODEL	DISC (MM)	MOTOR	EXC. VAT	INC. VAT
CAG900B	115	800W	£24.99	£29.98
CON1150	115	1150W	£27.99	£33.98
CAG2350C	230	2350W	£52.99	£63.98

Clarke HYDRAULIC LIFTING TABLES

- Ideal for lifting & moving models
- Foot pedal operated



MODEL	MAX. LOAD	TABLE HEIGHT	EXC. VAT	INC. VAT
HTL300	300kg	340-900mm	£319.00	£382.80
HTL500	500kg	340-900mm	£349.00	£418.80

Clarke MIG WELDERS

- Professional type torch with on/off control • Thermal overload protection • Turbo fan cooled
- Easy conversion to gas with optional accessories



MODEL	MIN-MAX AMPS	EXC. VAT	INC. VAT
PRO90	24-90	£209.98	£251.98
110E	30-100	£239.98	£287.98
135TE Turbo	30-130	£259.98	£311.98
151TE Turbo	30-150	£295.00	£354.00
175TECM Turbo	30-170	£469.00	£562.80
205TE Turbo	30-185	£499.00	£598.80

Clarke HIGH VELOCITY FANS


- Giant sizes up to 30"



MODEL	SIZE	EXC. VAT	INC. VAT
CBF20	20"	£36.98	£44.39
CFB180	18"	£39.98	£47.98
CFB180C	18"	£39.98	£47.98
CFB180L	18"	£49.98	£59.98
CAMAX24	24"	£169.00	£202.80
CAMAX30	30"	£219.00	£262.80

Clarke INDUSTRIAL ELECTRIC MOTORS

- Range of single phase motors suited to many applications
- All totally enclosed & fan ventilated for reliable long-term service



HP	SHAFT SPEED	EXC. VAT	INC. VAT
1/3	4 pole	£59.98	£71.98
1/2	2 pole	£69.98	£83.98
3/4	4 pole	£79.98	£95.98
1	2 pole	£79.98	£95.98
2	2 pole	£94.99	£113.99
3	2 pole	£119.98	£143.98
4	2 pole	£149.98	£179.98

Clarke ROTARY TOOL KIT


- Kit includes: • Rotary tool • Height adjustable stand with clamp • 1m flexible drive • 40x accessories/consumables



MODEL	VOLTS	BATTERIES	EXC. VAT	INC. VAT
CON180LI	18V	2x 2.0Ah Li-Ion	£99.98	£119.98
CON180LI	18V	2x 4.0Ah Li-Ion	£129.00	£154.80

Clarke BENCH BUFFERS/POLISHERS

- For a brilliant shine



MODEL	DIA. (mm)	EXC. VAT	INC. VAT
CB200	200	£84.99	£101.99
CB250	250	£169.00	£202.80

Clarke NO GAS/GAS MIG WELDERS

- Professional type torch with on/off control • Thermal overload protection • Turbo fan cooled
- Easy conversion to gas with optional accessories



MODEL	MIN/MAX AMPS	EXC. VAT	INC. VAT
MIG102NG	35-90	£124.98	£149.98
MIG106	40/100	£159.00	£180.80
MIG145	35/135	£189.98	£227.98
MIG196	40/180	£229.00	£274.80
MIG240	50/240	£399.00	£478.80

Clarke ARC ACTIVATED HEADSHIELDS

- Activates instantly when Arc is struck • Protects to EN379 • Suitable for arc, MIG, TIG & gas welding



Clarke AIR CONDITIONERS & DEHUMIDIFIERS

- 3-in-1 ✓ Air Con ✓ Dehumidifier ✓ 2 Speed Fan
- INC. REMOTE CONTROL, FLEXIBLE OUTLET HOSE & WINDOW SLIDER VENT



MODEL	MOTOR	EXTRACTION RATE (LTR/DAY)	EXC. VAT	INC. VAT
AC7050	705W	16.8	£219.00	£262.80
AC10050	1100W	21.6	£249.00	£298.80
AC13050	1370W	28.8	£299.00	£357.80

Clarke 18V BRUSHLESS COMBI DRILLS

- 2 forward and reverse gears



MODEL	VOLTS	BATTERIES	EXC. VAT	INC. VAT
CON180LI	18V	2x 2.0Ah Li-Ion	£99.98	£119.98
CON180LI	18V	2x 4.0Ah Li-Ion	£129.00	£154.80

PAY Monthly

- Spread the cost over 18, 24, 36 or 48 months
- Any mix of products over £300
- 18.9% APR, 10% Deposit*

5 EASY WAYS TO BUY... SUPERSTORES NATIONWIDE

ONLINE
www.machinemart.co.uk

TELESALES
0115 956 5555

CLICK & COLLECT
OVER 10,500 LOCATIONS

CALL & COLLECT
AT STORES TODAY

VISIT YOUR LOCAL SUPERSTORE

OPEN MON-FRI 8.30-6.00, SAT 8.30-5.30, SUN 10.00-4.00

BARNESLEY Pontefract Rd, Barnsley, S71 1EZ
B'HAM GREAT BARR 4 Birmingham Rd.
B'HAM HAY MILLS 1152 Coventry Rd, Hay Mills
BOLTON 1 Thynne St, BL3 6BD
BRADFORD 105-107 Manningham Lane, BD1 3BN
BRIGHTON 123 Lewes Rd, BN2 3QB
BRISTOL 1-3 Church Rd, Lawrence Hill, BS5 9JJ
BURTON UPON TRENT 12a Lichfield St, DE14 3QD
CAMBRIDGE 181-183 Histon Road, Cambridge, CB4 3HL
CARDIFF 44-46 City Rd, CF24 3DN
CARLISLE 85 London Rd, CA1 2LG
CHELTENHAM 64 Fairway Road, GL52 2EH
CHESTER 43-45 St. James Street, CH1 3EY
COLCHESTER 4 North Station Rd, CO1 1RE
CONVENTRY Bishop St, CV1 1HT
CROYDON 423-427 Brighton Rd, Sth Croydon
DARLINGTON 214 Northgate, DL1 1RB
DEAL (KENT) 182-186 High St, CT14 6BQ
DERBY Derwent St, DE1 2ED
DONCASTER Wheatley Hall Road
DUNDEE 24-26 Trades Lane, DD1 3ET
EDINBURGH 163-171 Pierfield Terrace

EXETER 16 Trusham Rd, EX2 8QG
GATESHEAD 50 Lobbey Hill Rd, NE8 4YJ
GLASGOW 280 Gt Western Rd, G4 9EJ
GLoucester 221A Barton St, GL1 4HY
GRIMSBY ELLIS Way, DN32 9BD
HULL 8-10 Holderness Rd, HU9 1EG
ILFRD 746-748 Eastern Ave, IG2 7HU
IPSWICH Unit 1 Ipswich Trade Centre, Commercial Road
LEEDS 227-229 Kirkstall Rd, LS4 2AS
LEICESTER 69 Merton Rd, LE4 6PN
LINCOLN Unit 5, The Pelham Centre, LN5 8HG
LIVERPOOL 80-88 London Rd, L3 5NF
LONDON CATFORD 289/291 Southend Lane SE6 3RS
LONDON KENDAL Parade, Edmonton N18
LONDON 503-507 Lea Bridge Rd, Leyton, E10
LUTON Unit 1, 326 Dunstable Rd, Luton LA4 8JS
MAIDSTONE 57 Upper Stone St, ME15 6HE
MANCHESTER ALTRICHAM 71 Manchester Rd, Altrincham
MANCHESTER CENTRAL 209 Bury New Road M8 8DU
MANCHESTER OPENSHAW Unit 5, Tower Mill, Ashton Old Rd, M16 2J3
MANSFIELD 169 Chesterfield Rd, South
MIDDLESBROUGH Mandale Terrace, Thornaby

01392 256 744
0191 493 2520
0141 332 9231
01452 417 948
01472 354435
01482 223161
0208 518 4286
01473 221253
0113 231 4004
0116 261 0688
01522 543 036
0151 709 4484
0208 695 5684
020 8803 0861
020 8558 8284
01582 728 063
01622 769 572
0161 9412 666
0161 241 1851
01942 233 876
01623 622160
01642 677881

01603 766402
01604 267840
0115 956 1811
01733 311770
01752 254050
01202 717913
01752 703263
0114 258 0631
0208 3042069
023 8055 7788
01702 483 742
01782 287321
0191 510 8773
01792 792969
01793 491717
020 8892 917
01925 630 937
01942 323 785
01902 494186
01905 723451

Contents

9 More Versatility for the Diamond Tool Holder

A guide to adapting this popular toolholder for smaller toolbits from R. Finch.

17 Building the Noci ELS

Duncan Webster fitted an electronic leadscrew to his lathe after seeing Joe Noci's build log on our forum.

22 Theasby's Wrinkles

Geoff Theasby makes a heavy duty hinge for an awkward spot.

25 A Digital Readout for A Myford Series 7 Lathe

Jacques Van Damme fits wire encoders and Bluetooth to bring his lathe into the 21st century.

32 Obituary: David Piddington

We mark the passing of a respected designer of models and workshop tooling.

32 Beginners' Workshop


In this issue Geometer looks at sharpening some workshop tools.

33 Model Engineers' Workshop Data Book

This month's data book pages cover a range of different screw threads.

37 Developing an Edge Finder

Roger Vane concludes his detailed description of an electronic edge finder, with instructions so you can make your own.

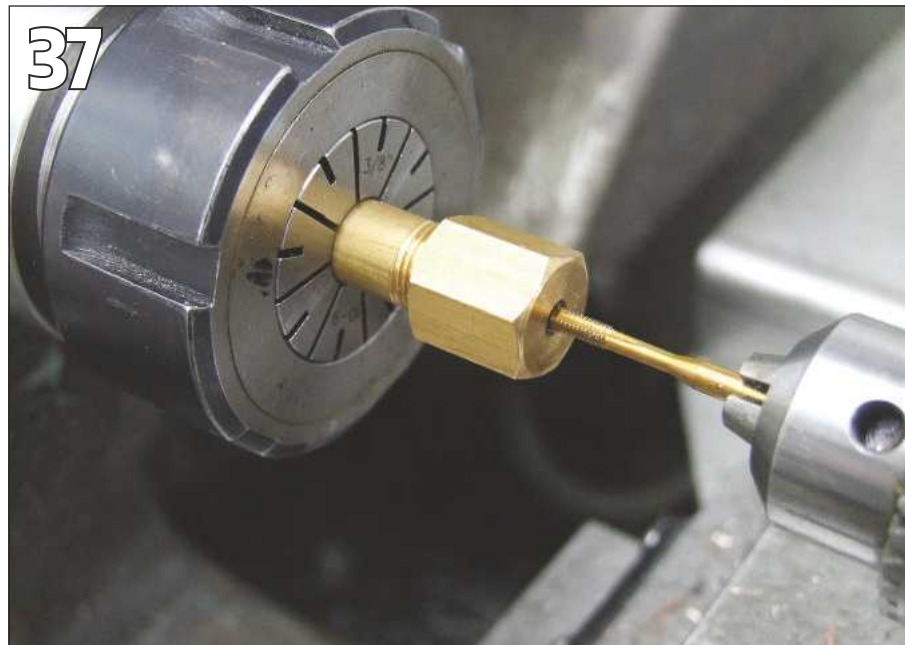

40 An Easy Tapping Guide

An essential accessory for every workshop for you to make, explained by Bob McMenemie.

42 Introducing Milling Machines

Advice for beginners on milling machines and some of the different cutters you will encounter.

48 A Vertical Drilling/Milling Slide for The Small Lathe

Terry Gorin describes the construction of a vertical slide to suit most small lathes.

56 Testing a Three Phase Motor

David Dunn demonstrates a circuit to

generate a basic three phase supply from a single phase one.

58 Fitting a Screwcutting Clutch to the Emco Maximat Super 11

Graham Meek gives further details of this intriguing device.



SUBSCRIBE TODAY!

GET YOUR FAVOURITE MAGAZINE FOR LESS DELIVERED TO YOUR DOOR!

See page 48 for details.

Coming up...

in our next issue

In our next issue we feature a rear toolpost designed by regular contributor, Howard Lewis.



Regulars

3 On the Editor's Bench

It looks like the return of model shows is on the horizon.

20 Scribe A Line

Consider a carefully curated crop of correspondence, compliment and critique.

21 On the Wire

News from the world of hobby engineering.

15 Readers' Tips

This month's tip looks at the fitting of small o-rings over large shafts.

64 Readers' Classifieds

More of your sale and wanted ads.

ON THE COVER >>>

A Bridgeport milling machine is lightly built by industrial standards, but probably the largest practical option for a hobby workshop. Our introductory article on page 42 offers some more modest alternatives.



HOME FEATURES WORKSHOP EVENTS FORUMS ALBUMS

Visit our Website

www.model-engineer.co.uk

Why not follow us on Twitter:
twitter.com/ModelEngineers hashtag #MEW



THIS MONTH'S BONUS CONTENT

Log on to the website for extra content

Visit our website to access extra downloads, tutorials, examples and links.

www.model-engineer.co.uk/extracontent

Joe Noci's Electronic Lead Screw

See what inspired Duncan Webster's ELS project in the thread:

Enhancing a EMCO Maximat V10P Lathe using Electronics - ELS Et-Al...

The thread has plenty of useful images and discussion.

Plus:

What is your favourite "unusual tool that you find useful"?

Why not share yours?

Taper due to tailstock height misalignment

Is it an issue... or not?

Can one buy pliers with parallel jaws that lock like mole grips?

Do you have any examples?

Come and have a Chat!

As well as plenty of engineering and hobby related discussion, we are happy for forum members to use it to share advice and support. If you feel isolated by the lockdown do join us and be assured of a warm welcome.

CLASSIFIEDS EXTRA SUBSCRIBE ARCHIVE SUPPLIERS

**MARKET LEADER IN LARGE
SCALE, READY-TO-RUN,
LIVE STEAM**


The 3F "Jinty" Class

Some 425 of these locomotives were manufactured between 1924 and 1931. Mainly allocated to shunting and station pilot duties they also undertook occasional branch line work. The "Jinties" were frequently used for banking duties with up to three at a time seen assisting express passenger trains up the Lickey Incline on the Bristol-Birmingham line near Bromsgrove. They were frequently seen banking trains out of London Euston up to Camden - a particularly demanding task!

Designed by Sir Henry Fowler for the London, Midland and Scottish Railway they were based on earlier designs by S&W. Johnson.

Some of the locomotives were loaned to the War Department in WWII, providing welcome logistical support to the allied war effort.

A majority of locomotives enjoyed long service with the final "Jinty" withdrawn in 1967, right at the end of the steam era. The locomotives were always painted in un-lined black livery. Before nationalisation in 1948 LMS initials were carried on the tank sides. In BR service either lion crest was carried according to period.

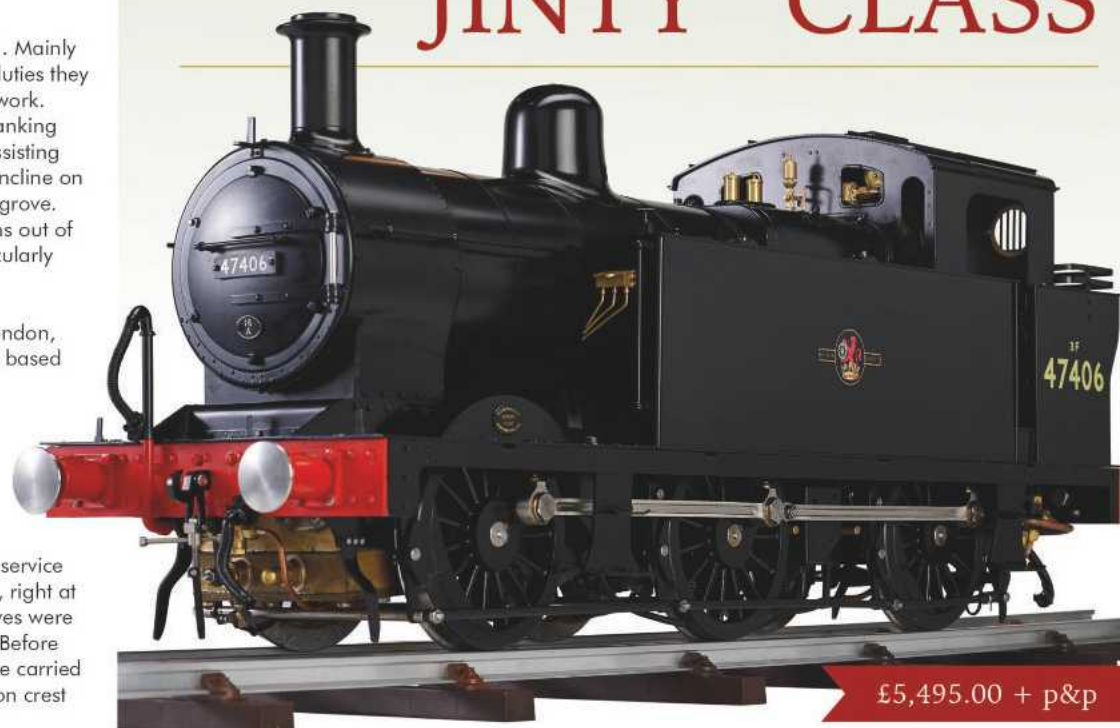

Summary Specification



Approx length 33"

- Stainless steel motion
- Boiler feed by cross head pump, injector, hand pump
- Etched brass body with rivet detail
- Two safety valves
- Choice of emblems
- Painted and ready-to-run
- Coal-fired live steam
- 5" gauge
- 2 inside cylinders
- Slide valves
- Stephenson valve gear
- Drain cocks
- Mechanical Lubricator
- Silver soldered copper boiler
- Multi-element Superheater
- Reverser
- Approx Dimensions:
Length: 33"
Width: 9.5"
Height: 14"
Weight: 44kg

The 5" Gauge Model

We have introduced the "Jinty" to our growing range of models due to requests received from a number of customers who are keen to own one. At just £5,495.00 + shipping this 5" gauge model offers unbeatable value-for-money. The model is coal-fired and its 0-6-0 wheel arrangement provides a powerful locomotive capable of pulling a number of adults. Its ability to negotiate tight curves makes it a perfect candidate for your garden railway. The model is delivered ready-to-run and painted with your choice of LMS lettering, or BR crest.

Each is complete with a silver soldered copper boiler, hydraulically tested to twice working pressure. All boilers comply with the latest regulations and are appropriately marked and certificated. The locomotive's compact size makes this an ideal model to display, transport and drive. As testament to our confidence in the high quality of this model we are pleased to offer a full 2 years warranty. Our customer service is considered to be second-to-none.

The "Jinty" is a powerful locomotive for its size and can negotiate tight curves, making it ideal for a garden railway. It incorporates our latest technical improvements including mechanically operated drain cocks. As an award winning professional model maker I am delighted to have been involved in the development of this first class live steam locomotive"

Mike Pavie



Delivery and Payment

Save £195.00. Free p&p for any order received within 28 days.

The order book is now open and we are happy to accept your order reservation for a deposit of just £995.00.

We will request an interim payment of £2,000.00 in August 2021 as the build of your model progresses, a further stage payment of £2,000.00 in November and a final payment of £500.00 in January 2022 in advance of delivery



Request your free brochure today

Request your free brochure today by e-mail, telephone, or by returning the coupon opposite.

Telephone: **01327 705 259**

E-mail: **info@silvercrestmodels.co.uk**

Find more information at

www.silvercrestmodels.co.uk

Please send, without obligation, my free 5" gauge "Jinty" brochure.

Name: _____

Address: _____

Post Code: _____

Please send to: Silver Crest Models Limited,
18 Cottesbrooke Park, Heartlands Business Park,
Daventry, Northamptonshire NN11 8YL

MEW

Company registered number 7425348

More Versatility for the Diamond Tool Holder

R. Finch adapts his Diamond tool holder to accept smaller toolbits

Over the years, I have struggled with re-sharpening lathe tools and now I have a large collection of weirdly shaped toolbits, none of which seem to give a good finish on any work. In view of this, I purchased a 'Diamond' tool-holder from Eccentric Engineering at the Doncaster Exhibition for use on my 4" centre height lathe, **photo 1**. The tool-holder has proved to be excellent in performance and I now use it for all my straightforward turning (usual disclaimer). I also bought their grinding jig for re-sharpening the toolbits. I already had four $\frac{1}{4}$ inch square toolbits which would do for replacement toolbits as I used up the toolbit supplied with the tool, so I felt that these might outlast me. However, I also had a large quantity (12) toolbits which were $\frac{3}{16}$ inch square, so I asked at the Doncaster stand whether the tool-holder could take these $\frac{3}{16}$ inch square toolbits. The answer was no – it would only take $\frac{1}{4}$ inch square or round toolbits.

Holding smaller toolbits

Looking at the tool-holder, it seemed to me that it would be possible to insert a small 'L' shaped packing piece onto a $\frac{3}{16}$ inch square tool to make it up to $\frac{1}{4}$ inch square so that the tool-holder would grip the toolbit and packing piece





The 'Diamond' tool-holder

as one and hold the smaller toolbit securely. After a bit of thought, I decided that machining from the solid would be easier than trying to bend a bit of 1.6mm thick sheet into an L-shape. The dimensions are as in **fig. 1** and just to make the drawing clear, the item is shown in **photo 2** and fitted to the tool-holder in **photo 3**. The small flange at the top is there to stop the packing piece falling out of the tool-holder when fitting the toolbit into the tool-holder.

Making the packing piece

I started off with a length of 8mm square mild steel bar and machined it down by 1.5mm for a length of 18mm. Using the vice stop and table stops, I turned the bar through 90° towards the front of the milling machine and again machined it down by 1.5mm, but only for a distance of 13.5mm. To mill the recess, I rotated it a further 180° and this time machined it down 5mm wide by 5mm deep to form the recess for the $\frac{3}{16}$ inch square tool. I machined this recess

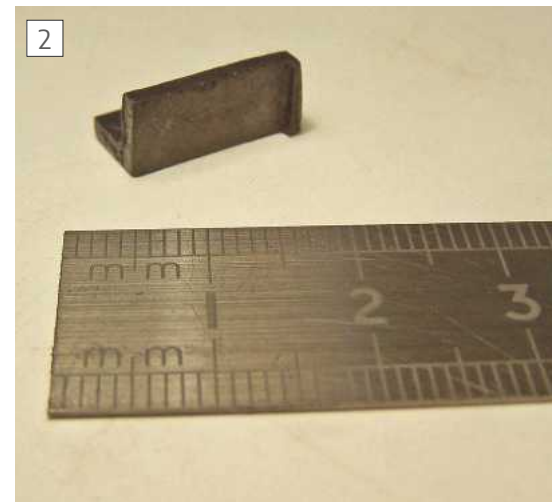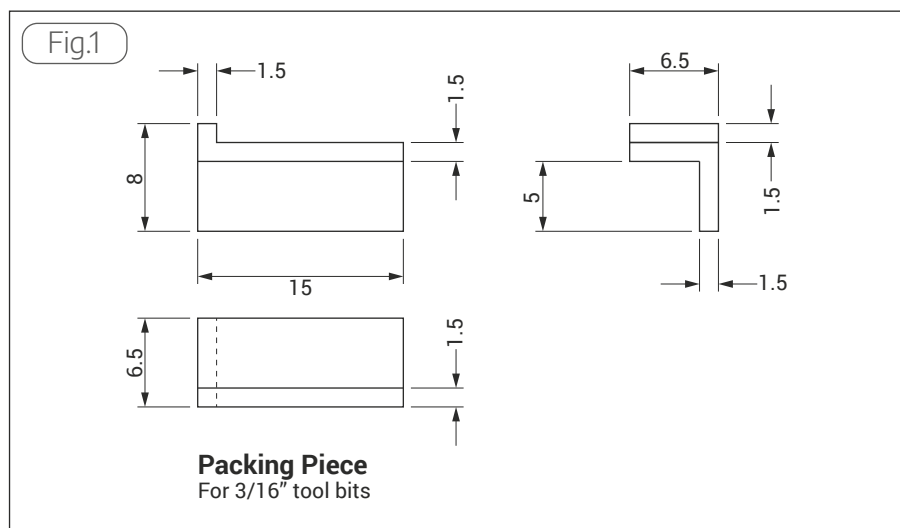

The packing piece



The $\frac{3}{16}$ inch square toolbit with the packing piece

18mm long. I had to make sure that the 'flange' was on the right part to sit onto the top of the tool-holder. This can be seen in **photo 3**. At this point I simply sawed off the small piece and filed the end smooth. This now effectively makes the tool-holder smaller for the $\frac{3}{16}$ inch toolbit and the toolbit and packing piece are the same size as the standard toolbit supplied. I made another with a smaller 3mm recess so as to take $\frac{1}{8}$ inch square or round toolbits if needed, **photos 4 to 8**. The dimensions of this packing piece are shown in **fig 2**.


Re-sharpening

Now that I could grip a smaller toolbit in the tool-holder, it only required sharpening. Unfortunately, a smaller toolbit could not be secured in the original sharpening jig supplied with the tool-holder, **photo 9**. I did contemplate making a similar packing piece to fit the jig but decided that it might be a bit difficult to make it just the right size, so I decided to make a separate jig to hold the toolbit for sharpening using the bench grinder.

The instruction sheet that came with the tool-holder showed how to grind the toolbit using a standard 200mm diameter grinding wheel – all the correct angles were built into the jig, so unskilled tyros like me hopefully could re-sharpen the toolbit correctly. However, the sharpening jig supplied by Eccentric Engineering was designed to take $\frac{1}{4}$ inch square toolbits and to be used on a standard 200mm bench grinder by being placed on the flat tool rest. The instructions also stated that



The first cut is the deepest!

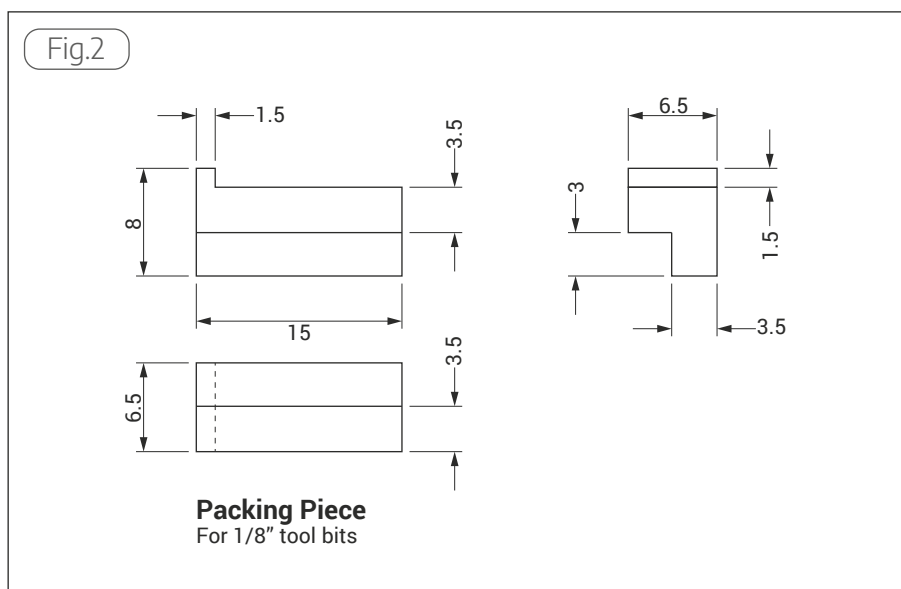

"On a smaller grinder you will have to drop the tool rest below centre" which was helpful but did not state by how much. I have a standard 150mm bench grinder so needed to determine by how much the rest needed to be lowered.


The tool is fixed in the jig such that the top edge of the toolbit is anywhere between 17 and 20mm above the tool rest, depending on the amount protruding from the jig when set for a 200mm wheel. When using a 150mm wheel, there is a reduction to three-quarters of the diameter, so to maintain the geometry, the toolbit height would have to be reduced in direct proportion, so instead of the tip of the toolbit being say 18mm above centre height, it would need to be three-quarters of 18mm or 13.5mm. As the original tool grinding jig holds to tool 18mm above the centre

line, it would have to be lowered by $18 - 13.5 = 4.5\text{mm}$ for the 150mm wheel. Whilst this does indeed set the tool jig height correctly, it then leaves the 'flat' diamond face distinctly hollow ground because of the curve of the grinding wheel. Smaller wheels exacerbate the problem of the hollow ground curve.

As a consequence of this difficulty of setting the grinding wheel rest down by 4.5mm, I decided to design my own jig to hold the toolbit. It would have to satisfy two criteria in that it would have to be straightforward to set up and it would have to take any size of toolbit since I could now use $\frac{1}{8}$ th, $\frac{3}{16}$ th or $\frac{1}{4}$ inch square and round toolbits.

The sharpening jig re-designed

Previously, I had modified a bench grinder to take a cup grinding wheel so

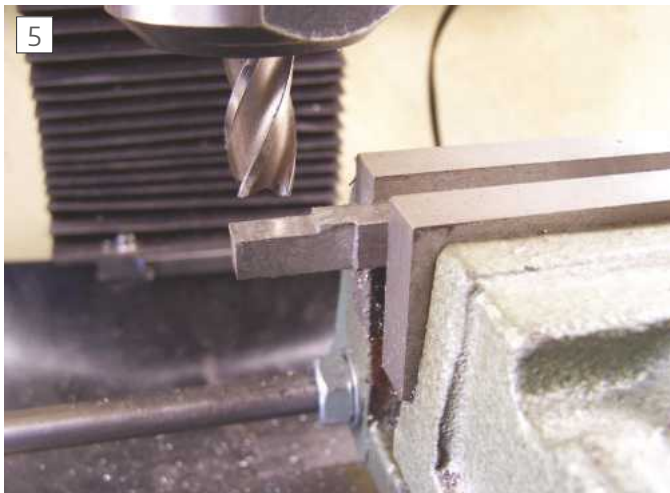

The second, shorter cut



The recess for the toolbit



The packer still attached to the parent metal

to the wheel, **photo 11**. The template has a 33° angle on it and the black line is level with the tip of the toolbit when placed on the grinding rest. The hollow ground tool works just as well as a flat ground tool, but it is a little less repeatable when re-sharpening as the tangent has to be set by eye.

Building the jig

This is quite simple to make but holding the 12mm square steel bar to mill the vee groove was not easy. The material of the bar is not critical – I used 080A15, but any mild steel can be used. The first thing that I did was to machine the 33° angle on to the end of the parent bar before setting up to mill the vee groove (fig 3). Eventually, after trying my tilting angle vice and various V block arrangements, I came up with the set-up shown in **photo 12**. Note that although the front clamp looks as if it is tilted, it

I could use the flat surface of the cup to grind the diamond shaped surface to be flat rather than hollowed. Fortunately, the instructions supplied with the tool-holder (ref 1) stated that the correct geometry would be such that the diamond shape is at 57° from the front to back corner, so I made a simple jig, **fig. 3**, to hold the toolbit square on to the grinding wheel with the tool rest set at the complementary angle of 33° to the wheel, photo 10. This jig sits on the grinding rest against a simple parallel fence to allow the jig to slide sideways to allow the toolbit to move across the surface of the wheel. The toolbit is simply held into the groove and against the grinding wheel by finger pressure and can be easily removed for inspection during the sharpening process.

This jig can also be used on a standard grinding wheel, providing that the tool-rest on the grinder is set to the tangent

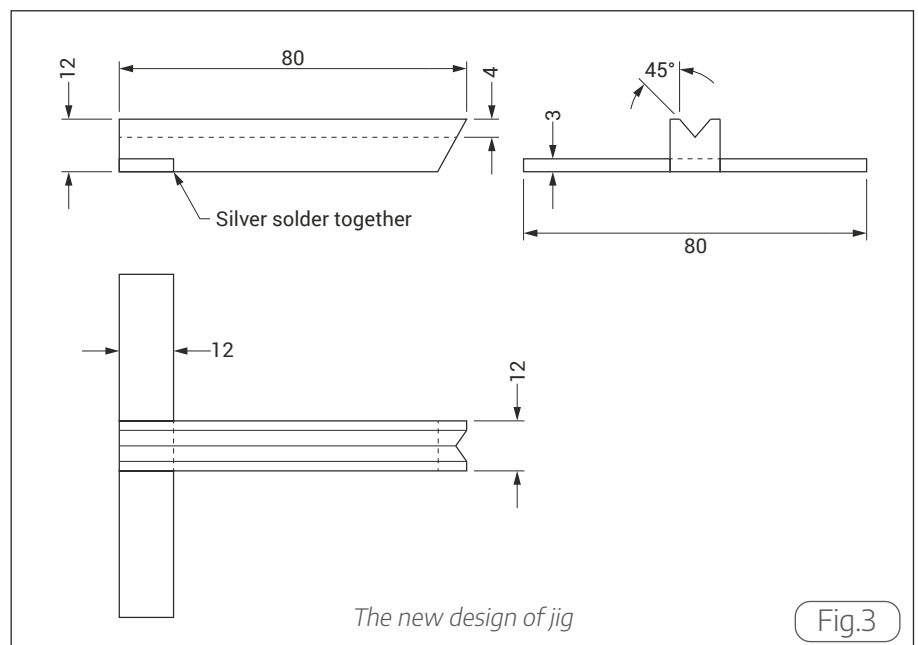


Fig.3



The packers – 3/16 on the left and 1/8 on the right



The grinding jig supplied with the tool-holder

is actually vertical – it is just the macro lens on the camera which is distorting things slightly. This set-up allows full visibility of what is actually going on, but the bar is a bit long with a considerable overhang. To minimise the risk of chatter with such an overhang, I used a new slot drill (my slot drills do not get sharpened yet as I have not made a suitable jig to sharpen them). Very light cuts were taken but quite quickly the groove was machined in without problems.

Having machined the vee groove, I cut off the appropriate length of the bar, faced the end off and machined the recess to take the guide bar. This was 12mm wide and 3mm deep. The vee groove must not be deeper than 6mm or else when grinding a long toolbit, the end of the toolbit will be lifted up by the grinding rest fence and the angle ground on the end of the toolbit will be incorrect. I did use a hacksaw to cut a very small groove into the bottom of the vee to make sure that the toolbit would always sit properly in the groove. If the cutter used to make the vee does not have really sharp corners, then it is possible that the vee will have a slight radius at the bottom – the hacksaw groove eliminates this very simply and effectively.

The steel guide bar is then silver soldered to the bar containing the vee groove. I took care to ensure that the guide was at 90° to the bar, but a slight error here will make little difference to the angle ground on to the toolbit. It is good enough if it looks at 90° measured by using an “engineer’s eye”. Obviously, the dimensions of the jig will need to be varied to suit your own grinder. After cleaning up, I decided to give the jig and the two packing pieces a rust resisting black oiled finish by heating


up and dunking each part in oil, **photo 13**. I use rapeseed oil as this has a high flash point and is of a reasonably low viscosity when cold. It is also suitable for vegetarians and those with a nut allergy. I cannot be allergic to nuts myself as I have dozens of them in the workshop in all sorts of sizes and materials.

Using the new jig

The grinding rest is set at the appropriate angle (33°) using a small aluminium angle gauge (photo 10). As the grinding wheel is flat, it is easy to set the grinding rest repeatedly at the correct angle, so minimising the amount to be ground off when resharpener. The jig is placed on the grinding rest with the toolbit held in the vee groove by finger pressure and held against the

face of the wheel whilst being traversed across the face. The sharpening is quick and progress can be viewed easily by just lifting the toolbit out of the vee and it can be replaced exactly in the same way. This system will take any size of square or round toolbits, as the bottom of the vee groove is above the fixed fence on the grinding rest so the tool can be any length, **photo 14**. Note that this photo was taken with the grinding wheel stationary for obvious safety reasons. Although it looks as though the jig is in contact with the wheel, there is a clearance of about 2mm.


For turning brass, the tool-holder manufacturer suggested honing a small flat on the tip to prevent dig-ins, which seemed a good idea but would require it to be ground off again when reverting

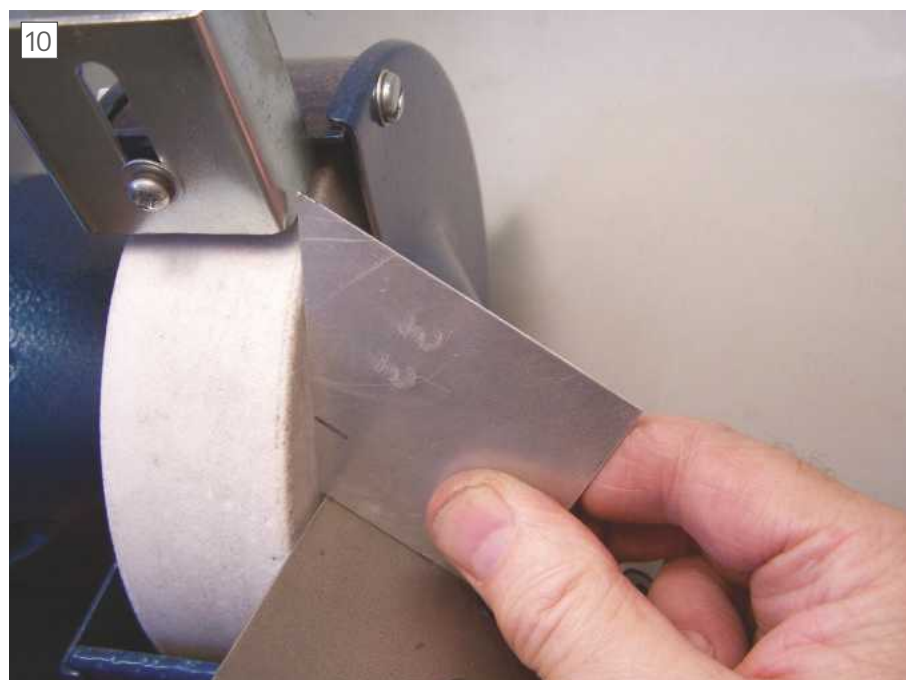

Setting the tool-rest at 33° using a template




Setting the 33° angle as a tangent to the wheel

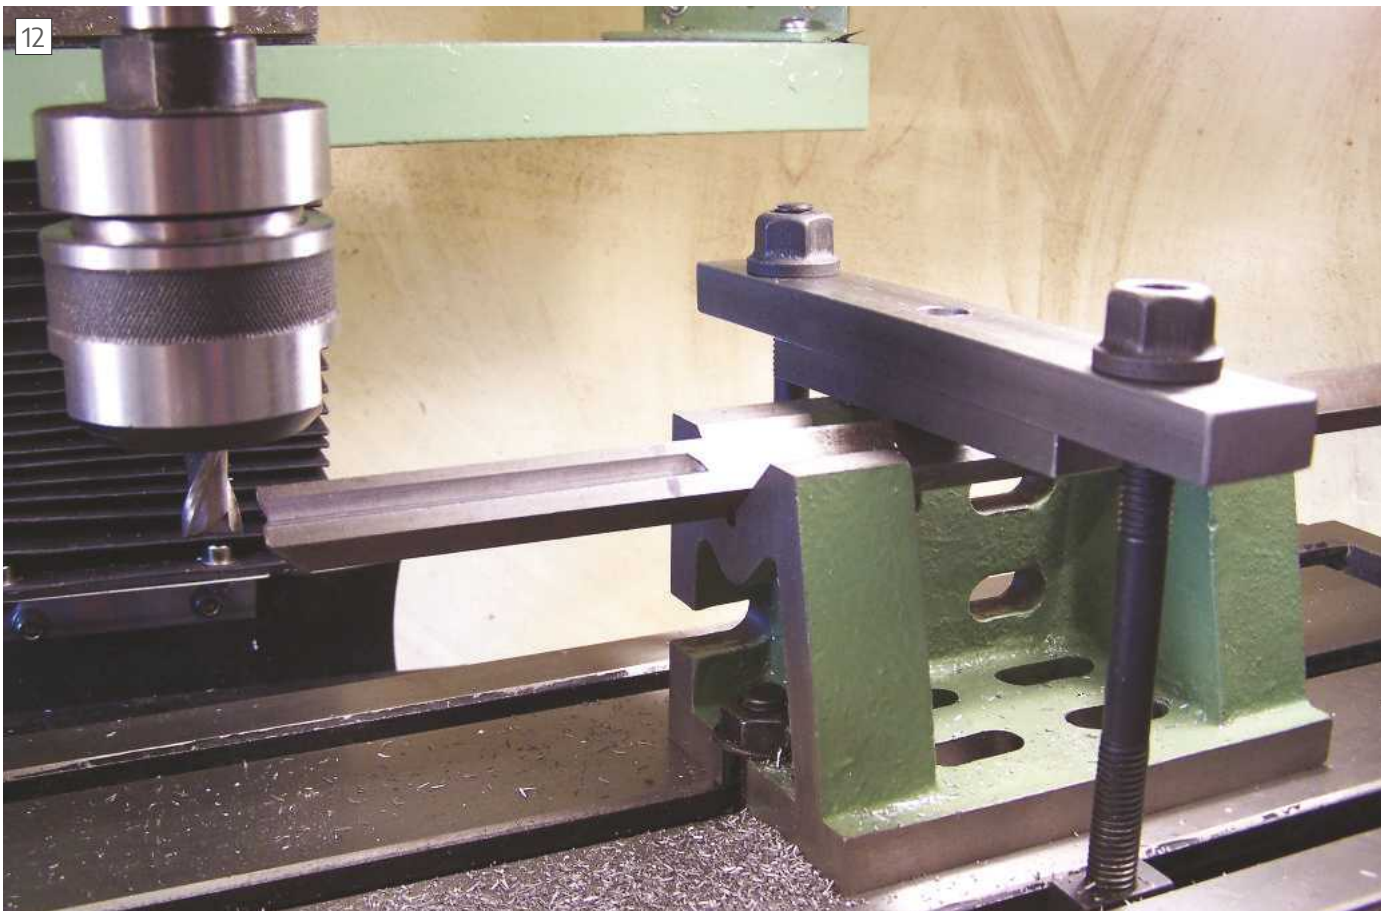

The set-up for machining the 45° vee



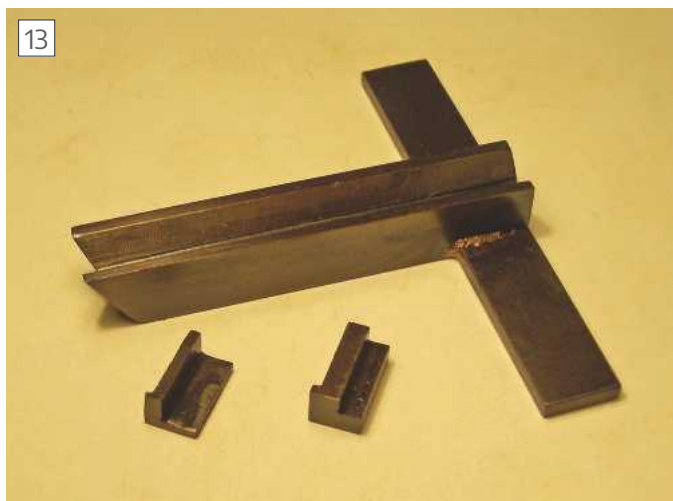

The finished jig and packing pieces with their oiled finish



Grinding the end – posed picture

to turning steel. It seemed to me that a second tool ground without any top or side rake would be simpler as it could be reserved for brass and would not require a re-grind when changing back to steel. However, the supplied jig would not be able to do this and I would be back to free-hand grinding with the weird angles appearing as I tried to get the tool correctly ground. In order to get the top flat with no side or front rake, the angle of the tool-rest has to be set at 14°

instead of 33° , so a simple setting can be arranged using a second template. When a round toolbit is used, care is required to avoid the bit rotating in the vee but, with a bit of practice, a good flat surface can be formed. This allows round toolbits to be ground for forming radii when turning.

Conclusions

The Diamond tool-holder is an excellent piece of equipment (usual disclaimer)

and the versatility of it can be increased simply by small additional packing pieces. The simple jig described allows the resharping of any size tool bit. Resetting the grinder rest at 14° allows a toolbit to be ground without any side or front rake for turning brass. ■

Reference

Instruction leaflet for The Diamond Tool Holder, Eccentric Engineering, www.eccentricengineering.com.au

MODEL ENGINEER

NEXT ISSUE NEXT ISSUE NEXT ISSUE NEXT ISSUE
NEXT ISSUE NEXT ISSUE NEXT ISSUE NEXT ISSUE
NEXT ISSUE NEXT ISSUE NEXT ISSUE NEXT ISSUE

NEXT ISSUE

LMS 6202

Mike Tilby examines the design of the steam turbines in LMS locomotive 6202.

Riveting

Luker expands on riveting.

Train 2 Train

John Arrowsmith takes a look at a venture designed to maintain our future supply of young engineers.

Content may be subject to change.




ON SALE 18 JUNE 2021

Readers' Tips



Fitting Small O-Rings

**TIP OF
THE MONTH
WINNER!**

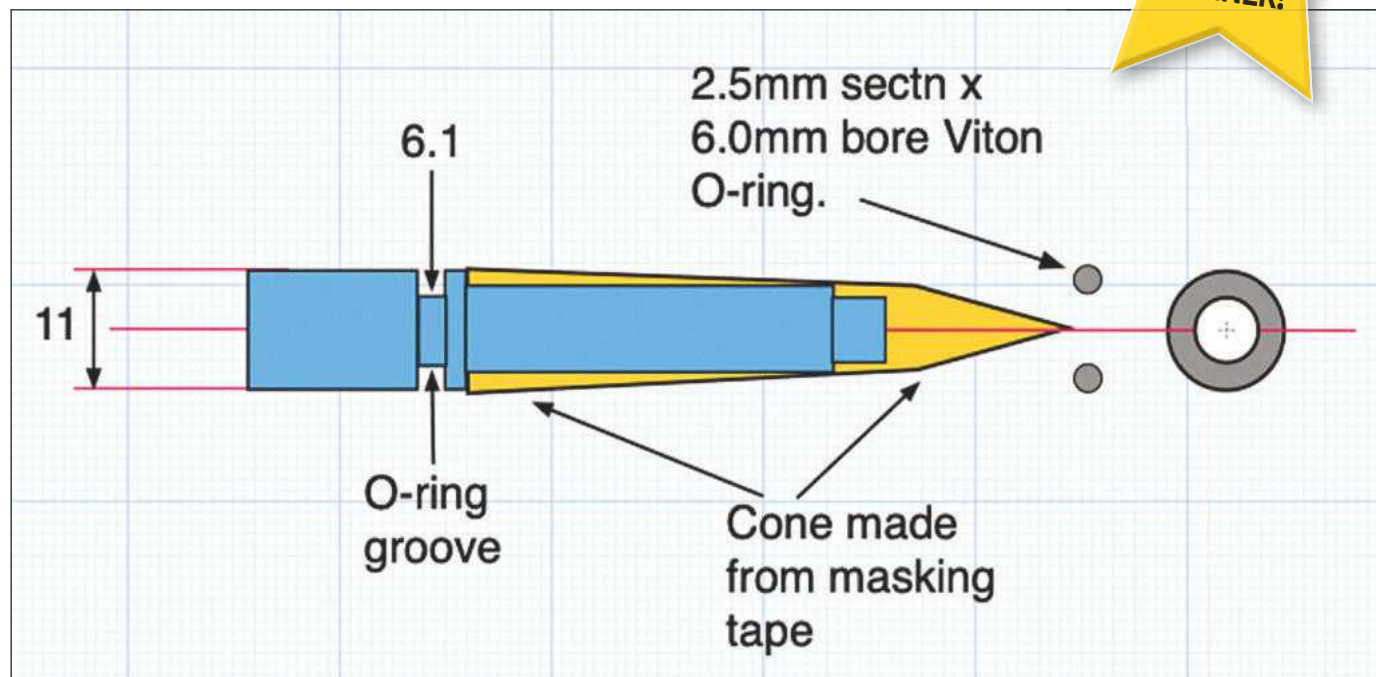

This month our lucky winner of £30 in Chester gift vouchers is Nigel Morgan from Suffolk who offers some practical guidance on the use of fiddly little o-rings.

The task was to fit a small Viton O-ring (2.5mm section x 6.0mm bore, making external diameter 11.0mm) to its groove in a brass shaft (unfortunately I omitted to take a suitable photo at the time).

At first sight it appeared inconceivable that this tiny O-Ring could stretch sufficiently to get into place in its groove without breaking or at least suffering damage in the process. However, the following procedure (found courtesy of a Google search) worked well and might help others contemplating the same problem.

Firstly, the edges of the O-ring groove were very carefully smoothed with the finest emery paper to remove any sharpness but without rounding them significantly.

Then the four O-Rings were boiled in a small tin for at least 15 minutes (no seasoning is needed!). While this was going on, the brass shafts (which included a threaded portion in my case) were wrapped in masking tape in a conical shape so that

the larger end made the same diameter (11.0mm) as the largest part of the shaft. Thus, the idea is that when the O-ring is slid on, this cone will progressively stretch it from 6.0mm at the small end to 11.0mm (internal diameters) at its largest. Finally, the cone and the O-ring groove were liberally smeared with O-ring lubricant.

The shaft was then arranged vertically in a vice (using soft jaws to avoid damage) and the hot O-ring fished out of the boiling water and slid on to the cone as quickly and firmly as possible – all in one easy movement. When it reached its final destination (the groove) it simply dropped into place and contracted to its former diameter immediately without any apparent damage. My packet of O-rings included a spare, so I was able to experiment first (always a good idea) before tackling the job for real – there were four to be done.

I was frankly amazed that it all worked so well and would say “don’t forget Google” for other workshop conundrums that arise.

Nigel Morgan

We have £30 in gift vouchers courtesy of engineering suppliers Chester Machine Tools for each month’s ‘Top Tip’.

Email your workshop tips to neil.wyatt@mytimemedia.com marking them ‘Readers Tips’, and you could be a winner. Try to keep your tip to no more than 400 words and a picture or drawing. Don’t forget to include your address! Every month I’ll chose a selection for publication and the one chosen as *Tip of the Month* will win £30 in gift vouchers from Chester Machine Tools. Visit www.chestershobbystore.com to plan how to spend yours!

Please note that the first prize of Chester Vouchers is only available to UK readers. You can make multiple entries, but we reserve the right not to award repeat prizes to the same person in order to encourage new entrants. All prizes are at the discretion of the Editor.

MAXITRAK.COM

Finance available
Terms and conditions apply

The best of model rail and road.

Tel: 01580 893030 Email: info@maxitrak.com



5" Gauge Class 25

Kit From £2,075
Ready to Run
£4,490

5" Gauge Planet


Kit From £1,195
Ready to Run
£1,295

Four Livery Options
Available



5" Gauge Alice Kit From £3,995 Ready to Run £4,480

Live Steam
Limited Quantity
Remaining

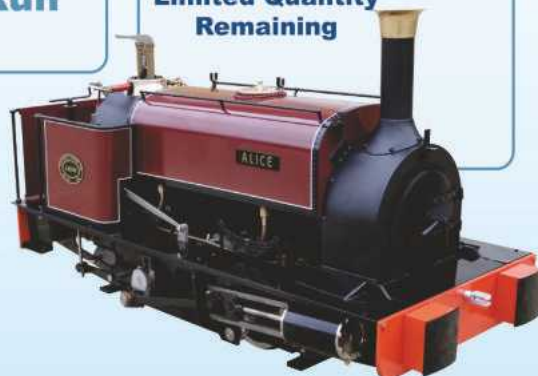

**TIG
Welded
Boilers**

MAIDSTONE-ENGINEERING.COM
Brand New Website Live Stock System

One stop model
engineering shop


Leading suppliers of fittings, fixings,
brass, copper, bronze and steel

Call us on 01580 890066
Visit us 10-11 Larkstore Park, Lodge Road, Staplehurst, Kent, TN12 0QY

**MAIDSTONE
ENGINEERING
SUPPLIES**

Don't know what it's worth?

- Good prices paid for all live steam models
Locomotives from gauge 1 to 10 1/4 inch
Traction engines to 6 inch scale
Part-built or broken through to exhibition quality
- A no-obligation offer and firm decision
over the telephone
- Fully-insured collection nationwide
- Payment in full on collection

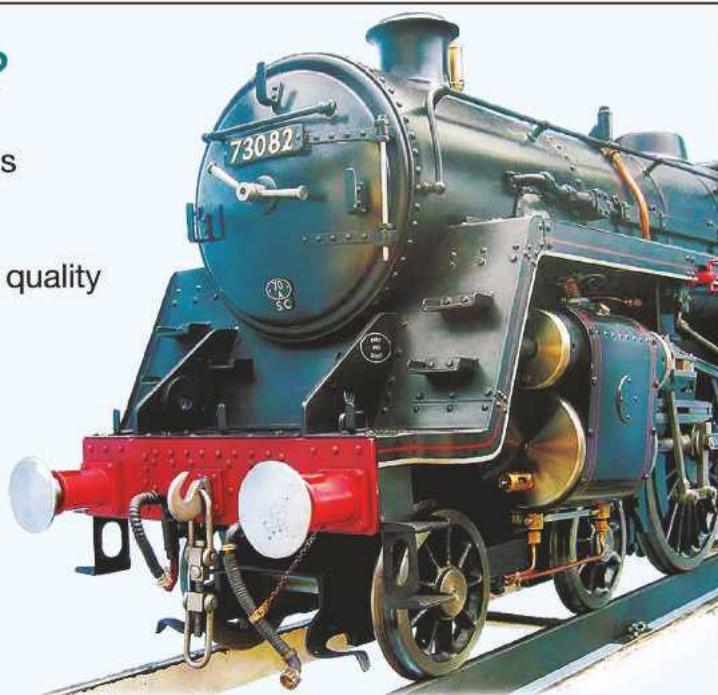

Speak to the experts

STATIONROADSTEAM.COM

Build, buy & sell all types and sizes of locomotives, traction & stationary engines

Call Mike or Jayne Palmer on 01526 328772

Station Road Steam Ltd, Unit 16 Moorlands Industrial Estate, Metheringham, Lincs LN4 3HX

Open daily Monday to Friday from 8am to 6pm, visitors welcome by appointment


Building the Noci ELS

Duncan Webster builds an Electronic Lead Screw for his lathe.

Possibly one of the least helpful titles for an article! The answer to the first query is easy, Joe Noci designed the electronics, I just built it, and if I can do it so can you. There is no need to understand the software, just wire it up and it works. (Joe's build is documented on the Model Engineer forum in the thread "Enhancing a EMCO Maximat V10P Lathe us-ing Electronics - ELS Et-Al..." at www.model-engineer.co.uk/forums/postings.asp?th=125682)

So what is an ELS? It's an Electronic Leadscrew for your lathe, instead of being driven by change wheels/ Norton gearbox, the leadscrew is driven by a stepper motor. My lathe is a metric Myford 254S, it does have a screwcutting gearbox, but even to get the full range of metric threads I have to change the drive gear setup, to cut imperial some really odd combinations have to be set up, and I really hate fiddling with changewheels. With the ELS I can cut imperial and metric threads with equal ease, and it stops under electronic control, so no panic stricken grabs for the half nut lever. As a bonus extra it will work in normal turning mode, allowing me to change the feed rate on the fly to optimise surface finish.

So how does it work? A stepper motor is a specialised motor which advances

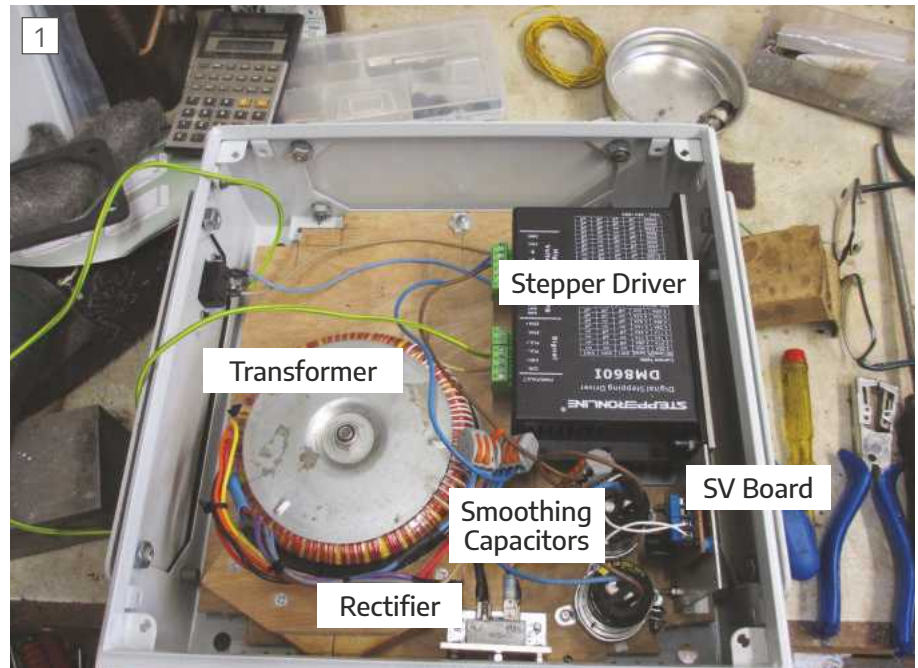


PSU with driver.

by a small angle every time a pulse is sent to it's driver unit. In my case the motor/driver combination is set up to rotate 1/400 turns for one pulse, and the leadscrew is driven by a 2:1 tooth belt, so one pulse = 1/800 leadscrew turns. Driven by a second much smaller tooth belt direct from the lathe spindle we have an encoder (**ref. 1**) which

outputs a train of pulses as the spindle rotates, in my case 1000 pulses per rev. It makes the following explanation a lot more understandable if for the moment we assume 800 pulses per rev. The electronics doesn't care.

If every time the electronics receives a pulse from the spindle encoder it outputs a pulse to the stepper driver, the leadscrew will rotate at the same speed as the spindle and as I have a 3mm pitch leadscrew I would cut a 3mm pitch thread. If The electronics outputs a pulse every 2 spindle pulses I would cut 1.5mm pitch and so on. What if I want to cut 2mm pitch? I'd like to send a stepper pulse every 1.5 spindle pulses, but you can't have half a pulse. What it does is send a stepper pulse after 1 spindle pulse, then after another 2, then after 1 and so on. The error involved is very very small, and is not cumulative. This technique can be extended to any required thread pitch using a bit of clever maths called Bresenham's Algorithm. This need not trouble us further, if you want more information Google it, it is built into Joe's software, and it just works.


This would all be very well if we only wanted to do one pass, but we want to do lots, and to maintain alignment

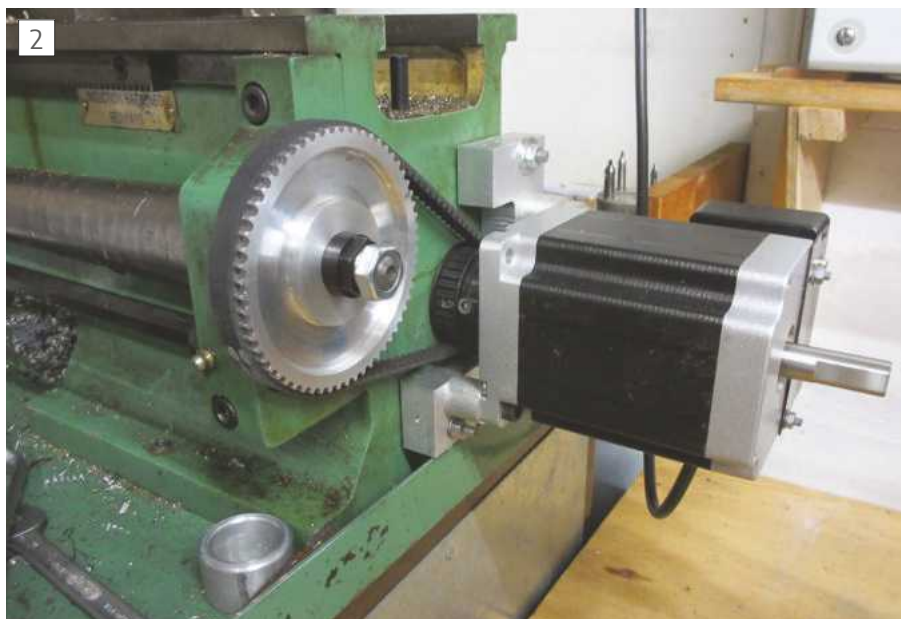

Stepper 1.



Encoder.

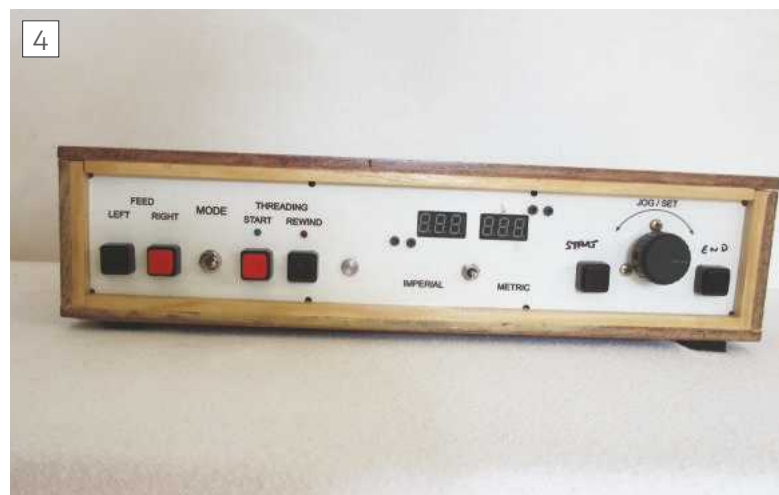

Front panel.

between subsequent cuts. To achieve this the spindle encoder is a bit cleverer than so far indicated. The 1000 pulses come on 2 channels giving what is called a quadrature output, this enables the electronics to know which direction the spindle is turning, and there is a third channel (Z) which outputs one pulse per rev. If we always start the pass with the saddle in the same position along the bed and the spindle in the same angular orientation, then alignment is assured. What we do is before the first pass position the saddle clear of the job to the tailstock end and press a button to define 'thread start', with the half nuts engaged advance the saddle along the bed using the stepper motor to the left hand end of the thread and press 'thread end' (prosaic lot us engineers!). The electronics counts the steps, so it knows where the saddle is relative to the start point. Then press 'rewind' to return the saddle to the start position. Due to backlash in the leadscrew/half nuts this isn't necessarily exactly the same as the first start point, but it doesn't matter, as soon as the stepper starts driving to the left this backlash will be taken up. When you then press 'start' the electronics waits until it gets the one per rev spindle pulse before it starts the stepper, when you reach the end of the thread it stops the stepper and you can back out of the cut, press 'rewind', advance the tool and carry on. This all relies on the stepper motor being able to start the leadscrew from stopped to full speed within one spindle revolution, which is why you need such a big stepper motor. My set up will reliably cut 3mm pitch at 150 rpm, at 190 rpm it starts to miss the odd pulse, at 200 rpm it gives up the ghost completely. At 150 rpm and 3mm pitch the saddle is moving down the bed at 450mm per minute which is quite fast

enough for me thank you. I've had it doing 1mm pitch at 500 rpm, even faster. Later on, we'll see how to improve this performance if you wanted.

Note that with this setup, if the spindle slows down when the tool contacts the work it doesn't matter. I am led to believe that this is not the case with Mach3.

By selecting 'feed' instead of 'thread' you can then set a feed rate in mm/sec. This does not require synchronisation with the spindle, so the spindle encoder is not used, good job as the pulses would be coming a bit fast at 2000 rpm, even this electronics has its limits. You can change the feed rate during cutting. The 254 has a separate hexagonal feed shaft for doing plain turning and facing. When using this, feed rates are 1/6 of what they would be if you were using the leadscrew. Currently the electronics doesn't allow for this (it could do) but this is not as bad as it sounds, if you just divide the spindle rpm by 100 and set the feed rate to this figure in mm/sec you actually get a rate of 0.1mm per rev, which is not a bad starting point. I used 4 thou per rev for years on my ML7, it didn't have a screwcutting gearbox, and as I said earlier I hate messing with changewheels. This hex feed shaft is driven from the leadscrew by a pair of gears inside the gearbox. I can disengage the gearbox entirely, but when the hex shaft is turning so is the rest of the gearbox.

So having gone through the basics of how it works, how is it implemented? Start with the power supply. If you don't have a well-equipped junk box, the easiest way would be to buy a 60v 5A switch mode power supply. I had a 35V toroidal transformer, rectified and smoothed this gives about 50V, and it seems to work OK. The 5V needed to power the electronics was derived from

a few turns of thin white flex round the toroid and a little board with bridge rectifier, smoothing capacitor and a 7805 voltage controller. Had I not already had all this in stock, a second 5V switch mode supply would be a lot easier, but being a Yorkshireman using what you've already got is very attractive. This is all shown in **photo 1**.

The stepper motor controller (**ref. 2**) was bought off ebay, as was the enclosure, which unusually wasn't the most expensive part, but I think I got it at a very good price. I made a plywood backplate to support everything inside the enclosure, the big transformer sits in a wooden cradle screwed to the backplate and lined with sponge. To let out any heat the rubber gaskets under the side panels were ditched and replaced with spacers so the panels stand off by a few mm. I have no intention of using this in the rain, and you'd have to try fairly hard to get in contact with any mains wires, which are in any case heat shrunk.

The stepper motor (**ref. 3**) (again off ebay) is mounted off a 20mm aluminium plate bolted to the end of the lathe bed. I had expected to have to adjust the thickness of the spacers under the three mounting bolts to get it all square, but it was pretty good with just one 3mm washer under each stud. The GT3 section belt was sized by scaling Joe's. I could fit bigger pulleys, so could get away with a narrower belt. I made a dummy motor (just a plate with the four mounting holes and a central spike for the pulley) so I could mount the pulleys in situ, get the belt tension right and spot through for the motor bolts. Slotted holes for the ally plate/bed studs allow final adjustment. The existing leadscrew had a woodruff key to allow fitting of a leadscrew

hand wheel, it looked a bit lightweight for this application, but I then found a taper lock bush device available from RS which could cope with the torque and only cost £12 (**ref. 4**). Saved having to cut another keyway if nothing else. This is all shown in **photo 2**. I will make a belt guard in the near future.

The spindle encoder, **photo 3**, is mounted on the existing change wheel quadrant and is driven by a small toothed belt. The drive pulley was bored out the same as a change wheel, and a very kind chap who I contacted via the ME forum put a keyway in it for me. I'm ashamed to say I've lost his details so I can't thank him here. He will know who he is. I was going to find a scrap change wheel and loctite the tooth belt pulley on, but this is altogether better.

Now to the clever bit. The front panel, **photo 4**, houses all the push buttons, display etc. I just drew it up in CAD, sent the dxf to an engraver and got it back finished to size, all holes in place for the princely sum of £15. Not worth bodging it at that price. Unfortunately, I forgot the 'thread start' and 'thread end' lettering, so that will be done on a separate bit and glued on. The material is Trafalite, a hard plastic laminate with 2 layers of white sandwiching a layer of black, thus if you engrave part way through you get black letters on a white background. The back panel is just 16g aluminium and supports the various sockets. The top, sides and base are plywood with glued on 6mm square to form slots to locate the front and rear panels.

The electronic brain is a Nucleo board, think Arduino on steroids. Rather than switching the pulses to the stepper motor direct from the Nucleo there is a little board carrying two transistors which form an interface. This board is also used as a splitter to provide 5V and ground to the various other bits that need it. Starting from the left we have feed left and right, mode to select between normal feeding and screwcutting, threading start and rewind. The display in the middle shows the tpi or pitch for screwcutting, or the feed in mm/sec for normal turning the switch underneath selects imperial or metric. The knob labelled 'jog/set' is another encoder, which is used to set the tpi/pitch/feed and to move the saddle along the bed to set thread start and end. With one exception this all went very easily, mainly because I just copied Joe's schematic. Where I had a problem was with the input from the lathe start/stop buttons. The electronics

need to know when the main spindle start/stop buttons have been pressed. I have a VFD (variable frequency drive) controlled by the original lathe push buttons. These buttons are momentary contact, so even if they had spare contacts wouldn't have been any use. With the help of yet another contributor to the ME forum I found at least one way of getting a signal from the VFD itself, but it turned out to be energised when the VFD output frequency fell below a low value. As the output frequency ramps down when the stop button is pressed, this signal did not appear until a couple of seconds or so after the stop button was pressed. Not good enough, I eventually finished up with another little board carrying a relay which reacts instantly to the buttons being pressed and gives a volts free set of contacts for the ELS electronics. All this is visible in **photo 5**.

Nothing is ever this simple though. When I installed my milling machine, I put it at the tailstock end of the lathe, far enough away so that the table traverse handwheel would clear the end of the lathe bed. You've guessed, it didn't clear the stepper motor which is now sticking out at that end. Fortunately, I noticed this before I power fed into it! Lifting even a fairly small milling machine on your own using levers and fulcras is not easy, but I've lifted it by 50mm and clearance is restored. I feel quite pharonic (google it). Next step is to make and fit one of Joe's rattle dampers, **ref. 5**, but that can wait. This should make it run faster (it's pretty quick now!)


So how long did this all take me?

From starting to finishing a very long time, but I kept on getting sidetracked onto other things, and even when I got the electronics wired up and double checked I got into a funk about powering it up. Eventually I just told myself not to be silly and plugged it in. No magic smoke, and after sorting out the push button issue above and reading the instructions again it works, just like that. If I had got all the bits together before starting, I could have done it in a couple of weeks, less if using switch mode power supplies. This has been immensely satisfying and makes a change from making little puffers. Why not have a go? You don't need to understand how it works, and you certainly don't need to understand the software, just follow the schematics, check, check and check again and it works, magic.

Finally thanks once again to Joe for sharing his design and putting up with my endless emails. ■

References

1. Spindle encoder E6B2-CW26C
2. Stepper motor controller DM8601
3. Stepper motor NEMA34 HJ1456B 8.4 Nm
4. Taper lock type bush RS part# 7784950 or Trantorque 184CO112 (more expensive)
5. <https://www.model-engineer.co.uk/forums/memberpostings.asp?c=161611&p=11>, scroll down to 07/11/18

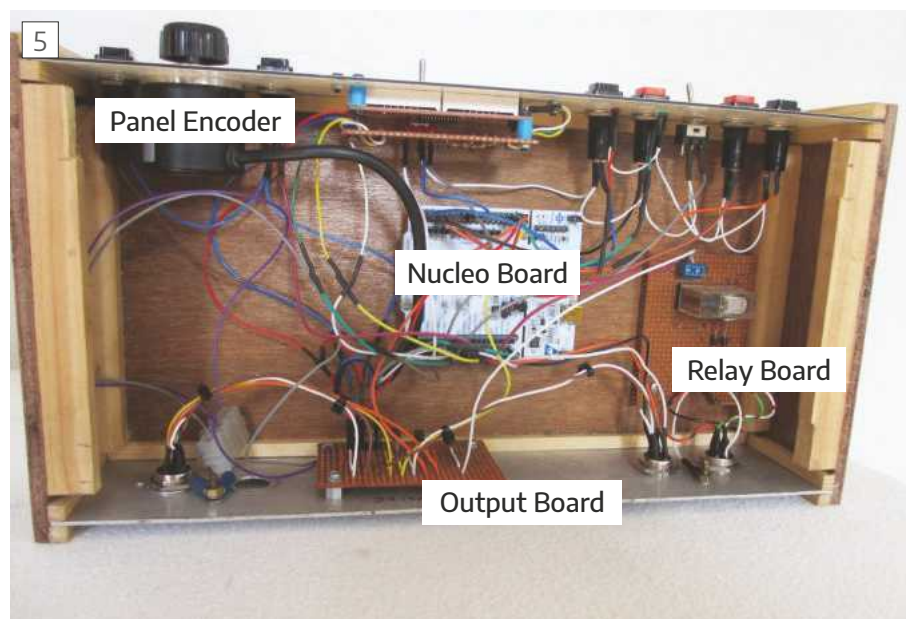

Inside control box.

Scribe a line

YOUR CHANCE TO TALK TO US!

Drop us a line and share your advice, questions and opinions with other readers.

Cutting Fluids

Dear Neil, the contribution from Peter King on the subject of cutting fluids which appeared in issue 304 reminded me of a batch machining saga back in the 90's. A specialist CNC firm had asked me to take on a job which was essentially a nuisance to them, putting grooves into M10 Allen screws. They also reported an unsatisfactory experience on tip life and wondered if I could get better results. The screws were held in a home brew collet shown in photo1 and the job run on a Herbert 2D capstan. This arrangement allowed the parts to be loaded and unloaded without stopping the spindle saving a significant amount of time over several thousand parts. Each groove required a special carbide tip ground to size at some cost. The two tools are illustrated in photo 2. The job was started with the machine as it had been previously set up with the coolant tank filled with white suds. After some experiments with feed and speed, the yield was about thirty parts per tip. The first change was to drain the machine and fill with a neat cutting oil, possibly BP Cilora. That gave a sizeable advantage, moving up to about 150 parts per tip. Thinking sideways, the real breakthrough came after a conversation with a local heat treatment specialist who was able to first anneal all of the Allen screws, then after machining, restore them to their correct specification. Machining the annealed screws raised the performance up to around 1500 parts per tip.



I would echo Peter's comments about mist cooling and add a further caveat concerning neat cutting oil. Again back in the 90's, I had another Herbert 2D stripped down to serve purely as a heavy duty "horizontal drilling machine". Parts to be drilled prior to tapping M10 or M12 were located in a capstan mounted fixture which allowed rapid loading/unloading of several hundred parts per hour. The coolant was the same neat oil, and when the machine was worked hard, a significant pall of blue smoke was generated over and around the machine. The quick and dirty answer was to set up a fan to blow fresh air at the operator.

For most model engineers, rapidity in machining is not of the essence, and the problem is unlikely to arise, however for those who do have a commercial interest, this is a safety issue worth keeping in mind.

Dave Fenner

Edge Finding

Dear Neil, I've enjoyed the articles on edge finders over recent months. I'm a little surprised however that traditional methods are not occasionally mentioned.

A method which has remained my one of choice was taught to me by the Metal Work Teacher at school in the early fifties even before my apprenticeship. Understandably he wouldn't let us do it ourselves until he thought we were capable.

The method is to wind the tool close to the work piece, then holding a cigarette paper (signs of the times) at one end, carefully offer the free end into the tool/workpiece gap. Then equally carefully, wind the tool towards the workpiece. The tool will eventually snatch the cigarette paper out of your hand. It will almost always shred the paper neatly along the cutting edges of the tool without even scarring the workpiece. Almost a guarantee of zero clearance. "Fag" papers are now a rarity but any thin paper will do e.g. newsprint. I seem to remember "Fag" papers were about 2 thou thick.

In this modern age H & S people will be horrified by it. All it needs however is care and confidence.

Jim Perry

Hi Jim, my approach is to stick half a 'blue Rizzla' to the work with spit, which avoids any risk of chewed up fingers. Blue are the thinnest grade and are about 1 thou thick. As a non-smoker one packet lasts me ages! - Neil.

Data Sheets

Dear Neil, I have just received April 2021 issue of Model Engineers Workshop and have seen a major mistake in the printing of this issue. The four centre pages are intended for the Model Engineers Workshop Data Book, however the tables for drill sizes and decimal sizes have only three correct pages as one page has been printed in double!!!

There is always a problem for overseas readers in as much that the given telephone numbers for contacting the magazine including the renewal operation has a UK telephone number which is not obtainable when calling from outside the UK.

For your information I have complete sets of both the Model Engineer and the Model Engineers Workshop, correctly bound from the first issues. I doubt there are not many readers who also have both complete sets, around the World.

Philip T. Bellamy, Switzerland.

Well spotted Philip, I am confounded as to how the repeat arose, as the submitted copy for that page had two different tables side by side. We will print the missing page as soon as we can without spoiling the ongoing sequence.

The 0344 243 9023 number is a special non-geographic rate for UK readers so it costs no more than 01 or 02 calls, wherever they live or if they call on a mobile phone. The 'rest of the world' number printed below it, +44 1604 828 748 will take you through to the same call centre. - Neil.

On the Wire

NEWS from the World of Hobby Engineering

THE MIDLANDS MODEL ENGINEERING EXHIBITION

Thursday 14th to Sunday 17th October 2021 at Warwickshire Event Centre

Meridienne Exhibitions have confirmed their intention to deliver the Midlands Model Engineering Exhibition this October.

They will continue to monitor and act on advice from the Government and respond accordingly to guidance throughout the coming months, to ensure the event can safely be delivered with compliance to any Covid-19 requirements that may be in place at that time.

Tickets are expected to go on sale in late July. Make a note in the diary now of the dates and see www.midlandsmodelengineering.co.uk for all the latest information.

The exhibition showcases hundreds of models from societies and individuals for visitors to enjoy along with a wide range of outside attractions, workshops and lectures as well as all the leading suppliers. The event attracts thousands of visitors and is supported by around 50 specialist suppliers with displays by over 40 clubs and societies. With upwards of 1,000 superb models on display.

Why not be part of the show and enter your work in the 32 competition and display classes? Cash prizes and trophies will be awarded to the best entries. Entry forms are available on the website.

STOP PRESS: Meridienne Exhibitions have also announced that the **International Model Boat Show**, one of the UK's Leading Marine Modelling Exhibitions will take place on **Saturday 6th & Sunday 7th November 2021** at Warwickshire Event Centre. See www.modelboatshow.co.uk for all the latest information.


Tool and Cutter Grinding by Dr Marcus Bowman

The Crowood Press have just announced the latest addition to their metalworking guides range. Dr Marcus Bowman has been a lifelong maker of models, clocks, and workshop accessories, in a wide range of materials, and he enjoys using both hand and machine tools. This is his fifth Crowood Metalworking Guide.

The cutting edges on engineering tools must lie at precise angles to ensure effective cutting, and sharpening must recreate the original geometry of each tool. This book provides an understanding of what is involved in sharpening typical lathe, milling, drilling and threading tools. With over 550 photographs and illustrations, Marcus' new book covers sharpening techniques for the most used engineering tools, screwdrivers and gravers, lathe, milling, reaming, drilling and threading cutters.

Containing a wealth of information including guidance on making useful accessories, this book covers the ground we felt was missing from his earlier book on sharpening workshop tools. Clearly the two volumes are meant to complement each other though we suspect this second volume will prove the most useful in the engineering-focused workshop.

260 x 215mm, 144 pages, ISBN 9781785008603, Hardback £16.99, visit www.crowood.com for more details.

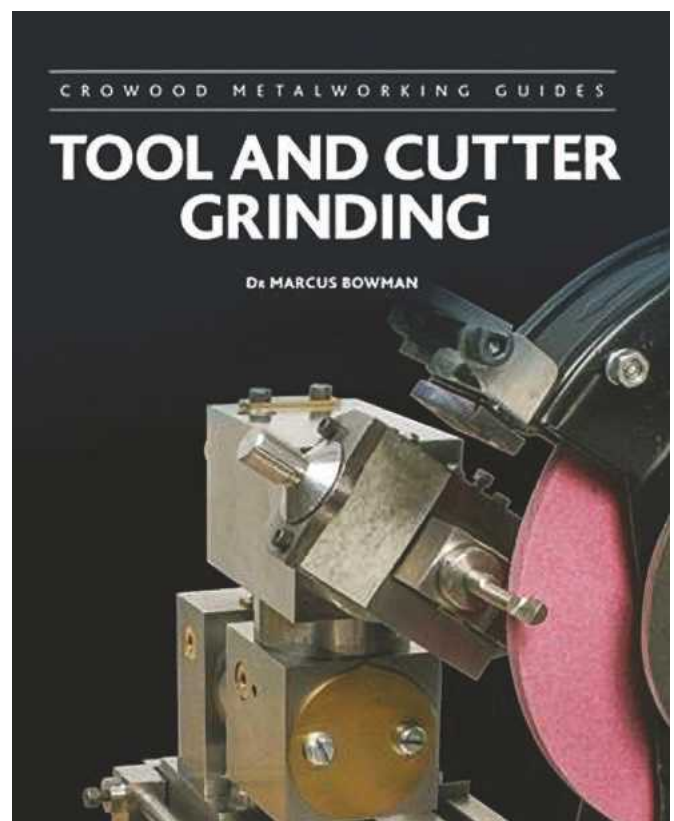

Theasby's Wrinkles

Eyebolts for a Hinge

Geoff Theasby creates stowable storage for a power hacksaw

Some time ago I bought a power hacksaw, which may be home-made, it is fairly basic. Not having space in my tiny workshop, I hinged it to hang from the front of my workbench, near the drill press, where it is not in the way. However, the sheer inconvenience and contortions required to fasten the hinges from below whilst Deborah supported the weight, meant small hinges and screws had to be used, since large hinges and screws were too big to fit easily. The little hinges were too small and kept bending, risking collapse.

After considerable cogitation, I hit upon the solution. In my local, old-fashioned ironmongers, I found eyebolts, some threaded M6, and some with wood screw threads. Fitting the latter into the edge of the wooden bench and the eyebolts into the wooden saw base, spaced appropriately, the saw could be offered up, eye-to-eye, so to speak, helped by my glamorous assistant, and either a bar slid through both, or two M8 bolts inserted and nutted up. Rather



Bench and hacksaw in place.

than support the free end with a prop, risking inadvertent trips, I screwed more eyebolts into a ceiling joist and the base, which was then held up by polypropylene rope (for radio aerial mast support guys) of a suitable length for it

to sit level. A box containing a suitable switch is to be fitted. This will be a No-Volt Release, but if the power goes off I'll be in the dark, and can't work anyway, so the risk of being caught by it starting unexpectedly is minimal. ■

NEWTON TESLA**SMOOTH, QUIET, HIGH PERFORMANCE VARIABLE SPEED
CONTROL FOR LATHES AND MILLING MACHINES****Supplier to industry since 1987 of high power speed control systems from 100W to 2,200,000W,****MITSUBISHI INVERTERS from £122 inc VAT****HIGH PERFORMANCE INVERTERS**

For serious machining duty.
240V 1-phase input, 220V 3-phase output, for you to run a dual voltage (Delta wired) three phase motor off your 1-phase supply.
Six sizes from 0.1kW (0.12hp) to 2.2kW(3hp).
Built-in user keypad, display and Speed Dial.
Unique Integrated Emergency Stop Function.
Advanced Torque Vector control for optimum performance. High Reliability.

Fully CE Marked and RoSH Compliant.
Compatible with our Remote Control station Pendants.
Supplied pre-programmed at no extra cost.

REMOTE CONTROL STATIONS from £66 inc VAT

Remote control station Pendants suitable for use with all our Mitsubishi Electric and IMO iDrive Inverters. Industrial grade push buttons and controls. Featuring START, STOP, FORWARD, REVERSE, RUN/JOG, & Variable Speed potentiometer. 3-wire control - Behaves like a No-Volt-Release. Beware of low quality copies of our original tried and tested controls.

Fitted with 2-metre length of control cable ready for connection to drive, and supplied with wiring diagram.

**VARIABLE SPEED CONTROL PACKAGES****The 'original' & best lathe speed control system.**

Pre-wired systems, and Inverter, Motor, Remote packages available to suit wide a range of metal and wood turning lathes, including; **MYFORD ML7**, Super 7, **BOXFORD**, & **RAGLAN** lathes, Wood turning lathes including; ML8 and MYSTRO and **UNION GRADUATE**. Pre-wired ready to go! Power Range: 1/2hp, 1hp, 2hp and 3hp. Super smooth control across entire speed range, giving chatter free machining and excellent finish unattainable with 1PH motors! Powered from domestic 240V Single Phase mains supply. Made in the UK, ISO9001:2008 Quality Assured.



**Our Pre-wired Lathe Speed
Controllers are now covered by a
10-Year Warranty**

Newton Tesla (Electric Drives) Ltd,
Warrington Business Park, Long Lane, Warrington,
Cheshire WA2 8TX, Tel: 01925 444773 Fax: 01925 241477
E-mail: info@newton-tesla.com
Visit www.lathespeedcontrol.com for more information.



THE MULTI METALS SHOP

The Multi Metals Shop, all your metal requirements in one place, we have over 3000 items in stock ready for quick dispatch, with FREE delivery on all orders.

Check out our webshop www.themultimetalsshop.co.uk

Alternatively call us on **01143493625** or email sales@themultimetalsshop.co.uk
Unit 7 Newhall Industrial Estate, Sanderson Street, S9 2TW


Amazing Savings!

6 issues for £10

On a quarterly DD stepping up to
£15.25 thereafter

3 issues for £10

On a quarterly DD stepping up to
£11.25 thereafter

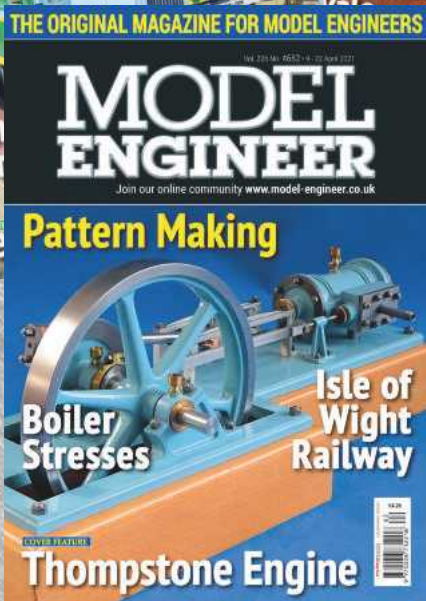

SUBSCRIBE SECURELY ONLINE:
WWW.MYTIMEMEDIA.CO.UK/KELSEY21
CALL **0344 243 9023**** AND QUOTE **KELSEY21**

TERMS & CONDITIONS: Offer ends 30/05/2021. *UK print subscriptions offer only. Subscriptions will begin with the next available issue. MyTime Media collects your data so that we can fulfil your subscription. We may also, from time to time, send you details of MyTime Media offers, events and competitions but you always have a choice and can opt out by emailing us at unsubscribe@mytimemedia.com. We do not share or sell your data with/to third parties. Details you share with us will be managed as outlined in our Privacy Policy here <http://www.mytimemedia.co.uk/privacy-policy>. Please visit www.mytimemedia.co.uk/terms for full terms & conditions.

A Digital Readout for a Myford Series 7 Lathe



Jacques Van Damme uses wire encoders instead of digital scales

Many of us dream of a digital readout for our metal lathe. Such a 'DRO' allows the turning tool to be put back on exactly the same spot, which offers a solution for errors due to the backlash that is always present on the screw shafts with which the cross slide is driven. Something like this, **photo 2**, especially helps in making screw threads. The great interest in this attachment is evidenced by the many videos on YouTube, the contributions on Model Engineering websites and in



Wire encoder.

many forum discussions.

However, the high cost is a deterrent. And not only that; attaching linear scales to a small lathe is quite a challenge. They take up too much space. This is not so bad for the X-axis, because there is usually some space available at the rear of the lathe, but on the Y-axis, the cross slide, that is a disaster. Additionally, this scale can cover access to the cross-slide T-slots and hides the cross table set screws. Mounting a reversed parting tool at the rear of the workpiece, such as I like to do, or pulling the turning tool across the lathe bed with the help of a taper turning attachment mounted behind the lathe bed, is then impossible. The available working space between the centers of the lathe is also shortened by the width of the guard above the ruler. Nobody likes to drill some holes in the machine. That must be kept to an absolute minimum.

An extensive industry has emerged for selling DROs, with even specific packages to supply a particular brand of lathe with a DRO. For my own Myford from the 7 series, this takes soon around 450 to 700 British pounds, not including shipping costs, and maybe also customs fees as I'm living in Belgium. Then you have to put the whole thing together, usually drill some holes in the machine and then your lathe with hooks, brackets, cables, cover plates and a swing arm, looks like a monstrosity of a mad scientist.



Myford ML7, toolholder removed to show setup.



Wire encoder with readout.



Angle bracket at the rear of the bed for X-axis setup. I also sprayed it with a spray can in machine green.

I thought this could be better. So, I was inspired by David Haythornethwaite's article "Digital readouts on the smaller lathe", ref. 1. He used wire encoders by a British company, called BW Electronics, instead of linear scales. He is delighted with the accuracy of these wire sensors and the space saving on his Myford. But this set also costs around 400 British pounds. And the screen of the readout is quite small. It is placed on the wall behind the lathe or on the splashguard, which is not very convenient if you wish to operate the push buttons there. Maybe



A screw hole is already provided on the underside of the cross table.



Both readouts in a Velleman project box.



The wire encoder cable ends in colored wires, with a braided shielded.



Connections to the display.

it is even a bit dangerous, you have to bend over for it. He spent much attention to the guarding of the measuring wire by fitting a telescopic casing around it to protect from chips and cutting oil. I think it is necessary to protect scales from chips and cutting oil as the moving parts are right next to the cross table. But a wire? There is a plastic film around and what

moves is a long way behind the cross table in a down closed reel.

According to our many ministers in Belgium (we have 47), in order to combat corona's economic crisis, we must now mainly buy in our own country, and we should also generously spend our savings. But in my own country I have not been able to find any

'wire encoder'. Yes, in China, they can be found in abundance. I have been careful and started ordering only one. After some sorting out data and comparing the different offers, I went for of a combination of the wire encoder CALT CESI-S800 with a digital readout CALT HB961. With a cable length of 80 cm, this encoder was more than long enough

Fig.1 Connection data

CALT CESI-S800 wire encoder

Signal	A	B	Z	A-	B-	Z-	Vcc	GND
Color	Green	White	Yellow	Brown	Gray	Orange	Red	Black

CALT HB961 digital readout

Connect	1	2	3	4	5	6	7	8	9	10
with	24V DC	24V DC	13	14	15	16	17	18	19	20

1 = 24 V to USB output

1 = 24 V to DC - DC print and adjust at 11 V DC


2 = 5 V to Touch DRO print

3 = 30mA, not used

4, 5, 6 and 7 = 0 V to Touch DRO print, to USB output and to cable shield

16 = J2 = relay to 15 or 17, normally connected with 15

19 = J1 = relay to 18 or 20, normally connected with 18

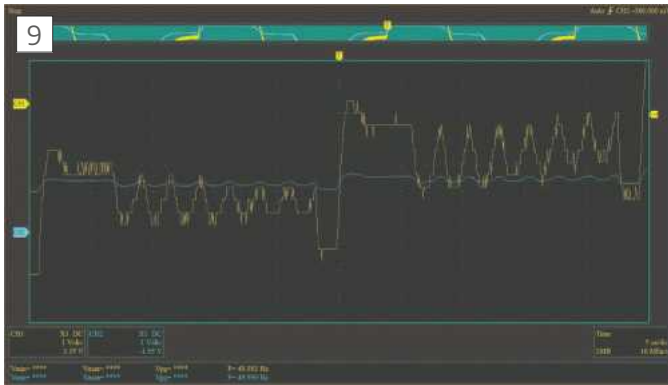

Signals on the oscilloscope, the pulses are around 15 KHz.



Front Y-axis mount.

for the X-axis, **photo 3**.

The mount of the X-measuring cable behind the bed of the lathe was a piece of cake. A Myford already has some tapped holes in a line, 4 inches apart. I folded a copper strip in the shape of an L and screwed it on the last two screw holes, **photo 4**.

The cross table has already a screw hole down at the rear, **photo 5**. I put a short screw in it and hooked a loop around it for the end of the wire encoder. A paper clip was most convenient to form the loop. The paperclip can be a bit wide and has been soldered closed so that no stretch or play is possible.

The decoder was connected to the readout and the readout was placed in a project box at the front of the Myford cabinet, **photo 6**.

These wire encoders operate according to the RS422 standard, the same standard as the conventional glass-and magnetic DRO digital scales which are abundant in the trade. These are connected accordingly, **photos 7 and 8, fig. 1**.

Without any programming, the readout works like a charm, you can also enter a zero point and two relay outputs are provided. Other types of readout can be set with the push buttons. You have to wait a while after switching on the power because the system will set itself



The Y-axis wire encoder with paper clip. The tool holder is removed for clarity.

up first. I have not yet been able to come up with an application for both relays.

Out of curiosity, I looked at the signal on the oscilloscope and it looks like this: the yellow blocks on channel 1 come out of B and the green line on channel 2 originates from A, **photo 9**.

The signals B- and A- are exactly the same but reversed. They are not used.

Encouraged by this result, I then ordered a second set for the Y-axis.

There the setup of the wire encoder is a bit more complicated. First a hook has to be made for the wire, again with a paper clip. To do this, a hole must be drilled in the cross table, 1 cm from the cross slide on the right and at the very front. The hole is tapped M4 so a screw can be fitted, **photos 10 and 11**.

The wire spool should be placed some way behind the cross table so that it does not get in the way of any taper turning attachment or parting tool holder. This requires a bracket. The bracket must be able to be secured to the rear end of the cross carriage and must be thin enough at the bottom so as not to bump against the table when moving the cross slide forward over the cross table, **photos 12 to 14**.

Two more holes are needed in the rear face of the cross slide and I tapped them M4. The bracket has become 21 cm long and was milled at the bottom over 8 cm with a dovetail cutter so that the bracket can slide smoothly over the cross table. I made the bracket from OBO wood (appears to be like MDF – Ed.) but it could equally well be made from Ertalon or aluminum, as long as the material is strong enough for wire tapping. On the tail of the bracket is a wide notch for the reel of the wire encoder, which is held by two M4 bolts. On adjusting the reel up or down in the notch, the wire can be run perfectly horizontal, nicely parallel to the carriage.



The bracket for the Y-axis. I sprayed the OBO wood with a paint can of silver.



Back of the bracket. Drilled two more holes in it and tapped M8, can always come in handy to attach something to it.



Bottom of the bracket. Mark the two holes to screw the bracket to the cross slide. Their position must be accurate. The trench is made on both sides with a dovetail cutter. ➤



The wire will leave the T-slots open and the set screws accessible.

The wire allows the T-slots of the cross table open and does not hinder the adjustment screws of the cross table. The workspace between the centers of the lathe is thus only shortened by 1 cm, **photos 15 and 16**.

In conclusion, the use of wire encoders offers clear advantages. It is cheaper, it works amazingly accurately, it is less unwieldy and does not compromise the functionality of the machine. Only limited surgery on the lathe itself is required: three holes need to be drilled and M4 tapped. Any modeler who can make a locomotive or a steam engine must be able to do this, even if the cross slide has to be removed temporarily to drill two holes in it. It was additionally fun to invent and create.

But I saw even more possibilities. I wanted to check whether this setup can also be expanded with TouchDRO, ref. 2, so that the readout could appear wirelessly over Bluetooth on the screen of an Android tablet and the advantages of this free software could be used. I had already left enough space in the project box to provide the TouchDRO circuit board and an USB connection for a tablet, and I ordered a TouchDRO PCB from Uncle Sam.

It took a long time, almost a month, but finally the PCB arrived from the States.

I had pre-loaded and viewed the TouchDRO app, which can be downloaded for free from Google Play, on an Android tablet. It is of course also possible on a smartphone that has




Even taper turning is possible without hindrance.



Bluetooth.



TouchDRO, the touch screen.

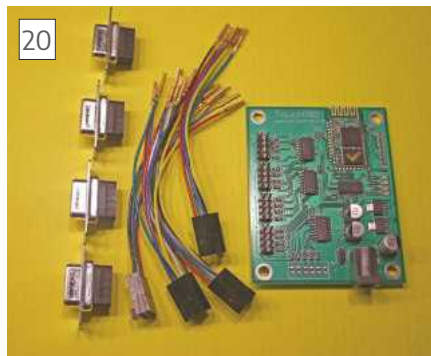

TouchDRO PCB.

Android as its operating system. Android has the advantage that screen touch can be used, which makes operation very easy, **photo 19**.

It is amazing what you can do with TouchDRO. Take a look at this YouTube video: ref. 4.



Wire encoder.

Just touch and you set the zero point, or you go from mm to inch, or you switch from absolute to incremental values, and much, much more. Unbelievable right? And all that for free too.

You can find everything about TouchDRO at ref. 5 and there is also a forum at ref. 6. Don't worry, you should not need this forum if you follow my explanation, and you don't have to program anything.

The PCB that you need to be on our wire encoders is the "Wireless DRO adapter for glass/magnetic scales" from the TouchDRO 'store'. When our Belgian post delivers it at the front door, they will add import duties and VAT on top of the cost. I presume, in UK there will be something similar.

Here is how it comes out of the package, **photo 20**.

You do not need the supplied DB9 connectors. You do need two of the four cable bundles, one for the X-axis and one for the Y-axis.

If you look down on the PCB, you will see the connection for both axes indicated with 'X' and 'Y'.


Fig. 2

Our wire encoders work according to the RS422 standard. The drawing shows the signals connected to reversed A and reversed B, but it is of course equally possible with signals A and B. Reversing the pulse train will only require touching a button on the TouchDRO screen.


This PCB requires 7 to 12 V power. You can take it from point 1 (24 V) and from point 4, 5, 6, or 7 (0 V) of the readout and lead it to a DC-DC adjustable 'step-down' regulator. In **photo 21**, the different connection for the readout are listed on the white stickers.

Why have a DC - DC adjustable 'step down' regulator placed between the display and the board? From the TouchDRO forum, it became clear to me that the TouchDRO requires a very stable power supply between 7 and 12 V. Hence, I adjusted the regulator to 10.4 V, **photo 22**.


From point 1 (24 V) and from points 4, 5, 6, or 7 (0 V) I also derived power

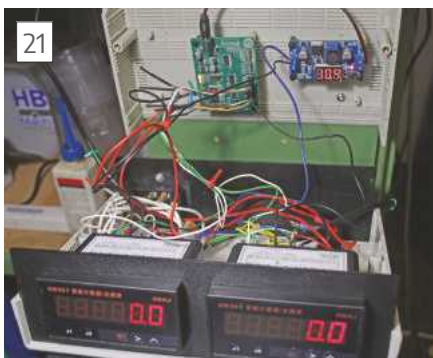


TouchDRO and DC - DC step down are located in the back of the opened project box.

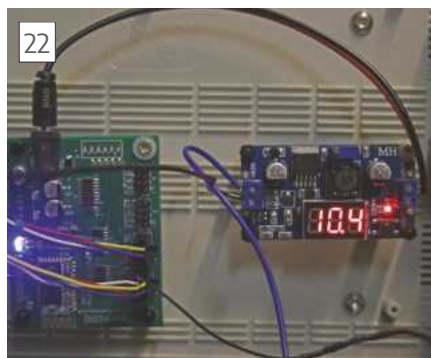

TouchDRO and DC - DC step down in operation. Various points are flickering.

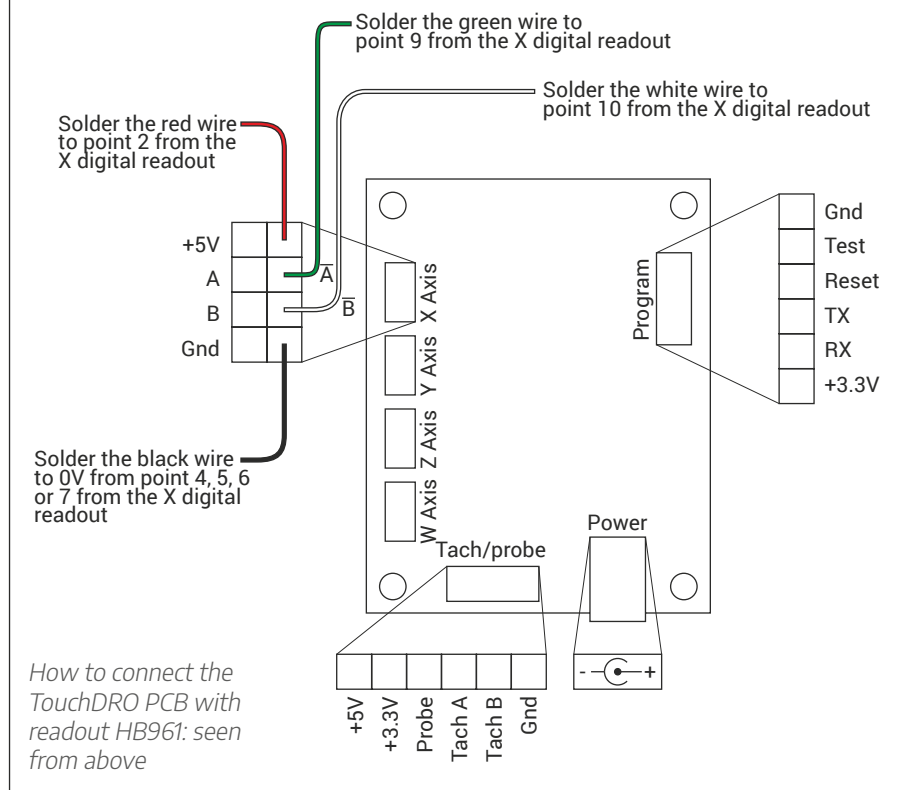

USB panel output.

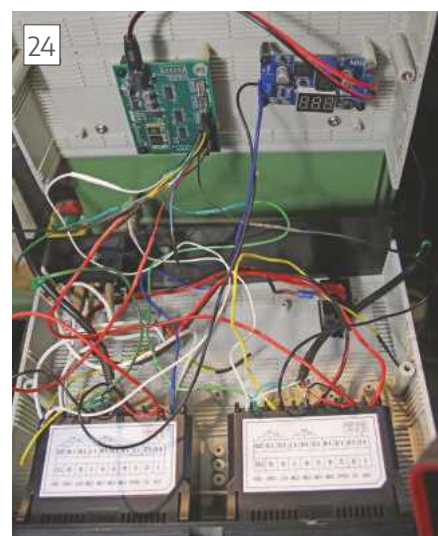

TouchDRO, DC-DC step down and both readouts connected in the opened project box.

for an USB output. For that I mounted a 24 V panel output and fitted it on the Velleman project box. This will come in handy later to provide the tablet or smartphone with power and to be able to charge it, **photo 23**.

I used a 500mA fuse, that is sufficient for normal use. If the tablet is also being charged via the panel output, a fuse of approximately 2 A will be needed. I once measured the current on loading the tablet; when switching on, it shows a short peak of 1.3 A and then falls to 460mA, **photo 24**.

And then, the moment of truth, once all connections in the project box are completed, it finally can be switched on. The PCB produces a series of colorful lights, the blue light flickers.

Now also the tablet can be switched on and the wireless Bluetooth connection still has to be established. In the settings of the tablet: click on 'Bluetooth'. Then a list of Bluetooth devices will appear which the tablet can find nearby. Search device 'HC - 05'. Click here. If you now click 'connect' a code will be requested. The code is '1234'.

You can leave the 'settings'. Click the TouchDRO logo. Click on 'Connect' at the top right. "DRO - Connected" appears above on the left. Good luck! **Photo 25**.

Get started! TouchDRO starts immediately, faster than the readings on your project box. On the menu you can adjust the machine settings and perform a calibration. You can lay down the tablet on a desk or place it on a firm gooseneck to have the operation at

hand, **photo 26**.

Conclusions

TouchDRO works not only with digital scales but also with wire encoders. It works quickly and precisely and can be read wireless from a Myford lathe on the screen of a tablet or a smartphone.

You can make a full digital readout for a 'small' lathe yourself for a fraction of the cost of an 'industrial' unit. The DIY construction is also less unwieldy, is much less traumatic for the machine and does not impose any restrictions on the functions of your lathe.

This article appeared in Dutch on the local ME website (Antwerp), ref. 7. Thanks for their permission to publish it in MEW.

References:


1. www.haythornthwaite.com/DRO%20For%20The%20Smaller%20Lathe.pdf.
2. www.touchdro.com/
3. www.kmyca.be/wp-content/uploads/2020/07/Digitale-uitlezing-voor-myford-draibank-met-meetkabels.pdf



The reading can be followed on the tablet.



Project box closed, with digital readouts, and tablet on top of a gooseneck

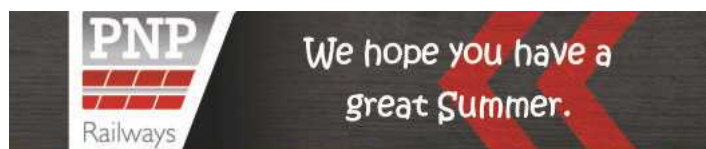

**Precision Made Parts for the
Model, Miniature and Garden Railway Engineer.
Friendly Expert Advice. Speedy Delivery.**

01453 833388 shop@pnp-railways.co.uk

www.pnp-railways.co.uk



MADE IN
THE UK



WORLDWIDE
DELIVERY

Follow us on:



Hand powered metalforming tools
Handy for so many jobs

Punching

Cutting

Riveting

Bending

Rolling

Scrolling

Twisting

Also suppliers of
a wide range of
steel, fixings,
clock components
& much more.

Call today for your free catalogue and if you
quote our promo code* MMENGW21, we will
send you our demonstration DVD free of charge.

J & C R Wood Ltd, Dept MMENGW21, 66 Clough Road, HULL HU5 1SR
Tel: 01482 345067 Email: info@janderwood.co.uk
OR Visit our on-line store at
www.metal-craft.co.uk

Engineers' Cabinets

Tel 07534 458664 or email mark@cassey.co.uk

- * Brand new and Hand made in the UK (Lincolnshire)
- * Solid English Oak locally sourced (no veneers)
- * Grain of oak "wraps" around the cabinet (i.e. a single board is used for the carcass, where the start of the new side has a continuation of grain pattern from that of the previous side).
- * Drawer fronts are all from a single board, so the grain pattern "flows" across the front of all drawers
- * Made to exacting standards
- * Fashioned on the iconic Moore & Wright cabinet
- * Size 17" x 8.25" x 11.375" (430x210x290mm) approx
- * Bespoke commission undertaken to your dimensions

I currently make two styles, a 5 full width drawer cabinet for £550.00 and a 7 drawer cabinet at £600. Delivery at cost or collection welcomed. Cost of bespoke cabinets depending on size and details.



David Piddington

I must pass on the sad news that David Piddington passed away at the end of April. A well-known figure in the model engineering field, David was a contributor to Model Engineers' Workshop. He was a kind and gentle man, and I had the pleasure of meeting him and Mary, his wife, and seeing his beautifully organised workshop. My thanks to Chris Deith and Geoff Stait for the following obituary:

David was an extremely skilled modeller and was employed by A.J. Reeves for very many years until the company's change of ownership and move from Marston Green. At Reeves David was responsible for drafting some of the designs and produced many patterns for castings. To customers he was best known as their technical adviser answering the vast majority of the queries that came into the company and he kept meticulous records of customers who had purchased sets of drawings of many of the designs he had been involved with. After leaving AJ Reeves he went to work with the late John Barrett at Barratts Steam Models Ltd and remained with them until his retirement.

David was a lifelong member of the Birmingham Society of Model Engineers and did a significant amount of work in sorting and cataloguing the society's extensive library of books and drawings etc. and took a great deal of pride in the finished catalogue which was distributed to all the members.

In addition to his involvement in the design and drafting at Reeves and his committed involvement with the Birmingham Society he was also a prolific author producing a wide range of workshop tools and accessories and stationary engine designs for publication in the model engineering press over many years. In addition to writing under his own name he wrote under the pseudonym A J Yallup and occasionally as Stuart Rome. Perhaps his best-known model was the stationary steam engine 'Monarch' and its derivatives and fittings.

Such was his interest in the model stationary engine in 1992 he joined the judging panel of the Midlands Model Engineering Exhibition and remained a member of the judging team until ill-health prevented him continuing some 24 years later. He thoroughly enjoyed his involvement with the



David Piddington

exhibition and could often be seen most days at the exhibition stewarding and discussing model engineering with all, the exhibition was regarded as a holiday! Although suffering from increasing ill health which obliged him to give up his licence he still managed, through the good offices of friends, to visit the exhibition for a couple of further years after giving up judging and stewarding.

Outside of model engineering his chosen form of transport was a motorcycle and as a devout Christian he was a member of the Christian Motorcyclists Association. Unfortunately he suffered with Parkinson's disease which obliged him first to give up his much loved motorcycling which he deeply regretted.

David was a very modest man who did not enjoy being in the limelight and in his passing the hobby has lost a dedicated and highly knowledgeable modeller and author.

He leaves a wife Mary and a daughter Miriam and we extend our deepest condolences to them both. ■



David's Table-length Milling Vice was serialised starting in MEW 230.


BEGINNERS WORKSHOP

These articles by Geometer (Ian Bradley) were written about half a century ago. While they contain much good advice, they also contain references to things that are out of date or describe practices or materials that we would not use today either because much better ways are available or for safety reasons. These articles are offered for their historic interest and because they may inspire more modern approaches as well as reminding us how our hobby was practiced in the past.

Sharpening drills and tools

In order to ensure complete accuracy in the workshop, it is essential for drills and other tools to be sharp. Details of the correct methods of sharpening these tools' are given

By GEOMETER

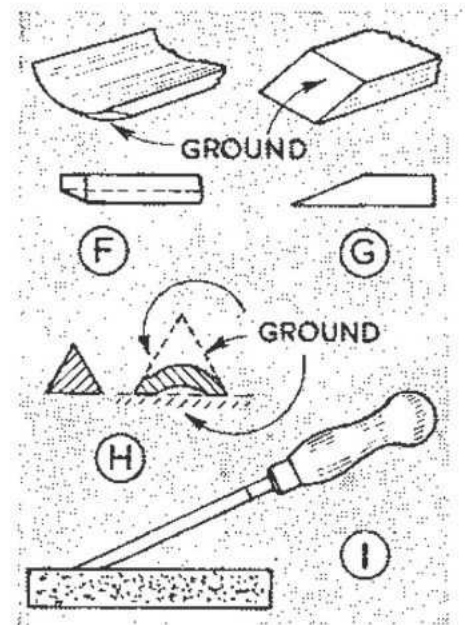

M AINTAINING. DRILLS, Centre punches, chisels, scrapers, etc., keen and accurate is one, at least, of the secrets of producing good work. It involves the use of grinding, wheel, hand-hones and oil-stone.

Hand hones are small abrasive slips obtainable in various shapes and sizes, for finishing tools to a fine edge after grinding. They are usually rubbed on tools. The oil stone, (a larger abrasive block), rests on the bench while tools are applied for finishing.

Thin oil, such as cycle oil, should be used on an oil stone to float particles of metal away; hand hones may also be fed with thin oil and both types, when dirty and clogged, can be scrubbed in paraffin. As with grinding wheels, the area of working should not be restricted for the hone or stone to become locally worn.

For work on the grinder, whether or not preliminary, it is desirable for the drive to the wheel to be by power or foot treadle, leaving both hands free for the tool.

Drill sharpening

For most work, twist drills have an included angle of 118 deg. and a clearance from each cutting edge of about 12 deg. The cutting edges or lips are straight and equal as seen in plan and clearance is curved on large drills, though it can be in the form of a flat on very small drills.

The angles, while desirable, are not rigid in that a drill would not cut if ground otherwise. In practice, slight variations occur and even where a jig is available for maintaining accurate angles, free-hand grinding is often preferred.

In sharpening a drill, it is applied to the face or the periphery of the wheel, horizontally and at the appropriate angle *A*, with the cutting edge horizontal. Care is observed that the cutting edges *X*, *Y*, are maintained as nearly as possible the same. Holding the drill as at *A* in contact with the running wheel, the nose is then lifted as at *B*, thus providing the clearance as at *C*.

A small drill can be applied twice to the grinding wheel at an angle

producing a flat for clearance at each cutting edge. On a very tiny drill the flats can be produced rubbing on an oil-stone, or hand-honing with the drill in parallel-jaw pliers.

Punches and chisels


A centre punch with an angle of 60 deg., *D*, is sharpened by applying to the periphery or face of the wheel, twisting between fingers. Direction of twisting is not important, but the rate should be fast to avoid flats.

A tubular punch *E* for making holes in gaskets can be ground in a similar fashion. A chipped or ragged cutting edge, however, should first be squared on the face of the wheel. Afterwards the chamfer can be produced. Overheating can be avoided by dipping in water, and the chamfer hand-honed at the finish.

A gouge or half-round chisel *F* can be ground, not by twisting, but turning with wrist movements, firmly held and finally hand-honed.

With a normal wood chisel *G*, care is required to produce a true flat, a square cutting edge and not to over-heat. Frequent cooling is essential and a coarse wheel initially desirable. Badly damaged edges involve extensive grinding, without which cutting angles are changed and the edges becoming "dubbed off."

Triangular and hollow-ground scrapers *H* can be ground flat on the faces for sharpening, then hand-honed. A wood chisel, however, is better finished or maintained sharp on an oil stone *I*, rubbing at the appropriate angle, then passing the flat side of the blade along the stone to remove the feather edge.

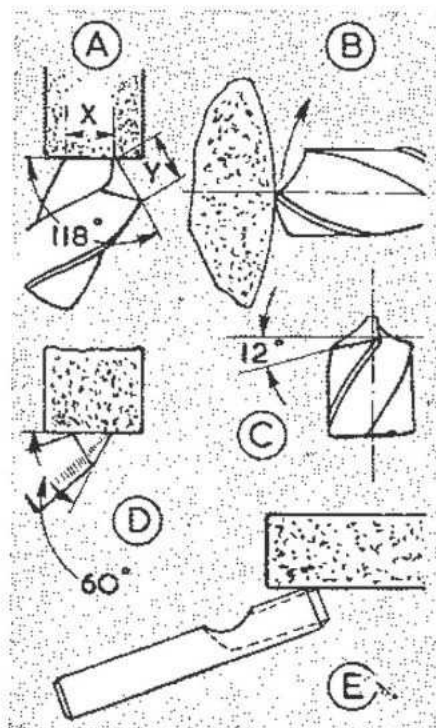

Model Engineers' Workshop Data Book

MODEL ENGINEERS' WORKSHOP DATA BOOK

MODEL ENGINEERS' WORKSHOP DATA BOOK

UNIFIED THREADS COARSE (UNC)											
SIZE	NO./	OUT	CORE	PIT	TAP	DEP	DIA.	DIA.	OUT	PITCH	CONVERSIONS
in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.
no.1	0.0730	0.054	64	1.55	62	0.061	0.060	1.85	0.40	1.56	1.51
no.2	0.0860	0.064	56	1.85	60	0.073	0.071	2.18	0.45	1.85	1.79
no.3	0.0990	0.073	48	2.10	64	0.084	0.081	2.51	0.53	2.13	2.06
no.4	0.1120	0.081	40	2.35	64	0.094	0.091	2.84	0.64	2.38	2.30
no.5	0.1250	0.094	40	2.65	67	0.107	0.104	3.17	0.64	2.71	2.63
no.6	0.1380	0.100	32	2.85	67	0.115	0.111	3.51	0.79	2.92	2.82
no.8	0.1640	0.126	32	3.50	68	0.141	0.137	4.17	0.79	3.58	3.48
no.10	0.1900	0.139	24	3.90	71	0.159	0.154	4.83	1.06	4.05	3.92
no.12	0.2160	0.165	24	4.50	76	0.185	0.180	5.49	1.06	4.71	4.58
1/4	0.2500	0.189	20	5.10	80	0.213	0.207	6.35	1.27	5.42	5.26
5/16	0.3125	0.244	18	6.60	77	0.272	0.265	7.94	1.41	6.90	6.73
3/8	0.3750	0.298	16	8.00	78	0.329	0.321	9.52	1.59	8.36	8.16
7/16	0.4375	0.350	14	9.40	77	0.385	0.376	11.11	1.81	9.78	9.55
1/2	0.5000	0.406	13	10.80	79	0.443	0.434	12.70	1.95	11.26	11.02
9/16	0.5625	0.460	12	12.20	80	0.501	0.491	14.29	2.12	12.73	12.47
5/8	0.6250	0.513	11	13.50	84	0.558	0.547	15.87	2.31	14.18	13.89
3/4	0.7500	0.627	10	16.50	82	0.676	0.664	19.05	2.54	17.18	16.87
7/8	0.8750	0.739	9	19.50	79	0.793	0.780	22.22	2.82	20.15	19.80
1	1.0000	0.847	8	22.50	74	0.908	0.893	25.40	3.17	23.06	22.67
1-1/8	1.1250	0.950	7	25.00	80	1.020	1.002	28.57	3.63	25.90	25.46
ISO METRIC THREADS SPARK PLUGS											
SIZE	OUT	CORE	PITCH	TAP	DEP	TH	DIA.	OUT	PITCH	CONVERSIONS	
mm	mm	mm	mm	mm	mm	%	mm	mm	mm	mm	mm
M10 X 1.0	10.0	8.77	1.00	9.20	65	9.26	9.14	0.394	25.40	0.365	0.360
M12 X 1.25	12.0	10.47	1.25	10.90	72	11.08	10.93	0.472	20.32	0.436	0.430
M14 X 1.25	14.0	12.47	1.25	12.90	72	13.08	12.93	0.551	20.32	0.515	0.509
M18 X 1.5	18.0	16.16	1.50	16.75	68	16.90	16.71	0.709	16.93	0.665	0.658
ISO METRIC THREADS CONDUIT											
SIZE	OUT	CORE	PITCH	TAP	DEP	TH	DIA.	OUT	PITCH	CONVERSION	
mm	mm	mm	mm	mm	mm	%	mm	mm	mm	mm	mm
M16 X 1.5	16.0	14.16	1.50	14.50	82	14.90	14.71	0.630	16.93	0.586	0.579
M20 X 1.5	20.0	18.16	1.50	18.50	82	18.90	18.71	0.787	16.93	0.744	0.737
M25 X 1.5	25.0	23.16	1.50	23.50	82	23.90	23.71	0.984	16.93	0.941	0.934
M32 X 1.5	32.0	30.16	1.50	30.50	82	30.90	30.71	1.260	16.93	1.216	1.209
M40 X 1.5	40.0	38.16	1.50	38.50	82	38.90	38.71	1.575	16.93	1.531	1.524

UNIFIED THREADS FINE (UNF)

SIZE NO./ in.	OUT DIA. in.	CORE DIA. in.	PIT CH TPI	TAP DRILL mm	DEP TH %	DIA. 60% in.	DIA. 70% in.	APPROX METRIC CONVERSIONS			
								OUT DIA. mm	PITCH mm	DIA. 60% mm	DIA. 70% mm
no.0	0.0600	0.045	80	1.30	58	0.051	0.049	1.52	0.32	1.29	1.25
no.1	0.0730	0.056	72	1.60	59	0.063	0.061	1.85	0.35	1.59	1.55
no.2	0.0860	0.067	64	1.90	58	0.074	0.073	2.18	0.40	1.89	1.84
no.3	0.0990	0.077	56	2.20	57	0.086	0.084	2.51	0.45	2.18	2.13
no.4	0.1120	0.086	48	2.45	61	0.097	0.094	2.84	0.53	2.46	2.39
no.5	0.1250	0.097	44	2.70	67	0.108	0.105	3.17	0.58	2.75	2.68
no.6	0.1380	0.107	40	3.00	65	0.120	0.117	3.51	0.64	3.04	2.96
no.8	0.1640	0.130	36	3.60	65	0.144	0.140	4.17	0.71	3.65	3.56
no.10	0.1900	0.152	32	4.20	64	0.167	0.163	4.83	0.79	4.24	4.14
no.12	0.2160	0.172	28	4.80	62	0.190	0.185	5.49	0.91	4.82	4.71
1/4	0.2500	0.206	28	5.60	67	0.224	0.219	6.35	0.91	5.68	5.57
5/16	0.3125	0.261	24	7.10	65	0.282	0.277	7.94	1.06	7.16	7.03
3/8	0.3750	0.324	24	8.60	71	0.344	0.339	9.52	1.06	8.75	8.62
7/16	0.4375	0.376	20	10.00	71	0.401	0.395	11.11	1.27	10.18	10.02
1/2	0.5000	0.439	20	11.60	71	0.463	0.457	12.70	1.27	11.77	11.61
9/16	0.5625	0.494	18	13.00	74	0.522	0.515	14.29	1.41	13.25	13.08
5/8	0.6250	0.557	18	14.50	79	0.584	0.577	15.87	1.41	14.84	14.66
3/4	0.7500	0.673	16	17.75	67	0.704	0.696	19.05	1.59	17.88	17.69
7/8	0.8750	0.787	14	20.75	66	0.822	0.814	22.22	1.81	20.89	20.67
1	1.0000	0.898	12	23.50	73	0.939	0.928	25.40	2.12	23.84	23.58

BRITISH ASSOCIATION THREADS (BA)

SIZE	OUT DIA. mm	CORE DIA. mm	PITCH mm	TAP DRILL mm	DEP TH %	DIA. 60% mm	DIA. 70% mm	APPROXIMATE INCH CONVERSIONS			
								OUT DIA. in.	PITCH TPI	DIA. 60% in.	DIA. 70% in.
0	6.00	4.80	1.00	5.20	67	5.28	5.16	0.236	25.40	0.208	0.203
1	5.30	4.22	0.90	4.60	65	4.65	4.54	0.209	28.22	0.183	0.179
2	4.70	3.73	0.81	4.00	72	4.12	4.02	0.185	31.36	0.162	0.158
3	4.10	3.22	0.73	3.50	68	3.57	3.49	0.161	34.79	0.141	0.137
4	3.60	2.81	0.66	3.10	63	3.12	3.05	0.142	38.48	0.123	0.120
5	3.20	2.49	0.59	2.75	64	2.78	2.70	0.126	43.05	0.109	0.106
6	2.80	2.16	0.53	2.40	63	2.42	2.35	0.110	47.92	0.095	0.093
7	2.50	1.92	0.48	2.10	69	2.15	2.10	0.098	52.92	0.085	0.083
8	2.20	1.68	0.43	1.85	68	1.89	1.84	0.087	59.07	0.074	0.072
9	1.90	1.43	0.39	1.60	64	1.62	1.57	0.075	65.13	0.064	0.062
10	1.70	1.28	0.35	1.45	60	1.45	1.41	0.067	72.57	0.057	0.055
11	1.50	1.13	0.31	1.25	67	1.28	1.24	0.059	81.94	0.050	0.049
12	1.30	0.96	0.28	1.10	60	1.10	1.06	0.051	90.71	0.043	0.042
13	1.20	0.90	0.25	1.00	67	1.02	0.99	0.047	101.60	0.040	0.039
14	1.00	0.72	0.23	0.82	65	0.83	0.81	0.039	110.43	0.033	0.032
15	0.90	0.65	0.21	0.75	60	0.75	0.72	0.035	120.95	0.029	0.028
16	0.79	0.56	0.19	0.65	61	0.65	0.63	0.031	133.68	0.026	0.025
17	0.70	0.50	0.17	0.58	59	0.58	0.56	0.028	149.41	0.023	0.022
18	0.62	0.44	0.15	0.50	67	0.51	0.49	0.024	169.33	0.020	0.019

MODEL ENGINEERS' WORKSHOP DATA BOOK

SIZE	OUT DIA.	CORE DIA.	PIT TAP	CH DRILL	TH	DEP	DIA.	DIA.	APPROX METRIC	CONVERSIONS
40 TPI SERIES	1/8	0.1250	0.093	40	2.65	65	0.106	0.137	3.17	2.61
	1/8	0.1562	0.124	40	3.40	70	0.137	0.134	3.97	3.40
	5/32	0.1875	0.155	40	4.20	69	0.168	0.165	4.76	4.19
	3/16	0.2188	0.187	40	5.00	68	0.200	0.196	5.56	4.99
	7/32	0.2500	0.218	40	5.80	68	0.231	0.228	6.35	5.78
	1/4	0.3125	0.280	40	7.30	78	0.293	0.290	7.94	7.37
	5/16	0.3750	0.343	40	8.90	77	0.356	0.353	9.52	8.96
32 TPI SERIES	1/4	0.2500	0.210	32	5.70	64	0.226	0.222	6.35	5.64
	1/4	0.2813	0.241	32	6.50	63	0.257	0.253	7.14	6.43
	5/16	0.3125	0.272	32	7.20	73	0.288	0.284	7.94	7.23
	3/8	0.3750	0.335	32	8.80	71	0.351	0.347	9.52	8.81
	7/16	0.4375	0.397	32	10.40	70	0.413	0.409	11.11	10.40
1/2	0.5000	0.460	0.420	32	12.00	69	0.476	0.472	12.70	11.99

MODEL ENGINEERS' WORKSHOP DATA BOOK

SIZE	OUT DIA.	CORE DIA.	PIT TAP	CH DRILL	TH	DEP	DIA.	DIA.	APPROX METRIC	CONVERSIONS
1/16	0.0625	0.041	60	1.25	62	0.050	0.048	1.59	0.42	1.21
3/32	0.0938	0.067	48	1.95	64	0.078	0.075	2.38	0.53	1.91
1/8	0.1250	0.093	40	2.65	65	0.106	0.103	3.17	0.64	2.61
5/32	0.1562	0.116	32	3.30	66	0.132	0.128	3.97	0.79	3.26
3/16	0.1875	0.134	24	3.90	64	0.155	0.150	4.76	1.06	3.81
7/32	0.2188	0.165	24	4.70	63	0.187	0.181	5.56	1.06	4.61
1/4	0.2500	0.186	20	5.30	65	0.212	0.205	6.35	1.27	5.21
5/16	0.3125	0.241	18	6.80	63	0.270	0.263	7.94	1.41	6.67
3/8	0.3750	0.295	16	8.10	70	0.327	0.319	9.52	1.59	8.10
7/16	0.4375	0.346	14	9.50	69	0.383	0.373	11.11	1.81	9.49
1/2	0.5000	0.393	12	10.80	70	0.436	0.425	12.70	2.12	10.80
9/16	0.5625	0.456	12	12.40	70	0.498	0.488	14.29	2.12	12.39
5/8	0.6250	0.509	11	13.70	74	0.555	0.544	15.87	2.31	13.80
11/16	0.6875	0.571	11	15.25	75	0.618	0.606	17.46	2.31	15.39
3/4	0.7500	0.622	10	16.75	71	0.673	0.660	19.05	2.54	16.77
13/16	0.8125	0.684	10	18.25	73	0.736	0.723	20.64	2.54	18.36
7/8	0.8750	0.733	9	19.50	75	0.790	0.775	22.22	2.82	19.69
15/16	0.9375	0.795	9	21.25	71	0.852	0.838	23.81	2.82	21.28
1	1.0000	0.840	8	22.50	71	0.904	0.888	25.40	3.17	22.55
1-1/8	1.1250	0.942	7	25.25	72	1.015	0.997	28.57	3.63	25.32

SIZE	OUT DIA.	CORE DIA.	PIT TAP	DEF TH	DIA. 60%	DIA. 70%	OUT DIA.	PITCH	mm	mm	mm	mm
3/16	0.1875	0.147	32	4.10	0.163	0.159	4.76	0.79	4.15	4.05	4.74	4.05
7/32	0.2188	0.173	28	4.80	0.191	0.187	5.56	0.91	4.86	5.47	4.74	4.05
1/4	0.2500	0.201	26	5.50	0.220	0.216	6.35	0.98	5.60	5.47	4.74	4.05
5/16	0.3125	0.254	22	6.90	0.278	0.272	7.94	1.15	7.05	6.90	5.47	4.05
3/8	0.3750	0.311	20	8.40	0.337	0.330	9.52	1.27	8.55	8.39	5.47	4.05
7/16	0.4375	0.366	18	9.90	0.395	0.388	11.11	1.41	10.03	9.85	5.47	4.05
1/2	0.5000	0.420	16	11.30	0.452	0.444	12.70	1.59	11.48	11.28	5.47	4.05
9/16	0.5625	0.482	16	12.90	0.514	0.506	14.29	1.59	13.07	12.86	5.47	4.05
5/8	0.6250	0.534	14	14.25	0.570	0.561	15.87	1.81	14.48	14.25	5.47	4.05
11/16	0.6875	0.596	14	15.75	0.633	0.623	17.46	1.81	16.07	15.84	5.47	4.05
3/4	0.7500	0.643	12	17.00	0.686	0.675	19.05	2.12	17.42	17.15	5.47	4.05
7/8	0.8750	0.759	11	20.00	0.805	0.794	22.22	2.31	20.45	20.15	5.47	4.05
1	1.0000	0.872	10	23.00	0.923	0.910	25.40	2.54	23.45	23.12	5.47	4.05
1-1/8	1.1250	0.983	9	25.75	1.040	1.025	28.57	2.82	26.41	26.04	5.47	4.05
1-1/4	1.2500	1.108	9	29.00	1.165	1.150	31.75	2.82	29.58	29.22	5.47	4.05

BRITISH STANDARD FINE THREADS (BSF) (WHITWORTH FORM)
APPROX METRIC CONVERSIONS

SIZE	OUT DIA.	CORE DIA.	PIT TAP	DEF TH	DIA. 60%	DIA. 70%	OUT DIA.	PITCH	mm	mm	mm	mm
1/4	0.2500	0.209	26	5.70	0.225	0.221	6.35	0.98	5.73	5.62	5.47	4.05
5/16	0.3125	0.272	26	7.30	0.288	0.284	7.94	0.98	7.31	7.21	5.47	4.05
3/8	0.3750	0.334	26	8.80	0.350	0.346	9.52	0.98	8.90	8.80	5.47	4.05
7/16	0.4375	0.397	26	10.40	0.413	0.409	11.11	0.98	10.49	10.38	5.47	4.05
1/2	0.5000	0.459	26	12.00	0.475	0.471	12.70	0.98	12.08	11.97	5.47	4.05
9/16	0.5625	0.522	26	13.60	0.538	0.534	14.29	0.98	13.66	13.56	5.47	4.05
5/8	0.6250	0.584	26	15.25	0.600	0.596	15.87	0.98	15.25	15.15	5.47	4.05
11/16	0.6875	0.647	26	16.75	0.663	0.659	17.46	0.98	16.84	16.73	5.47	4.05
3/4	0.7500	0.709	26	18.25	0.725	0.721	19.05	0.98	18.43	18.32	5.47	4.05
5/8	0.6250	0.576	26	15.00	0.595	0.591	15.87	0.98	15.12	15.00	5.47	4.05
3/4	0.7500	0.701	26	18.25	0.720	0.716	19.05	0.98	18.30	18.17	5.47	4.05
1/2	0.5000	0.451	26	11.80	0.470	0.466	12.70	0.98	11.95	11.82	5.47	4.05
7/16	0.4375	0.388	26	10.20	0.408	0.403	11.11	0.98	10.36	10.24	5.47	4.05
3/8	0.3750	0.326	26	8.70	0.345	0.341	9.52	0.98	8.77	8.65	5.47	4.05
5/16	0.3125	0.263	26	7.10	0.283	0.278	7.94	0.98	7.19	7.06	5.47	4.05
1/4	0.2500	0.201	26	5.50	0.220	0.216	6.35	0.98	5.60	5.47	5.47	4.05

BRITISH STANDARD BRASS THREAD 26 TPI (WHITWORTH FORM)
APPROX METRIC CONVERSIONS

Developing an Edge Finder



Roger Vane describes how he designed and developed an electronic edge finder, together with detailed drawings so that you can make your own - Part 4



Insulating sleeve and probe body blanks are now ready to be pressed together.



Fitting the probe blank to the insulating sleeve.

Machining the probe blanks is straightforward, with concentricity not a real issue as finish machining will take place after assembly to the main bodies. The probe blank for the ball-end needs to have a 3mm hole partly drilled and also the flat-bottomed recess for the spring. The 3mm hole should not be drilled all the way though to the end of the blank so as to avoid influencing the machining of the seat due to any slight eccentricity.

Photograph 38 shows the insulating sleeves and probe blanks prior to fitting and final machining.

We can now fit the probe blanks into the insulating sleeves using the lathe as a press, **photo 39**. Hold the stem in the tailstock and smaller bore end of insulating sleeve against tailstock jaws, with the jaws just open wide enough to accommodate 0.310" diameter.

Next, face the sleeve and probe blank at the 'outer' end to be flush with each other. At the 'inner' end ensure that the probe blank protrudes from the insulating sleeve, allowing around 0.010" protrusion so that the end of cartridge clears insulation to make good contact with the probe.

The assemblies can now be turned



The two part-finished probe units.

down to provide the for interference fit in the body, with around 0.001" about right. **Photograph 40** shows the two probe blanks fitted to their insulating sleeves - note the protrusion of the boss through the insulating sleeve.


Next, press fit the probes into the main body, **photo 41**, again using the lathe as a press. Here, it is advisable to use a collet to hold the main body to avoid distorting what is a fairly thin-walled tube. The tailstock chuck jaws should bear upon the steel as well as the plastic to ensure that the probe is pushed fully home without damage -

the reason for facing the outer end of the probe and insulating sleeve now becomes apparent.

The bodies, complete with probes are shown in **photo 42** - note the slight protrusion of the insulating sleeve and probe blank from the main body - these will be faced off flush with the main body when finishing the probe.

Finishing the probes


Next, we can finish the simpler of the two probes - the fixed one. Ideally the body should be held in a collet of known accuracy, as we are aiming for

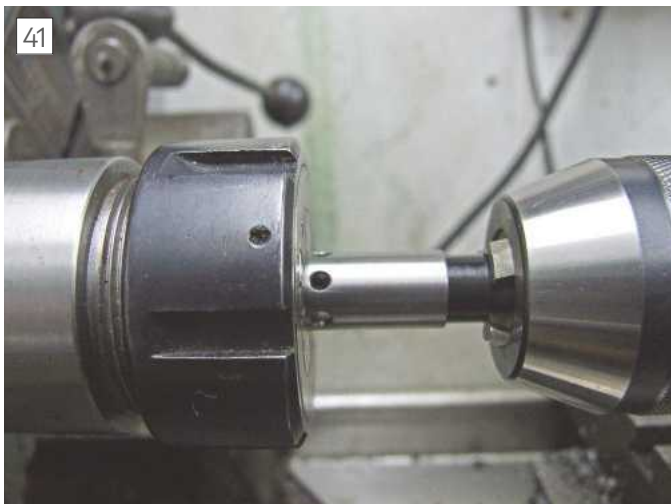

Pressing the probe and insulating sleeve into the main body.



The bodies are now ready for the probes to be machined.

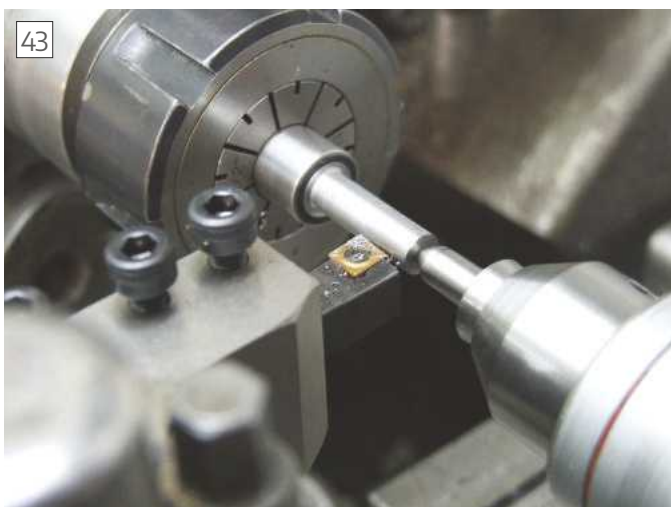

Machining the fixed probe to finished diameter.



Machining the ball seat - using a feeler to help gauge depth of cut.

the best concentricity between main body and probe, together with a size of 0.2500" diameter, which is a good test of finish machining skills. It helps to have tailstock support to control the forces created by the cutting tool.

Photograph 43 shows the final cut being taken, which achieved a size of half a thou over the nominal finished diameter, following which I decided to polish to remove the final half a thou and achieve a better finish. Job done, so then I moved on to finish machine the ball-ended probe.

The stem of the ball-ended probe is in clearance to the gauging diameter, so exact size is not critical, but it should allow for overrun of the ball which has been designed at around 0.010" (each way), so a total diameter reduction of 0.030" seemed more than adequate, and therefore a finished diameter of 0.220" has been specified. Again, it is wise to use a tailstock centre when machining this, as an accurate centre will allow the 3mm diameter hole, and more importantly the ball seat, to be

concentric with the main body.

Once the 3mm hole has been drilled, it is time to finish the probe by machining the seat for the ball. For this operation I used a 1/4" ball-ended slot drill. The depth of the ball seat is 0.045" from the end face of the probe, which of course now has a 3mm hole in it. To gauge depth I placed a 0.025" thick rule on the end of the probe and touched it with the cutter, **photo 44**. This gave me a datum to zero my tailstock micrometer, after which I machined the seating by advancing the cutter 0.070" (0.045" for the seat plus 0.025" for the rule).

If you don't have any form of accurately measuring the movement of the tailstock barrel, then marking the end of the probe with a marker pen (or similar) will allow you to see the remaining 'land' between the seating and the edge of the probe - around 0.015" is ideal. It's just to avoid a sharp edge between the seat and the stem of the probe. I used a cutting compound, together with slow speed and feed to provide for a good finish, **photo 45**.

Miscellaneous parts (ball-ended probe only)

The final parts to complete the ball-ended probe are the moving parts, which consist of a ball, M2.5 x 30 capscREW and spring. These are shown assembled in **photo 46**.

Ball

The ball can be made from either bronze or stainless steel, both of which can be obtained from model engineering suppliers. I found that these were spot-on size, which is exactly what we need. Although I test drilled and tapped both stainless and bronze balls without any problems, my preference for this project was bronze purely on the matter of wear - it's easier to replace a ball than the probe body, although re-seating the probe body would be possible. Given our usage it is unlikely that wear would be a problem, so use whatever you can obtain easily.

Holding the ball in the simple holder (fig. 2.7), the first operation is to




The ball seat has now been formed - note the 'land' rather than a sharp corner.



The probe moving parts.



Spot facing the ball prior to producing the M2.5 threaded hole.

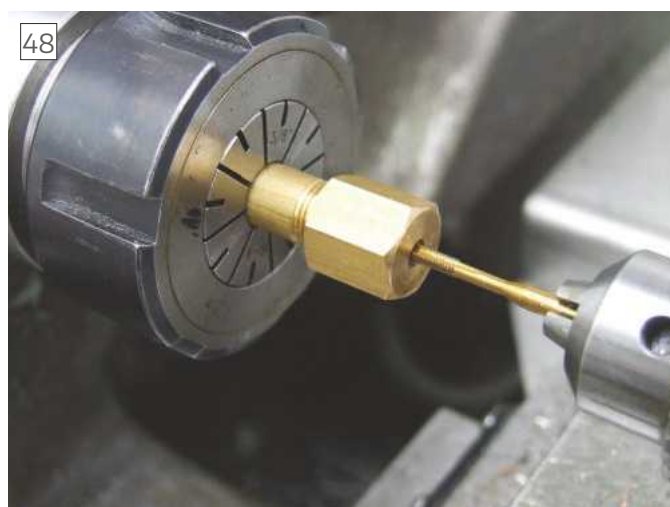

Tapping the ball M2.5.

drill an M2.5 tapping size hole to a maximum depth of around 0.220" to avoid breaking through or deforming the surface of the ball.

Then, just to make a neat job, I machined a flat on the ball using a 3.5mm 3-flute cutter in order to avoid raising a rough edge when tapping the M2.5 hole. This requires an infeed of just 0.020" from the first touch of the part-drilled ball, **photo 47**. Then drill and tap M2.5 to depth, **photo 48**.

Once done, remove the ball from the holder and gently stone off any burrs thrown up by either the facing or tapping operations.

Spring

I used a short length of stainless spring as sold by our model engineering suppliers for use with safety valves, although any suitable spring that you have to hand would be suitable. I made my spring around 0.3" long after flattening the ends on the grindstone. The spring needs to be sufficiently strong to 'snap' the ball back into its

seat if displaced, but not too strong to require excessive force to move it.

Final assembly and testing

The edge finder with the plain probe only needs the fitting of the cartridge and end cap/contact spring to complete, assuming that the cartridge has been tested and works ok. I did experience some problems where Araldite had been deposited on the wire and formed an insulating barrier which was quickly removed.

Assembly of the ball-ended edge finder is a little more involved, requiring the addition of the capscrew, spring and ball, which I fitted 'finger tight' to allow for future removal if required. To fit the ball you will need a long hexagon key (2mm AF) - I found that a tee-handled key was suitable for this.

As for testing, this can be achieved by fitting into a chuck or collet of known accuracy and the brought up to the edge of a component until it lights up and the slide reading noted (or DRO zeroed). Then if the chuck is rotated

in steps of, say, 90 degrees you will get a good indication of accuracy. For the ball-ended edge finder displace the ball slightly and then withdraw, repeating and noting the reading to assess repeatability.

References and sourcing

I purchased the materials required from the following sources, with which I have no connection apart from being a satisfied customer. There will, of course, be other suppliers of these materials.
LED and resistors: Bright Components - www.bright-components.co.uk,
The Component Shop - www.componentshop.co.uk
Acrylic tube 10mm od x 1.5mm wall: eBay
Acetyl (white and black): Noggin End Metals - www.nogginend.com
Spring $\frac{3}{16}$ " x 23swg stainless: Polly Model Engineering www.pollymodelengineering.co.uk
Low melt solder (70 deg): Eileens Emporium - www.eileensemporium.com ■

An Easy Tapping Guide

Bob McMenemie describes a simple but invaluable aid to getting a fiddly job done well



We all know the importance of starting a thread perpendicular to the work surface, otherwise the tap could wander from the centre line and cause all sorts of problems. There are fixtures you can make or buy that will ensure the tap keeps to its correct position, these tapping guides are a real benefit if you have one.

But hey! Why bother when you most probably have the main body of the tool already at your disposal – a bench drill press.


The idea is to make a fitting for the tap holder which is a round bar in line with the main axis of the holder and is fitted on the end of the holder, the bar is put in the chuck of the press drill and lightly hand tightened, with the tap firmly fitted in the tap holder the work is centralised over the hole to be tapped as normal.

The drill press chuck is then slightly loosened so that the tap holder can be rotated by hand with the chuck stationary, and the round bar is able to move up and down in the chuck, the tapping by hand can now begin.

Unplug the drill press before fitting the tapping guide!

Making the fitting

A piece of steel for the bar must have a diameter able to fit in the press drill chuck, the one I made is 10mm diameter mild steel, and about 40mm long. The bar is given a centre hole at one end to accommodate a lathe

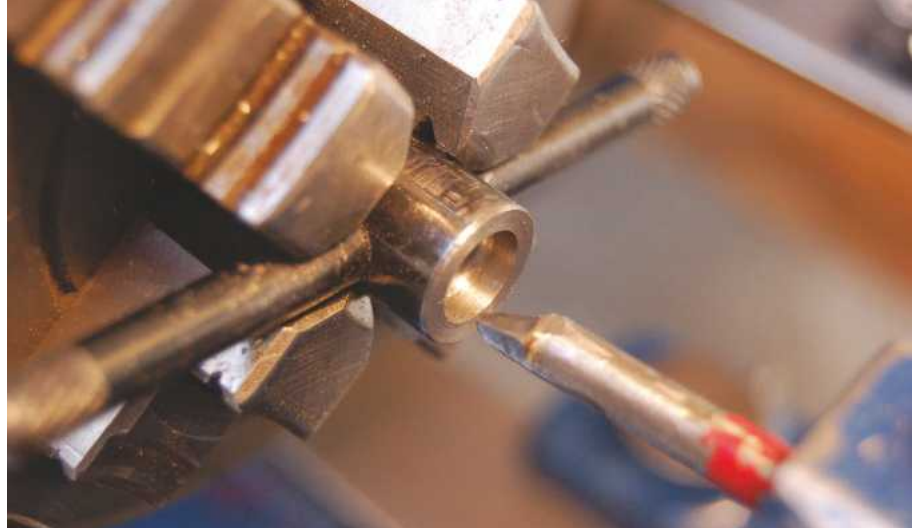

Boring the tapping holder head.

centre set in the tailstock later.

The tap holder must be bored out to suit the above diameter, there is not a lot of length available to bore out of the holder due to its own tommy bar, about 10mm, but the depth of bore need only be about 4mm. A carbide tool is necessary for this, HSS won't touch the hardened steel. A reasonably good fit is necessary here as the bar will be Loctited in the holder.

It might seem a small amount to bore out, but the piece does not need to have massive strength it is only for guidance purposes. I used ordinary Loctite which has served its purpose for a number of years, probably Loctite 638 would be more suitable as it has a longer adjustment time.

If carbide tooling is not available another option is to make a sleeve which will overlap the tap holder head which is about 14mm in diameter and turn the other end to suit the drill press chuck.

It is necessary that the axis of the bar sits in line with the axis of the holder as best as possible and to make sure it is, the chuck of the tap holder is tightened up and held central in the lathe chuck, the turned area just before the tommy bar is checked with a dti and adjusted to be on centre.

The bar is now offered up to the tap holder and with a tailstock centre applied to the centre hole in the bar, Loctite administered to the joint and pressed home, the work is rotated and the axis is set as central as possible. ■



Fitting the bar to the holder.



The tapping guide in use.

A.m.€ 01952 879607

Abbotts Model Engineering
Makers of fine 5" & 7 1/4" Gauge
Locomotives & Rolling Stock

See Website for up to date info.
Please re-fresh your website browser.



Home of 5" & 7.1/4" g battery electric locomotives and rolling stock.

**Selection of locomotives
to suit all budgets & requirements.**

**The largest selection of
driving and passenger trucks anywhere.**

Most ready within 2 weeks

**Find us on Facebook for latest info,
videos and some fun stuff.**

**You are most welcome to visit our
showroom, please phone first.**

Unit D7, Haybrook Ind Est, Halesfield 9, Telford, TF7 4QW

Shop open Mon to Fri 9.00am to 4.00pm
Locomotives, Coaches & Trucks all on display
(See website for products & updates)

www.ametrains.co.uk



Class 50 Hoover
£3,450 (inc VAT)

Class 52 Western
£3,450 (inc VAT)

www.phoenixlocos.com
01784 548 957

Wheels! In 5", 7 1/4" & 10 1/4" gauges



Contact 17D:
Email: sales@17d.uk
Tel: 01629 825070
or 07780 956423



5" gauge, profiled 3 Hole Disc
Set 4 wheels on axles: £68.20



8 Spoke wagon wheelsets -
5" g. £79.99 - 7 1/4" g. £149.99



Plain Disc Wheels - each:
5" gauge £10.70
7 1/4" gauge £15.99
10 1/4" gauge £58.00



Bogie Kits - 8 Wheels / 4 Axles
5" gauge: £219.99 - 7 1/4" gauge £299.00



7 1/4" Narrow gauge:
Set 4 x 6" Wheels with
axles, sprockets and
bearings: £184.99

Wheels only: £22.85 ea.

5" N/gauge wheels:
4 1/2" Dia. £15.95 ea.

Axles also available



7 1/4" g. 3 Hole Disc
wheelsets
4 wheels/2 axles
£99.99

Also available:
10 1/4" g. profiled
3 hole disc
wagon wheels
£98.99 each



Romulus Wheels £78.99 ea.
Sweet William £78.99

All prices are ex-works and subject to VAT



MINIATURE RAILWAY SPECIALISTS LOCOMOTIVES, ROLLING STOCK, COMPONENTS CNC MACHINING SERVICES

www.17d-ltd.co.uk

17D Limited, Units 12 & 13 Via Gellia Mill, Bonsall, Matlock, Derbyshire, DE4 2AJ

Introducing Milling Machines

Until twenty or thirty years ago most home workshops did not contain a milling machine and it was common to carry out milling on the lathe, still a good approach for the beginner and to be covered in a future issue. The advent of truly affordable benchtop machines has brought them in the easy reach of most hobbyists.


A typical vertical mill bears a superficial resemblance to a bench drilling machine, having a vertical spindle that can be move up and down, but there are several detailed differences. The whole machine will be much more rigid and the spindle will be designed to take heavy sideways loads, as well as up and down ones. There will be provision for moving the spindle up and down (the z-axis) by small, accurate, amounts and locking it in place. Instead of a simple table on which to fix the work, there will be a larger one that is capable of being moved accurately back and forth and side to side (the x and y directions). These differences enable 'cuts' to be applied in three dimensions allowing complex shapes to be machined using special cutters.

These differences mean that a typical milling machine can serve as a rather ponderous drilling machine, but a drilling machine, even if fitted with an x-y table, will rarely be capable of satisfactory milling work.

Horizontal mills have a spindle placed so that cutters run sideways over the work table, often supported by a stout over-arm arrangement. They are less common in hobby workshops as they are less flexible in use, but are often capable of heavier duty for their size. Some larger machines have both a 'vertical head' and a horizontal spindle.

Vertical milling machines can be broadly divided into two types - benchtop mills and turret mills. As the name suggests the benchtop machines are smaller and well suited to the needs of a hobby workshop. The Conquest Super variable speed mill is typical of many machines produced by SEIG in China and is a popular choice with beginners, **photo 1**. It is one of their X2 range which is almost as varied as their

1

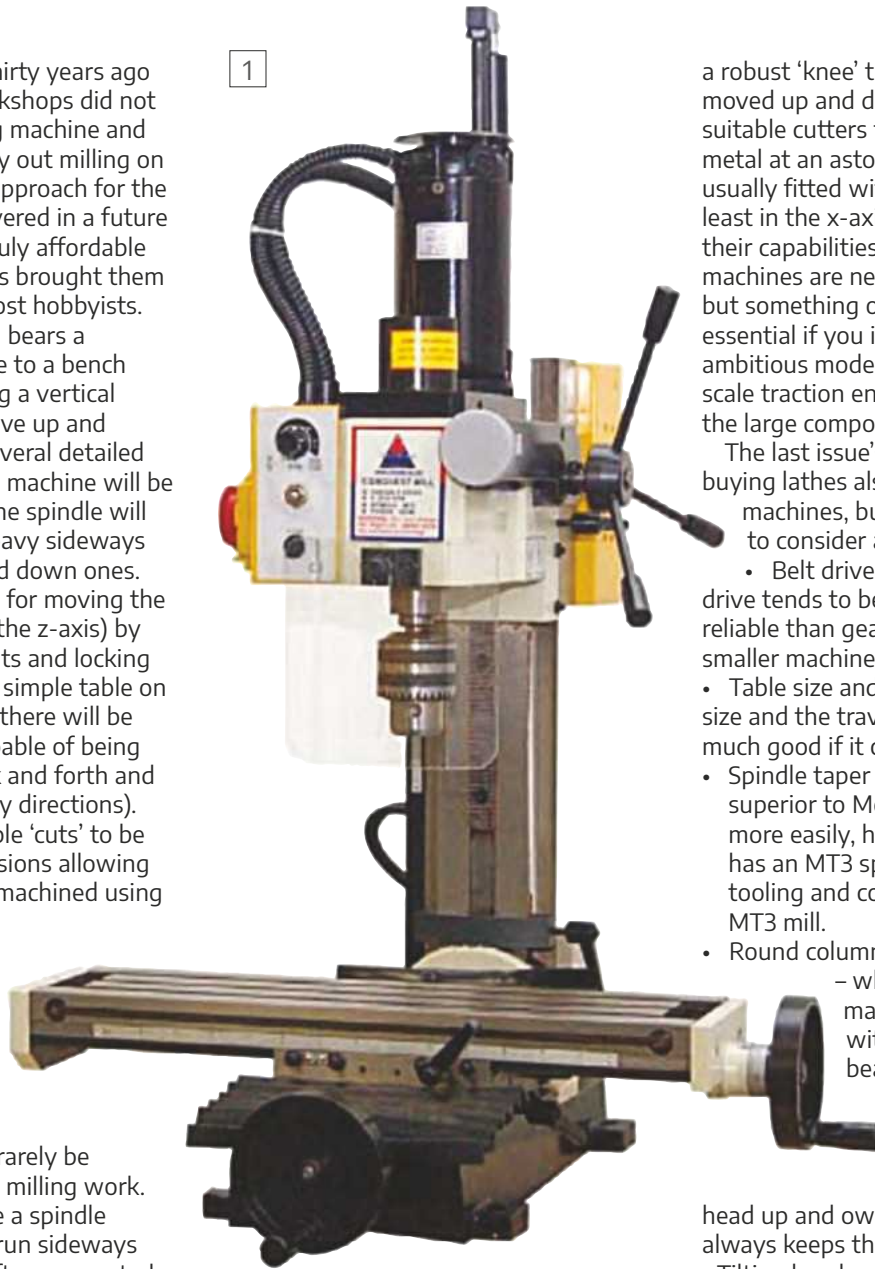

Chester UK's Conquest Mill is a popular entry-level machine.

range of mini-lathe models.

An example of a machine at the larger end of the bench mill field is the WM18, **photo 2**, a robust mill, capable of a wide range of milling applications. Available in metric with R8 spindle taper it has a 1.1kw variable speed motor and metal gears. Table travel is an impressive 565 by 370mm.

The turret type of mill, often colloquially called a 'Bridgeport' after a leading manufacturer, is floor-standing (rather than mounted on a stand) and will have the table mounted on

a robust 'knee' that allows it to be moved up and down, **photo 3**. With suitable cutters these mills can remove metal at an astonishing rate – they are usually fitted with automatic feed at least in the x-axis, in order to exploit their capabilities to the maximum. Such machines are neither cheap nor small, but something of this type is almost essential if you intend to produce ambitious models such as four-inch scale traction engines and machine all the large components yourself.

The last issue's general advice about buying lathes also applies to milling machines, but some special issues to consider are:

- Belt drive or gear drive – belt drive tends to be quieter and more reliable than gear drive, especially for smaller machines.
- Table size and travel – check both the size and the travel – a huge table is not much good if it can't move very far!
- Spindle taper – R8 is technically superior to Morse taper, as it releases more easily, however, if your lathe has an MT3 spindle it can share tooling and collet chucks with an MT3 mill.
- Round column or dovetail column – while you can get more machine for your money with a round column mill bear in mind that it can be very difficult to keep the spindle accurately aligned when you move the head up and down. A dovetail column always keeps the spindle aligned.
- Tilting head or column – these can seem very handy extras, but are not essential as a tilting vice will often suffice for angled cuts.

Using a Milling Machine

In many ways a milling machine is more intuitive than using a lathe. The milling cutter has to be held in the spindle (using a proper milling collet chuck, not a drill chuck) and the work is securely fixed to the machine's table or held in a vice on the table. The cut is set by adjusting the X, Y and Z axes of the mill to align the cutter with the work, and the actual cut is taken by moving one of the axes.

The correct depth of cut for any

machine will depend on its size and rigidity and the type of cutter used. A general rule of thumb for modest machines is that the typical depth of cut should not exceed about one-half of the cutter's diameter. When using small or fragile cutters the depth of cut should be further be reduced.

Cutter Holders

Although some cutters can be fitted directly into the mill spindle, the majority have cylindrical shanks (usually in a limited range of metric or imperial sizes) that may or may not have a screw thread. These are designed to be held in suitable collets that, in turn, fit in holders which you have to match to your mill's spindle taper (typically R8, MT2 or MT3 for smaller mills).

The most common system for holding cutters is the ER (Extended Range) system which is available in many sizes, ER25 and ER32 (the number is the outside diameter in millimetres) are popular. Each ER collet will hold a range of cutter diameters, typically with a 1mm range for larger sizes and 0.5mm for very small sizes.

You may also come across various other systems including some 'ER-alike' systems – these can be harder to find spare or extra collets for and are rarely any cheaper than ER systems. You may also come across collet chucks for threaded cutters to the Clarkson and Osborne (also known as 'posilock') designs - they both take the same cutter sizes. Bear in mind that you can hold threaded cutters in plain collects (using the smooth part of the shank), you can't use threaded collets for plain shank cutters.

It is worth mentioning that some cutters, including FC3 'throwaway' cutters, come with plain 6mm or $\frac{1}{4}$ " shanks with a small flat – these are designed to be held in very simple holders and secured with a grub screw.

Milling Cutters

In the recent past the commonest milling cutters were end mills and slot drills, and these are still likely to be regularly encountered, **photo 4**. Slot drills have two cutting edges and are excellent for cutting a slot to an exact width or for plunging into the work like a drill, as they have asymmetric cutting edges on the end that cut right to the centre. End mills have four cutting edges are normally used to cut only on their sides as they tend to 'wander' if cutting a slot.

2



The WM18 from Warco is a sizeable machine.

They cannot be plunged into the work.

Modern sharpening technology has moved on, and it is now possible to economically sharpen three and four-flute cutters so that they can be plunged into work, just like a slot drill. Three-flute cutters, including the small inexpensive FC3 throw-away cutters, prove as good, or better, for cutting accurate slots as traditional slot drills. This is a big advantage for production as a single cutter can be used for multiple operations.

The best advice is to take a look at the end of your cutter before using it, if one cutting edge is longer than the others and reaches to the centre, then it will be possible to take plunging cuts with it.

Like lathe tools, you also have a choice between high speed steel (HSS) and tungsten carbide tools. Carbide tools run at around three-times the speed of HSS tools and need to be worked fairly hard to enjoy the advantages they

3



This Bridgeport Mill is typical of those found in commercial engineering workshops and much favoured by hobbyists fortunate enough to have the space for one.

4



Left to right: Slot drill with threaded shank, four flute end-mill, 'rippa' cutter, three-flute carbide end mill, FC3 'throwaway' end mill.

offer. Slower running HSS tools are both cheaper and more forgiving (in particular they are less likely to chip if abused) and are recommended for beginners.

Rippa Cutters

Rippa end mills have serrated edges; they don't leave as good a finish as ordinary cutters, but they work more efficiently and are useful for removing metal faster if you have a medium-sized mill.

Fly Cutters

A fly cutter is a single point tool, often a bar of high-speed steel in a holder, sharpened rather like a knife tool that is used at slow speed (because of the large diameter it sweeps) to take broad shallow cuts across a surface, **photo 5**. The disadvantage with fly cutters is they need to be fed across the work very slowly, but as long as the mill spindle is accurately perpendicular to the work they can leave a very smooth, accurate finish. They are also relatively inexpensive.

Face Mills

Face mills often use tungsten carbide inserts to provide the cutting edges.

They are chiefly used for taking wide, relatively shallow, cuts across a surface. While they do not leave as fine a finish as a flycutter, they are faster to use.

Slitting Saws and Side and Face Cutters

Slitting saws are literally small circular saws used for cutting off material or making thin slots. Side and face cutters

5



A simple home-made flycutter.

6



Dovetail and t-slot cutters

are thicker and have teeth that extend on to their sides. Many beginners make the mistake of running slitting saws too fast and blunting them. In fact, a typical 75mm slitting saw is best run at a speed as low as 70 to 80 rpm when cutting steel.

Special Cutters

A whole host of specially shaped cutters are available, such as for cutting dovetails and t-slots or for making concave or convex shapes, photo 6. It is best not to invest in too many 'specials' at the start until you have a clear idea of the sort of work you will be carrying out.

Cutter Speeds

Speeds for milling cutters are broadly in line with those for lathe work, except you should use the diameter of the cutter. This means small cutters often run fast – perhaps a few thousand rpm for small tungsten carbide cutters, while larger cutters, especially HSS ones should be operated at much lower speeds. Last month's chart for lathe cutting speeds can also be used to estimate milling cutter speeds.

If the milling machine has excessive play in its slides or is not well set up, the work can also suddenly move forwards being 'grabbed' by the cutter.

Conventional and Climb Milling

If you think of the side of a milling cutter cutting into the side of a workpiece, there are clearly two ways in which you can move the work past the cutter. Conventional milling pushes the work against the rotation of the cutter. This tends to stop the tool 'digging in' and prevents the work being 'grabbed' by the cutter. For these reasons it is the recommended way for beginners to work.

Allowing the work to move past the cutter in the direction it is rotating is called 'climb milling' because it has the tendency to cause the cutter to 'climb out of the work'. If the milling machine has excessive play in its slides or is not well set up, the work can also suddenly move forwards being 'grabbed' by the cutter. This can cause damage to the cutter or to the work, so climb milling is best left to the experienced who are confident that their machine is both rigid enough and well enough set up to climb mill successfully.

You may ask why climb mill at all? There are two reasons. First it can produce a better finish and a very light final climbing cut in the reverse direction can be used on lighter machines to take advantage of this. The second reason is that because it forms chips that start thick and finish thin it reduces the shock of the tool's cutting edges leaving the work – a major cause of excessive tool wear in high-speed CNC milling.

To sum up, unless you have a rigid machine with little or no backlash (such as a CNC machine with ballscrews) it is best to avoid all but the lightest of climbing cuts. ■

DIRECT DEBIT SUBSCRIPTIONS (UK ONLY)

Yes, I would like to subscribe to **Model Engineers' Workshop**

- ☐ Print + Digital: £13.50 every 3 months
☐ Print Subscription: £11.25 every 3 months

YOUR DETAILS MUST BE COMPLETED

Mr/Mrs/Miss/Ms Initial Surname
 Address
 Postcode Country
 Tel Mobile
 Email D.O.B.

I WOULD LIKE TO SEND A GIFT TO:

Mr/Mrs/Miss/Ms Initial Surname
 Address
 Postcode Country

INSTRUCTIONS TO YOUR BANK/BUILDING SOCIETY

Originator's reference 422562 
 Name of bank
 Address of bank
 Postcode
 Account holder
 Signature Date

Sort code Account number

Instructions to your bank or building society: Please pay MyTimeMedia Ltd. Direct Debits from the account detailed in this instruction subject to the safeguards assured by the Direct Debit Guarantee. I understand that this instruction may remain with MyTimeMedia Ltd and if so, details will be passed electronically to my bank/building society.

Reference Number (official use only)

Please note that banks and building societies may not accept Direct Debit instructions from some types of account.

CARD PAYMENTS & OVERSEAS

Yes, I would like to subscribe to **Model Engineers' Workshop**, for 1 year with a one-off payment

UK ONLY:

- ☐ Print + Digital: £56.99
☐ Print: £47.99

EUROPE & ROW:

- ☐ EU Print + Digital: £64.95
☐ EU Print: £55.95
☐ ROW Print + Digital: £71.95 CC
☐ ROW Print: £62.95 CC

PAYMENT DETAILS

- ☐ Postal Order/Cheque ☐ Visa/MasterCard ☐ Maestro
 Please make cheques payable to MyTimeMedia Ltd and write code MEW2021 on the back

Cardholder's name

Card no: (Maestro)

Valid from Expiry date Maestro issue no

Signature Date


TERMS & CONDITIONS: Offer ends 31st December 2021. MyTimeMedia collects your data so that we can fulfil your subscription. We may also, from time to time, send you details of MyTimeMedia offers, events and competitions but you always have a choice and can opt out by emailing us at unsubscribe@modelengineersworkshop.co.uk. Please select here if you are happy to receive such offers by email ☐ or by post ☐ by phone ☐. We do not share or sell your data with third parties. Details you share with us will be managed as outlined in our Private Policy here <http://www.mytimemedia.co.uk/privacy-policy>. Please visit www.mytimemedia.co.uk/terms for full terms and conditions

**HURRY
OFFER
CLOSES**
31st December 2021



PRINT + DIGITAL SUBSCRIPTION

- 1 year's worth **delivered to your door**
- **Great Savings** on the shop price
- **Download** each new issue to your device
- A **75% discount** on your Digital Subscription
- Access your subscription on **multiple devices**
- Access to the **Online Archive** dating back to Summer 1990

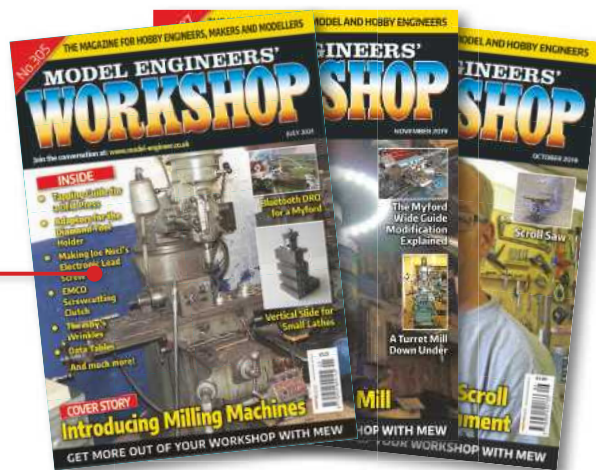

PRINT SUBSCRIPTION

- 1 year's worth **delivered to your door**
- **Great Savings** on the shop price
- Save up **to 23% off the shop price**

SUBSCRIBE TODAY

**POST THIS FORM TO: MODEL ENGINEERS' WORKSHOP
 SUBSCRIPTIONS, MYTIMEMEDIA LTD,
 3 QUEENSBRIDGE, THE LAKES, NORTHAMPTON NN4 7BF**

DIGITAL
SUBSCRIPTIONS
AVAILABLE ONLINE!

MODEL ENGINEERS' WORKSHOP

Get your favourite magazine for less, delivered to your door when you subscribe today!

Model Engineers' Workshop is ideal for enthusiasts who operate a home engineering workshop for both model construction or to support an engineering related hobby. The magazine covers machine and hand tools; accessories and attachments, materials and processes. It provides guidance on the selection, commissioning and use of tools and equipment. It is the essential guide for any workshop.



TERMS & CONDITIONS: Offer ends 31st December 2021.

**This digital discount is only available when you subscribe to the 'Print + Digital' package. You can still get a great discount on the digital package, please visit the URL stated below for more information. Please see www.mytimemedia.co.uk/terms for full terms and conditions.

SUBSCRIBE SECURELY ONLINE

 <https://me.secureorder.co.uk/mew/MEW2021>

CALL OUR ORDER LINE Quote ref: MEW2021

 **0344 243 9023**

Lines open Mon - Fri - 8.00am - 8.00pm GMT & Sat - 9.30am - 3.30pm GMT.

Calls are charged at the same rate as standard UK landlines and are included as part of any inclusive or free minutes allowances. There are no additional charges with this number. Overseas calls will cost more.

A Vertical Drilling/Milling Slide for The Small Lathe



Terry Gorin describes a slide designed for his Unimat but potentially for any small lathe



Slide components

When needed, the headstock and spindle of the Unimat SL1000 lathe can be mounted vertically, with the spindle at 90 degrees perpendicular to and above the bed, thereby adding a Z axis for drilling and milling operations. Spindle axial movement within the headstock is approximately 25mm, but movement was not originally indexable. An indexing screw, previously added as a modification, enables the spindle and cutting tool to be set a pre-determined height above the cross-slide but a vertical slide will be required if the workpiece, of necessity, also needs to be raised above the cross-slide.

Design


A vertical version of the existing Unimat cross-slide was a possibility, but I was

not sure of the rigidity of a workpiece relying on the compound effect of three round bar slideways! A conventional dovetail slide, suitably sized for this small lathe, was the final choice. Stock size BMS material was used for the main components for ease and simplicity of construction. In a commercially available slide the base plate and male slide are usually combined in cast iron, but I considered that the BMS bolted construction described here will give adequate rigidity for its intended use. The separate, finished components of the slide are detailed in **fig. 1** and **fig. 2** and **photo 1**. **Figure 3** and **photo 2** show the components assembled.

Not having machined dovetails before meant searching the internet and the MEW forum for information. The website 'johnf'sworkshop/

A vertical version of the existing Unimat cross-slide was a possibility, but I was not sure of the rigidity of a workpiece relying on the compound effect of three round bar slideways!


Fig.1

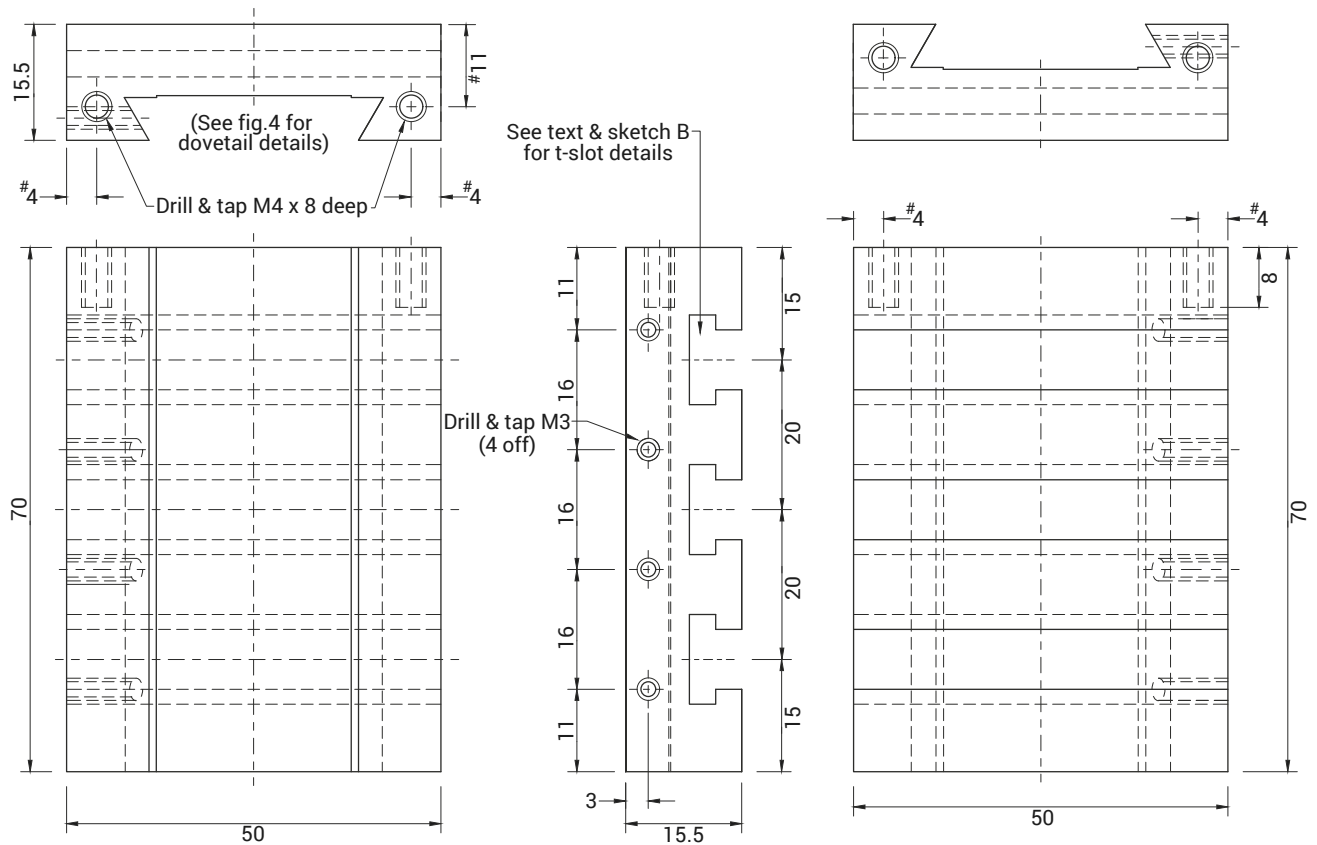


Dovetail slides

All dimensions in millimeters unless otherwise stated

Fig.2

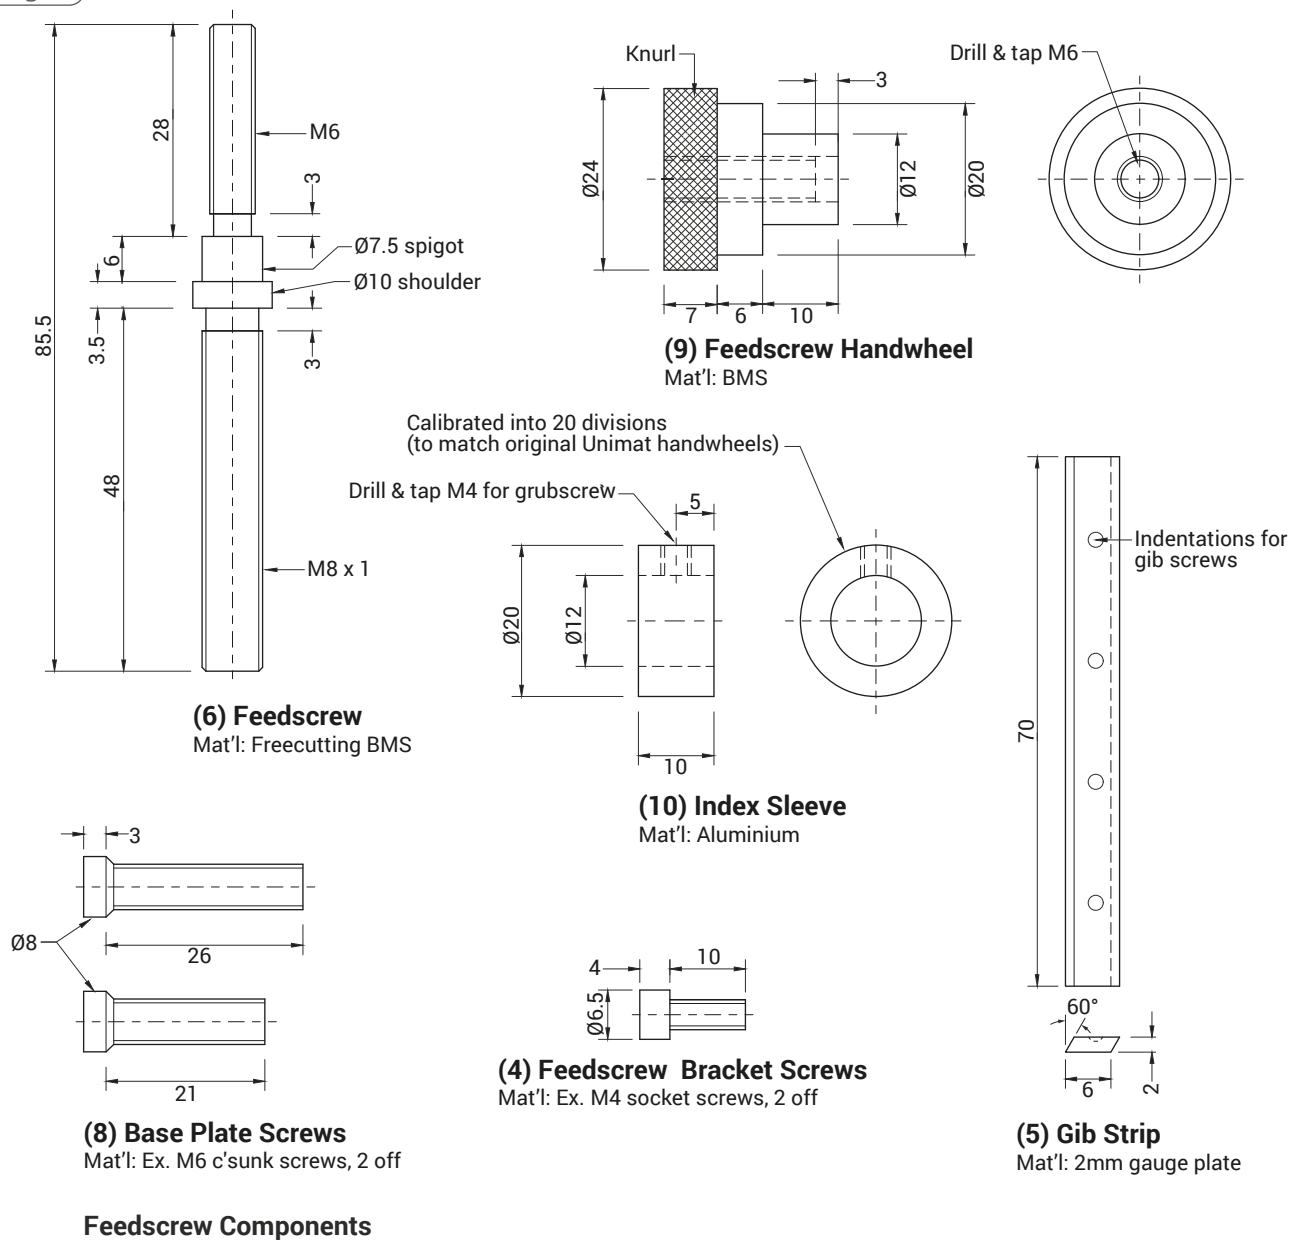

making dovetails' finally helped my understanding of the essentials of what I was trying to achieve, which was not trying to match a new dovetail to an existing (needing some knowledge of dovetail geometry mathematics) but simply creating new male and female dovetails needing only to match each other and sliding on two faces only. **Sketch A** shows schematically the only dovetail dimensions needed for this small slide, and repeated in **fig. 4** and **fig. 5**, to produce the sliding faces shown as SF in the sketch. For a larger slide these dimensions might be increased but, more importantly, similar differences between them would still be necessary to ensure the clearances

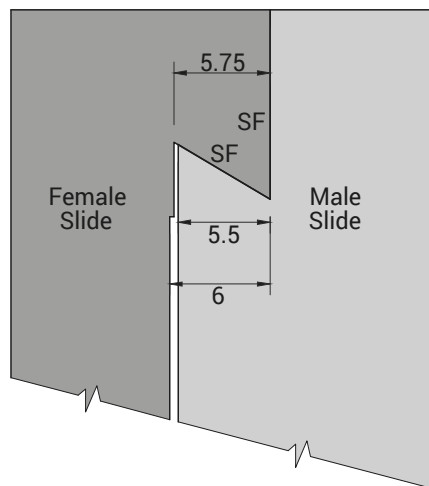


Sketch A. Dovetail Schematic

between surfaces that are not meant to be in sliding contact.

Construction

All machining was carried out using the Myford lathe and vertical slide with all milling using cutter adaptors with drawbar (as per MEW article from June 2014), my first project after purchasing the Myford. The female slide (1) and male slide (2) were fabricated first, in that order, and all milling was carried out with the workpieces reliably bolted, not vice held, direct to the vertical slide. Not wanting any clamping bolt holes to show in these relatively small slides when finished, I decided to temporarily increase lengths of both components,

Fig.3

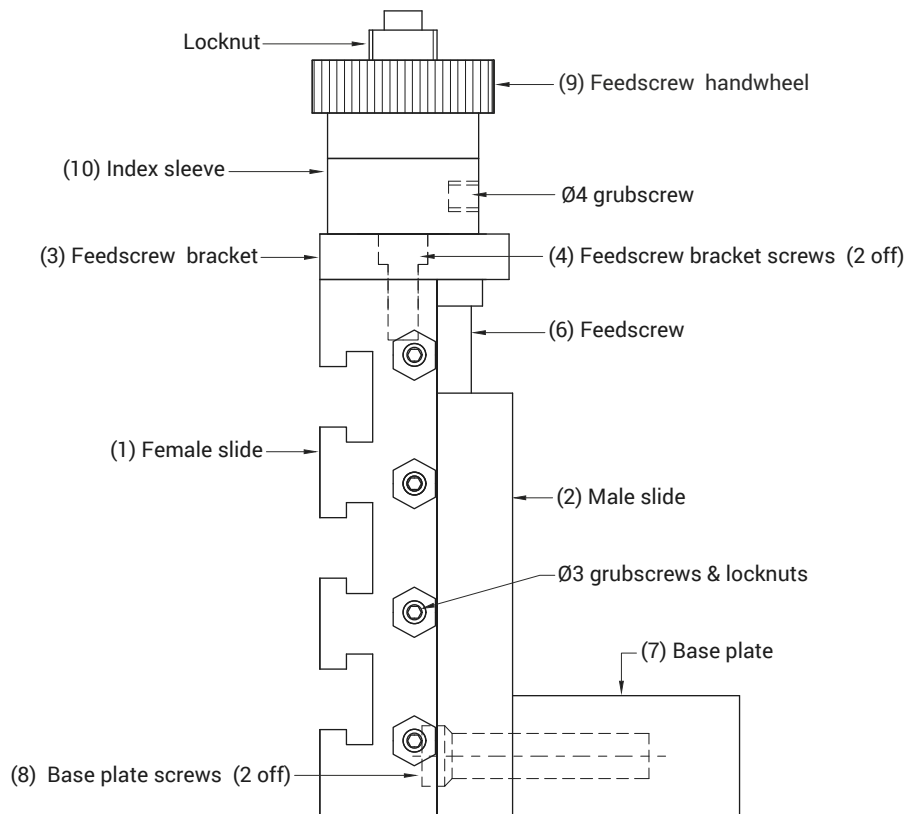

Vertical Slide Assembled



Slide assembled

as fig. 4 and fig. 5, (Having determined that the total increased lengths of the slides, plus tool clearances, were within the Myford cross-slide traverse). Both were then cut from 50 x 16 mm BMS (bright mild steel) and holes drilled and

counter-bored to the depths shown to ensure that clamping bolt socket heads are clear of the cutters when milling. For machining the dovetails, both slide workpieces in turn, were bolted, as indicated in **photo 4**, to the central slot of the Myford slide, parallel to and perpendicular to the lathe bed and spindle. The workpieces when mounted in this position also fell comfortably within the vertical traverse of the Myford slide for machining both

slides. When first mounting the Myford slide, and checking for horizontal and vertical alignment, also took care that the bottom of the slide cleared the front edge of the saddle when at its lowest. **Photograph 3** shows from left to right the large T-slot cutter, 8mm diameter slot drill, dovetail cutter and woodruff cutter used for machining the slides.

Female Slide (1)

Referring to fig. 4, machining was



Tools used

carried out in the stages shown in the drawing and described below. Stage 1 – single pass facing cuts were taken to the full length and width of the workpiece using the large T-slot cutter (too large for the T-slots on this slide but proved excellent as a facing cutter). Saddle locked before cutting. Thickness of slide then reduced to about 15.5mm, not a critical dimension.

Stage 2 – an 8mm dia. slot drill was used to mill out the central recess of the dovetail. Using the Myford leadscrew in conjunction with the cross-slide and vertical slide feedscrews, progressive cuts were taken to the final depth and width shown. The saddle locked between and before final cuts. Photograph 4 shows the completed recess with the dovetail cutter mounted for the next stage.

Stage 3 – The 25mm dia. 60-degree cutter, was used to cut the lower dovetail first, (only because it was more easily visible for a first attempt!) The cutter was advanced the 5.75mm dimension into the milled recess and saddle again locked (and not unlocked until completion of both upper and lower dovetails). By combination of slide feedscrew and cross-slide, cutting to the lower dovetail was continued, until the lower 11mm dimension was reached, see **photo 5**, the workpiece then raised to cut the top dovetail, see **photo 6**, until the upper 11mm dimension reached. These dimensions were only to centralize and create a female dovetail width proportional to the size of the slide, absolute accuracy was not essential. The male dovetails will be cut to match.

Cutting T-slots


The part finished female slide was next re-bolted vertically to the Myford slide top and bottom slots, with the dovetails facing the vertical slide and the 20mm centre line spacings of the slots marked out on the slide face to be machined, as fig. 1 and detailed in **Sketch B**. In turn, each slot centre line was first centralised on the 8mm dia. slot drill and milled to the full 7mm depth. The imperial sized $\frac{1}{2} \times \frac{1}{8}$ woodruff cutter then replaced the slot drill, at the same height and, when aligned with the bottom of the previously cut slot, and fed through in a single pass, produced a finished T-slot of same size as the Unimat standard slot. The same procedure then repeated for the remaining slots, as **photo 7**. The slide was then set aside, but the Myford slide not yet removed.



Milling female slide



Milling lower dovetail

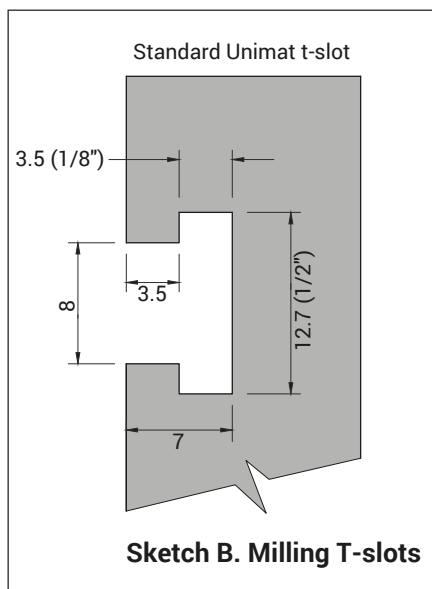

Male Slide (2)

Referring to fig. 5, the machining was again carried out in stages as described below and shown in the drawing.

Stage 1 – As before, facing cuts were taken to the full length and width of the workpiece with the saddle locked.

Stage 2 – The 8mm dia. slot drill was used to mill the recesses shown. The saddle again locked between and before final cuts.


Stage 3 – The top of the workpiece was marked as the gib side of the finished slide. When finished, the non-gib (or 'plain') sides, of both the male and female slides to be flush when assembled. The difference in width of the gib and 'plain' sides of the male slide dovetails, indicated in fig. 5 as 13 and 11, is needed to accommodate the

2mm thick gib and facilitated the cutting and fitting of the dovetails by 'trial and error'. The lower dovetail was started first. The workpiece was advanced 5.5mm by leadscrew until the tip of the dovetail cutter was just 'shaving' the depth of the previously milled slot, as fig. 5, and the saddle locked (and not unlocked until completion of both upper and lower dovetails). By cross-slide and slide feedscrews the lower dovetail was cut, from below, until the initial depth reached was about 0.5mm less than the final depth (11mm) required. The workpiece was next lowered to the gib dovetail position and progressively cut, from above, until the female slide was just able to engage and slide over



Completing upper dovetail

Fig.4

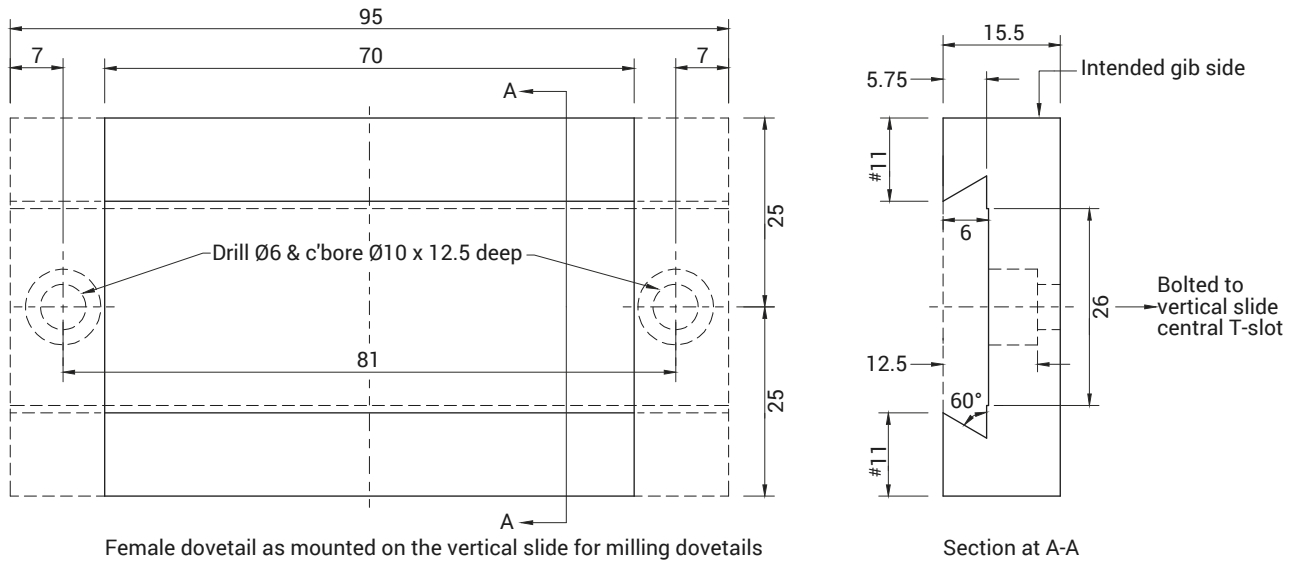

Female Dovetail Details

the male slide (indicated as initial cut). The workpiece was then returned to the lower 'plain' dovetail and, with the female slide now able to slide up into close contact with its male, further cutting and testing carried out until, by sight and touch, the 'plain' sides of both female and male slides were flush. At this point the workpiece was finally, again raised to complete the gib dovetail. A short length of 2mm thick gauge plate, but slightly narrower than the completed gib, shown in fig. 2, was prepared as a test piece. Further cutting and testing of the gib dovetail was continued until the gib test piece slid easily into its slot (Indicated as Final cut). (The gib sides of both male and female slides should now be marked to ensure correct assembly later when completing). The part finished male slide was removed from the lathe and set



Milling T-slots

aside. The now surplus, elongated ends of both male and female slides could now be sawn off and both square turned to their final lengths as shown in fig. 1.

Completion of female slide

The Feedscrew bracket (3) was next fabricated. The 4mm dia. holes in the bracket were drilled and counter bored but the central hole position was drilled 4mm dia. only at this point. The bracket was then aligned and clamped to the top of the female slide, as fig. 3, the positions of the M4 tappings, at the top of the female slide, were spot drilled through the 4mm dia. holes at the top of the bracket, and then drilled and tapped to the depths shown in fig. 1. The previously marked gib side of the slide was then drilled and tapped M3 for the gib screws to complete the slide. Gib Strip (5) was initially cut 8mm

WHAT IS AVAXHOME?

AVAXHOME-

the biggest Internet portal,
providing you various content:
brand new books, trending movies,
fresh magazines, hot games,
recent software, latest music releases.

Unlimited satisfaction one low price
Cheap constant access to piping hot media
Protect your downloadings from Big brother
Safer, than torrent-trackers

18 years of seamless operation and our users' satisfaction

All languages
Brand new content
One site




AVXLIVE ICU


AvaxHome - Your End Place

We have everything for all of your needs. Just open <https://avxlive.icu>

Fig.5

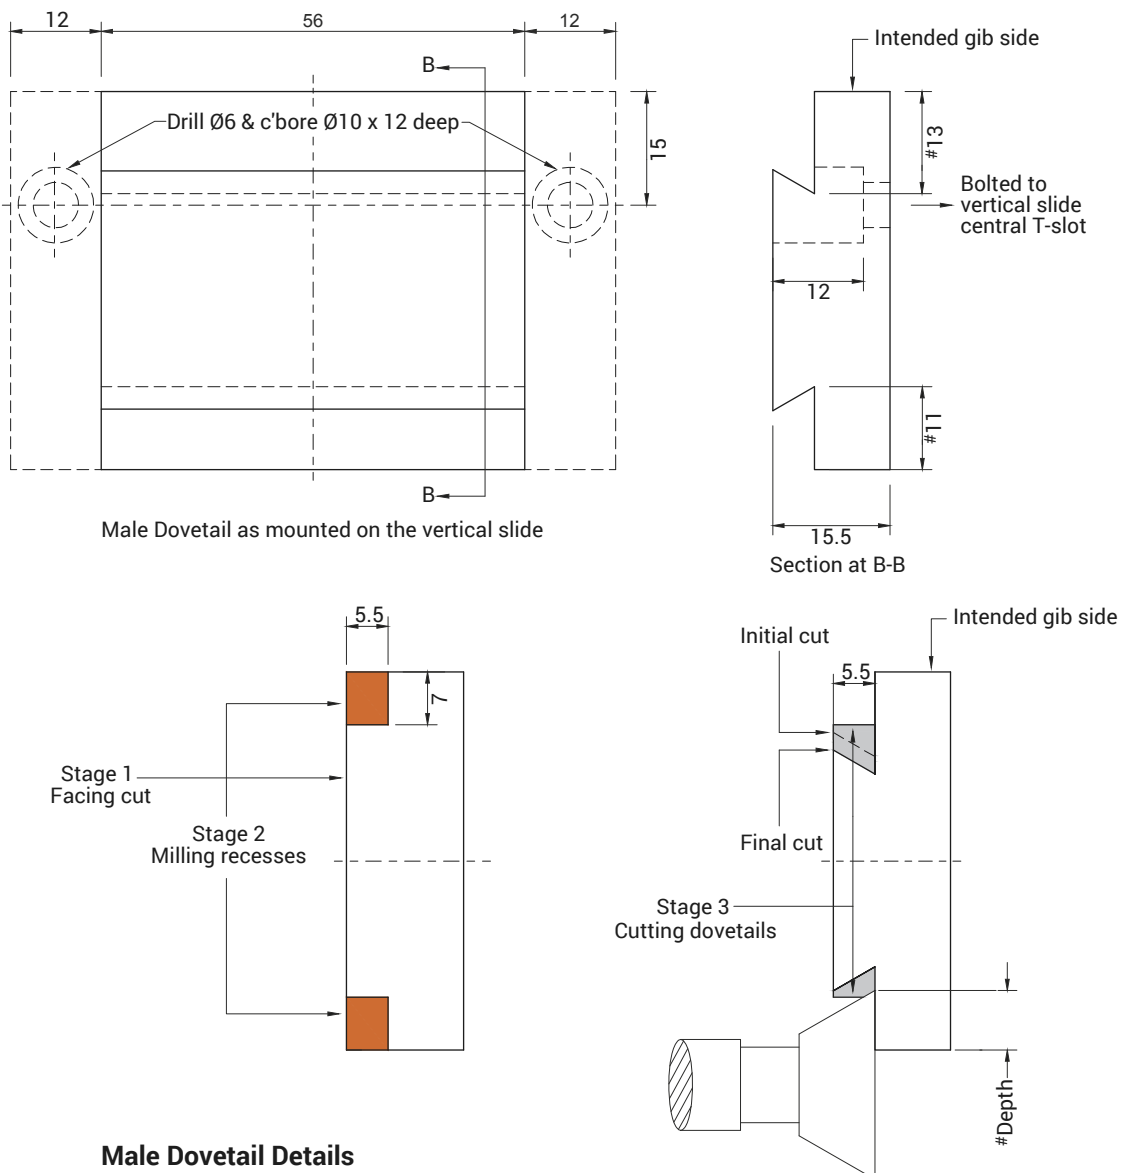

Male Dovetail Details

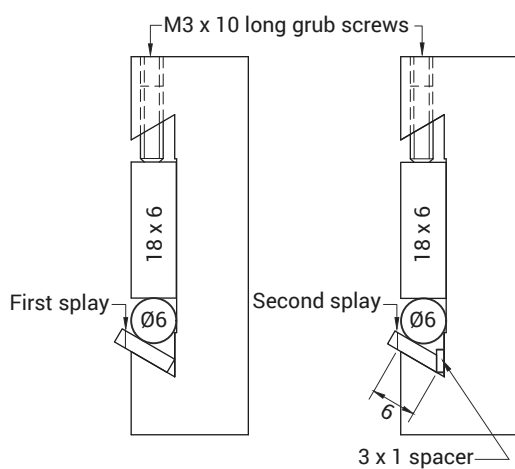


Sketch C. Milling Gib Splays

wide to enable the edges to be splayed using the completed female slide as a fixture as indicated in **Sketch C**. For the first splay cut, the gib was clamped tight against the lower dovetail using a 6mm dia. parallel and 18 x 6mm packing piece, all held in place by grub screws. The assembly then held in a milling vice clamped to the Myford slide, now remounted, checked for horizontal and vertical alignment, and the first splay milled by slot drill. For the second splay the gib was reversed, set to protrude about 5mm from the vice towards the operator, and the first splay clamped tight against a 3 x 1 packing as indicated. The packing to prevent damage to the female slide when cutting and the protrusion for checking gib width, when and after cutting second splay. To complete, the gib was next 'sandwiched' between male and female slide dovetails, the grub crews tightened to mark locations, and these then centre pointed and enlarged by 3mm dia. drill tip. These indentations have proved adequate for this slide, but a larger version would benefit from indentations milled at the appropriate angle.

●To be continued



Bringing British industrial history to life

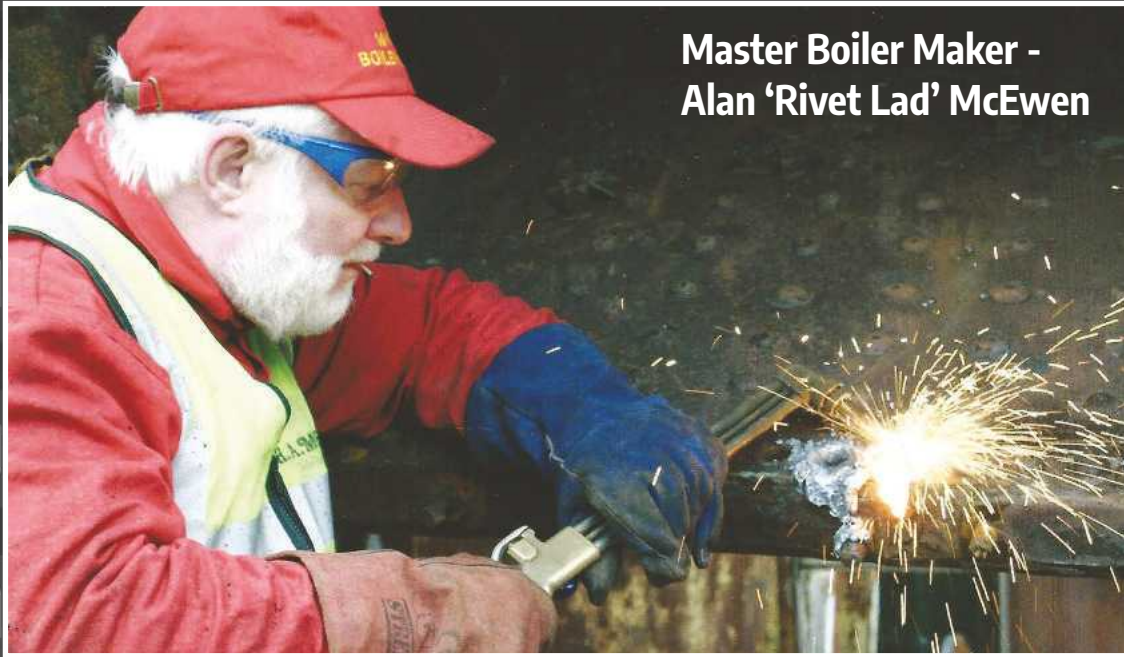

Master Boiler Maker -
Alan 'Rivet Lad' McEwen

When Master Boiler Maker and author, Alan McEwen was a young sprog, he loved banging and hammering on rusty old boilers; now that he is an old hog, he just prefers others to bang and hammer!

Alan McEwen's Boiler Making adventures and also 'potted histories' of several Lancashire and Yorkshire Boiler Making firms, can be read in **RIVET LAD - Lusty Tales of Boiler Making in the Lancashire Mill Towns of the 1960s**. The book is crammed with 'hands on' technical information of how Lancashire, Locomotive, Economic, and Cochran Vertical boilers were repaired over 50 years ago. The book's larger-than-life characters, the hard as nails, ale-sipping, chain-smoking Boiler Makers: Carrot Cramphorn, Reuben 'Iron Man' Ramsbottom, Teddy Tulip, genial Irishman Paddy O'Boyle, and not least Alan himself, are, to a man, throw-backs to times gone by when British industry was the envy of the world.

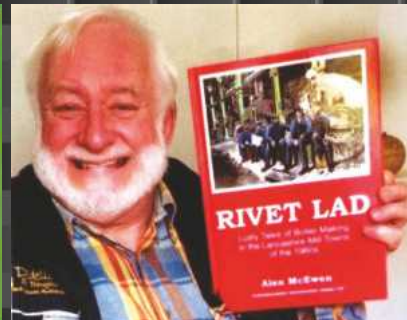

Alan McEwen's first RIVET LAD book: **RIVET LAD - Lusty Tales of Boiler Making in the Lancashire Mill Towns of the Sixties** published September 2017 is now priced at £25 plus £3.00 postage and packing to UK addresses.

Alan's second RIVET LAD book: **RIVET LAD - More Battles With Old Steam Boilers** was published in September 2018. Now priced at £25 including postage and packing to UK addresses.

★ BOOK BUNDLE SPECIAL OFFER ★

Both RIVET LAD books can be purchased together for £40 plus £5 postage and packing to UK addresses. To place an order please telephone 01535 637153 / 07971 906105. All our books can be ordered on our website www.sledgehammerengineeringpress.co.uk or email: lankyboilermaker@btconnect.com.

Overseas customers contact Sledgehammer by email for postage costs.

We accept payment by debit/credit card, cheques, cash and postal orders made out to **SLEDGEHAMMER ENGINEERING PRESS LTD.**

World From Rough Stones House, Farling Top, Cowling, North Yorkshire, BD22 0NW.

Testing a Three Phase Motor



David Dunn uses an transformer and capacitor to run small three phase motors from a single phase supply.

Most of MEW readers are practical folk who, with a variety of hobbies, out of sheer necessity dabble in mechanics, woodwork and electrical matters as a matter of course.

Various articles have appeared from time to time referring to the use of and conversions to three phase power. To some, electrical knowledge is almost a black art and indeed has many facets.

It can also be dangerous, but then many of our activities have potential for injuries when the brain is not in gear. I have to say (or our editor would) that all the usual hazards of mains wiring are present of course, and if you are not confident you can do the work safely, find someone who can. Switching off the supply and standing on a rubber mat is always a good precaution when working with high voltages. An error could be fatal.

It does not seem to be common knowledge that even if you only have a single-phase supply, it is easy to check

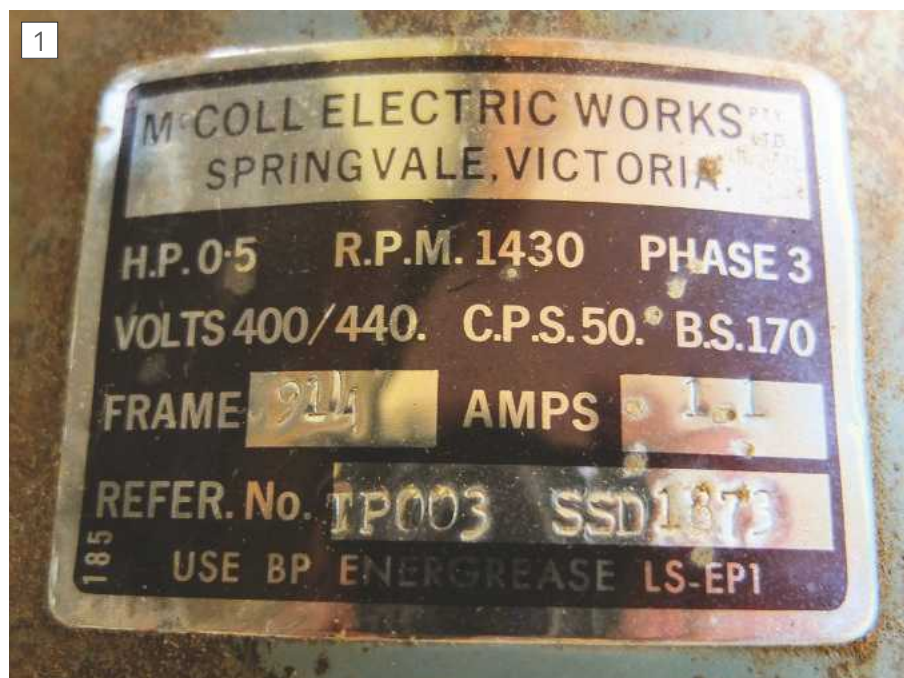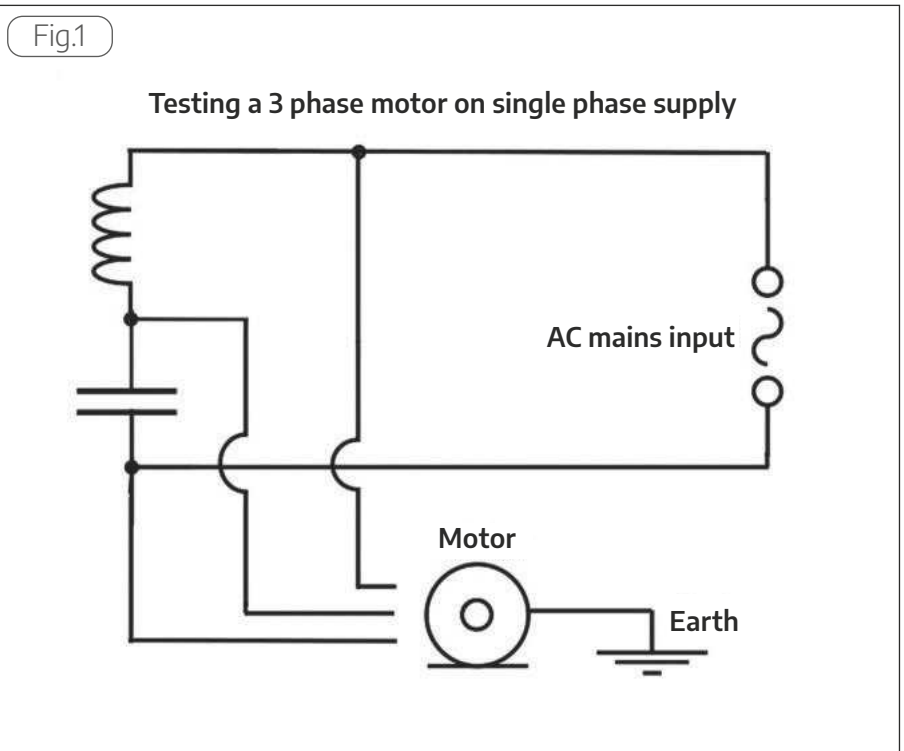

Motor rating plate

or make use of a 3 phase motor using a simple device. It is the same principle that the commercially available inverters use. I offer this little tip mainly for the convenience of readers who may come across 3 phase motors with unknown qualities (often at scrap price in auctions and garage sales) and this is an easy test of the unknown.

There are technical limitations relating to the actual components regarding the power available and I suggest that without delving deeper into the theory it is only used for light use or testing, but commonsense applies.

The circuit diagram, **fig. 1**, shows the set up. it is easily assembled in a few minutes with soldered or chock block connectors as required. I have for some years used three phase motors to run items this way as a permanent installation several times. Components must be installed in a suitable box of course. A capacitor

and an inductor is required to produce the third phase. I used a transformer (from my “junk” store) which is simply a mains input primary with various windings on the secondary-the output side – only the primary is used and the criteria is simply that it can pass the required current and has a fairly substantial iron core. A transformer of the type used to provide the required 110 volts for building site appliances is quite suitable. The capacitor must be one suitable for AC mains use, not an electrolytic type. The value is not critical, 8 microfarad or more will work, the one pictured is from an old fluorescent tube unit, or a starter capacitor from a refrigerator, but most induction motors have a starter capacitor which would be suitable. The motor has a plate affixed, **photo 1**, which gives specifications and at the quoted 1.1 Amp its needs are easily catered for.

Connect up as shown, using the three “live” wires of the motor. The earth should be obvious, and it is a good idea to connect that first as a precautionary measure. It does not matter which order the three wires are connected. “choc blocks” are handy for test purposes. The wires to the transformer and the capacitor are soldered. Motor connections, **photo 2**,



Motor connections

are usually self-explanatory and may or may not be marked. The example had no markings inside the cover, The fourth connection has a (green) earth wire to the frame leaving the other three for the phase wires. A length of 4 core cable happened to be handy and that was used to make the test. Colours of 3 phase wiring have been changed over a few years and have also been different in several countries. Do not rely on those alone: white, red, black, grey, yellow and blue may

be found. Earth is usually a green or green/ yellow stripe.

Ensure the motor can't fall if it 'jolts' when switched on. Make sure all connections are inaccessible before connecting the supply and switching on. Assuming the motor turns, then changing over any two of the motor connections will change the direction of rotation. ■

In our Next Issue

Coming up in issue 306
On Sale 23rd July 2021

Content may be subject to change

Look out for MEW 306, the August issue, greets the summer with more great workshop builds and ideas:



Howard Lewis explains how to make a heavy duty rear toolpost.



John Gittins introduces his indexable rotary table design.



Laurie Leonard adds further versatility to the Worden Grinder.

DON'T MISS THIS GREAT ISSUE - SEE PAGE 46 FOR OUR LATEST SUBSCRIPTION OFFER

Fitting a Screwcutting Clutch to the Emco Maximat Super 11



Graham Meek describes an accessory thirty-three years in the making - Part 2.

Now is the time to assemble the lower bearing assembly, **photo 12**. I thought this part of the conversion was going to give me the greatest headache as there is no machined face under the headstock end hold down bolt. In fairness to Emco the machined face is not required for the hold down bolt. To minimise the effect of the rough cast surface there is an aluminium washer between the bed and the lower bearing. A further clamp on the front of the bed, **photo 13**, ensures the assembly cannot twist about the hold down bolt. A pre-assembly of the unit will be found an advantage. The common 8.5mm dimension allows these two faces to be aligned on a flat surface and the M5 capscrew tightened. The pillar between the two parts aids to further rigidity and the above pre-assembly. However, the lower bearing assembly cannot be tightened on the machine just yet. Using a piece of BMS the same size as the eventual drop link but a little longer. Try the alignment of the top bell crank clevis with the lower clevis. If the bar slides freely in both,






Lower bearing assembly.

start tightening the hold down bolt and the clamp on the bed. Take it in stages checking each time the fit of the bar in the clevis and the freedom of rotation

of the trip rod lever in its bearings. Once satisfied that all is both securely tightened but the parts are still free to move things can move on.

Make an embryo drop link, a little longer than drawn, but only produce the reamed and tapped hole in the one end only. Remove the control unit from the bedway and assemble the embryo drop link. Returning the control unit with the drop link is not easy. Place some rag in the void beneath the headstock. Holding the drop link lower the control unit through the bedways onto this rag. Now feed the drop link down towards the lower bearing. At the same time coax the control unit back up into its correct position and slide the support bar beneath. By slightly lowering the back end of the ram and manipulating the connecting link from the changewheel end. Slip the connecting link onto the ram dowel. Assemble the phosphor bronze slider, (short end nearest the

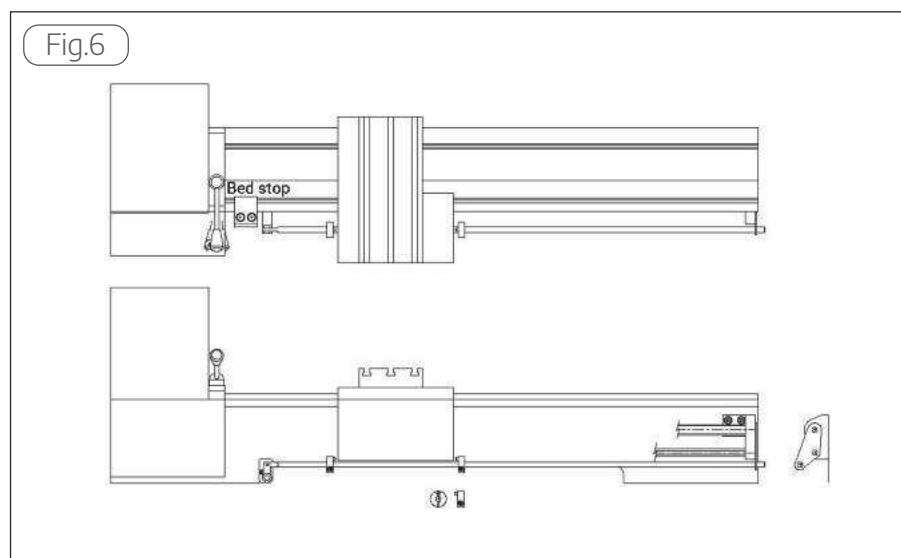

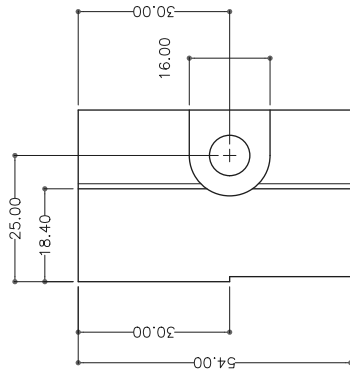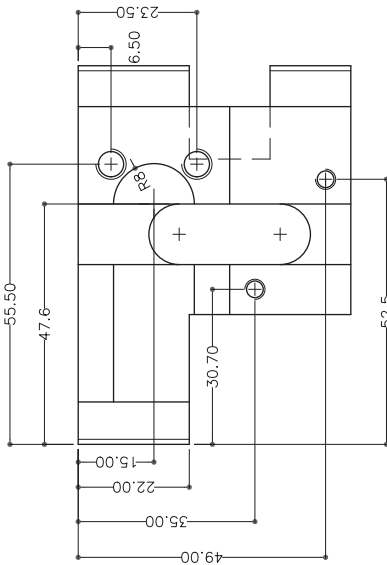


Technical drawing of a mechanical part showing front and top views with dimensions.

Front View (Left):


- Overall height: 15.00
- Distance from bottom to the center of the hole: 5.50
- Overall width: 4.00
- Internal hole: Represented by a circle with an 'X' inside.

Top View (Right):

- Overall width: 4.00
- Distance from the left edge to the center of the hole: 3.50
- Internal hole: Represented by a circle with a diagonal line through it.

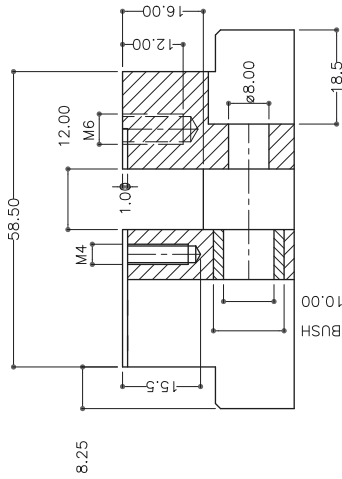


Technical drawing of a rectangular plate with dimensions and hole locations. The plate has a total width of 32.00 and a total height of 24.00. There are two circular holes, each with a diameter of $\phi 1.00$. The center of the hole on the left is located 5.00 from the left edge and 5.00 from the bottom edge. The center of the hole on the right is located 19.00 from the left edge and 5.00 from the top edge.




Orthographic projection of a mechanical part. The drawing includes a front view, a top view, and a side view. Key dimensions are: overall length 48.50, overall width 15.00, overall height 7.50, and various internal features defined by dimensions like 23.50, 17.50, 10.00, 5.00, 4.00, 8.00, 3.00, and 8.00. The part has a complex profile with a semi-circular feature on the side view and a circular hole on the top view.

Technical drawing of a mechanical part with the following dimensions:

- Overall height: 75.00
- Overall width: 34.00
- Left vertical dimension: 41.60
- Left vertical dimension: 25.7
- Horizontal distance from left edge to center of hole: 14.00
- Radius of hole: R6

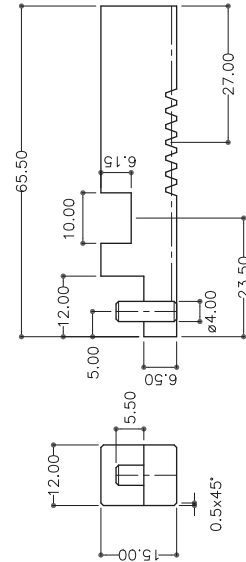

20 Tooth Segment Gear 1 Mod
Mat'l: Mild steel

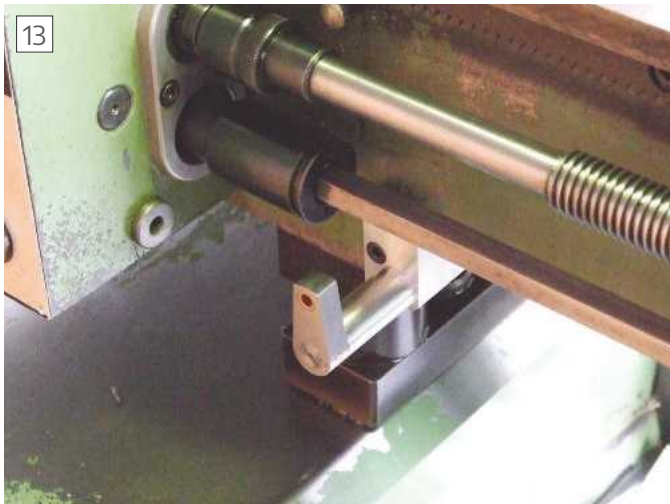

Trip rod lever.



Trip rod attachment and stop.

operator), the slider operating lever and the bed clamp; but do not fully tighten. Put the control lever on and locate the flat on the lever. Urge the assembly towards the headstock and lock in place. Select neutral and check that the bell crank is 30 degrees above the horizontal, it should be if assembled correctly.

Slip the drop link between the lower clevis. Ensure the trip rod lever on the outer end is vertical. Then using a sharp 4mm drill spot through onto the drop link. This is done using finger and thumb, a bright spot, not a dimple is all that is required. Regrettably, the disassembly has to take place again, and the drop link finished off. If the drop link was at all tight during the last assembly just drawfile the faces around the holes. The removal of 0.03mm, or 0.001" off each face will make a huge difference. Then for the last time the above procedure is followed to insert the drop link. It is very difficult to be precise about the length of this link. Slight variation of the headstock laterally on the bed and the bed casting thickness around the hold down bolt are all going to affect this length. Not to mention the build up of dimensions in the parts being fitted. The theoretical

Once the first portion is milled the cutter is withdrawn, the table returned to the start position and the rod moved along the set-up.



Support for trip rod, tailstock end.

length is 151.31mm, but the link on my machine worked out at 150mm dead.

The trip rod and stops were the next thing to be made, **photos 14** and **15**. The trip rod has a $\frac{1}{16}$ " slot running along the bottom and this slot stops 60mm from the tailstock end. At this point the rod becomes a bearing in the support plate, further the carriage cannot get this far along the bed without removing the tailstock. The slot was machined in three stages on a lash-up on the FB-2 milling machine table. Two mild steel blocks are clamped to the table in-line and parallel to the X-axis movement. A gap is left in the middle of these two blocks, this is for one of the three clamps and packing pieces to get the trip rod up off the table. After milling the flat, drilling and reaming the hole for the trip rod pivot pin the slot can be milled using

a $\frac{1}{16}$ " woodruff key seat cutter. This slot is milled 1.3mm deep, it only needs really to be 1mm deep, but the extra depth is to allow for any mismatch as the rod is moved along the table. Once the first portion is milled the cutter is withdrawn, the table returned to the start position and the rod moved along the set-up. The cutter is then advanced towards the rod and the previously milled portion of the slot manipulated onto the cutter. With the cutter locating the rod radially, urge the rod against the blocks and clamp up. Return the cutter to its original depth setting and proceed with the next phase. The final phase being a repeat of the above. However anyone with a larger machine may be able to do this in one hit.

The stops at first glance look to be a complicated part, **photo 16**, (please note

Fig.8

Selector Fork
Mat'l: Ground flat stock

Trip Lever Spindle
Mat'l: Silver steel

Pushrod Bearing
Mat'l: Phosphor bronze

Pushrod
Mat'l: Silver steel

Selector
Mat'l: Silver steel

Trip Lever
Mat'l: Mild steel


Selector Bush
Mat'l: Mild steel

Trip Lever Bearing
Mat'l: Mild steel


Technical drawing showing dimensions and material specifications for various components:

- Selector Fork** (Ground flat stock): Dimensions include 42.50, 3.20, 2.50, 5.00, R16.50, R12.00, 32.00, 34.50, 10.00, 8.00.
- Trip Lever Spindle** (Silver steel): Dimensions include 44.25, 38.25, 32.25, 7.00, 3.00, 2.00, 5.00, 12, 4, M4, 5.00.
- Pushrod Bearing** (Phosphor bronze): Dimensions include 16.60, 8.00, 10.00, 11.5, M5.
- Pushrod** (Silver steel): Dimensions include 27.00, 5.50, 5.00, 5.00, 6.00, 5.00, M3.
- Selector** (Silver steel): Dimensions include 18.00, 8.00, 7, 10.00.
- Trip Lever** (Mild steel): Dimensions include 18, 10.00, 1.5x45°, 7.00, 24.00, 3.50, 6.50, 3.00, 2.00, 4.00, 6.00.
- Selector Bush** (Mild steel): Dimensions include 10.75, 23.15, 20.15, 2.40, 8.25, 13.25, 22.00, 7, 21.65, 33.15.
- Trip Lever Bearing** (Mild steel): Dimensions include 12.50, 7.00, 5.50, 23, 4.2, 12.00, 25.80, 12, 14.30, 7.50.



Fig.9

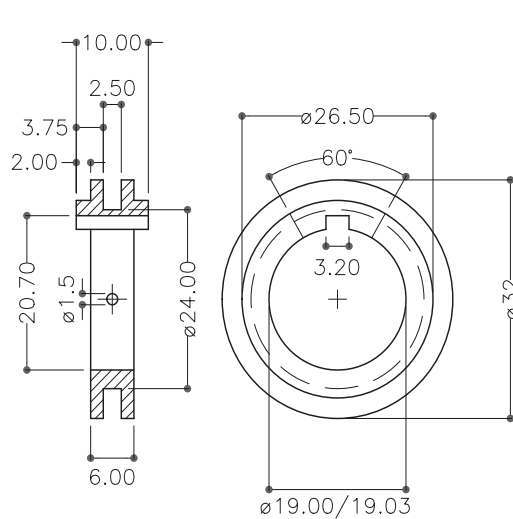


Dog Clutch
Mat'l: EN8

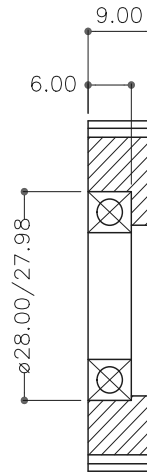


Dog Clutch Gear Assembly
Mat'l: EN24T
Bearing - 17 x 28 x 6 17286VRS

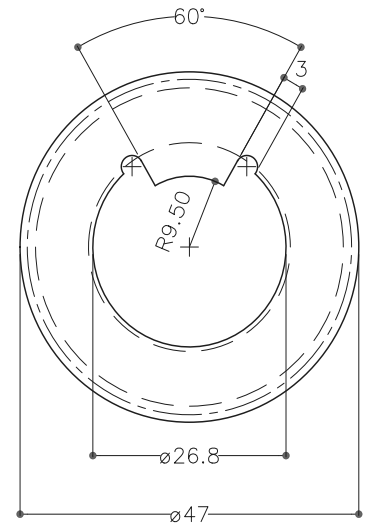

Press fit oiler detail

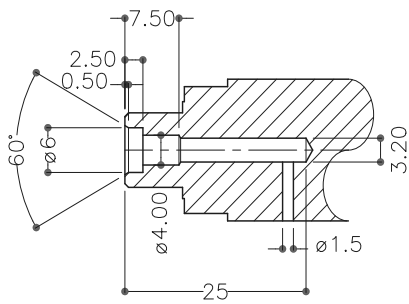

Dog Clutch Shaft
Mat'l: 01 tool steel

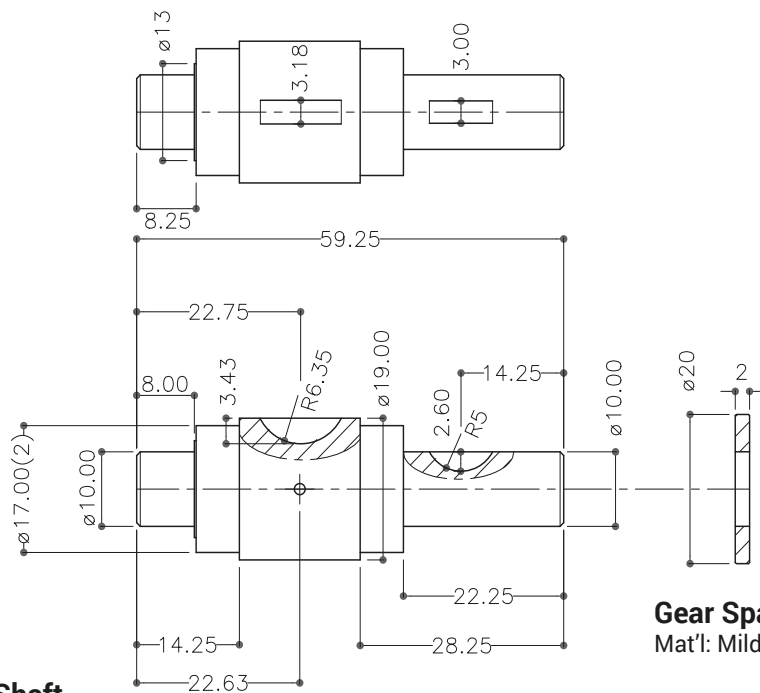

Gear Spacer
Mat'l: Mild steel

16



Trip rod stop, note snug.

these are the prototype stops and differ from the drawing). All work on these parts can be carried out in the milling machine vice once the blanks have been produced. All the holes are first drilled and reamed using coordinate location. The blank being held in the machine vice with a vee block on the moving jaw side of the vice. Then using the top of the vice jaws and dowels in the 3 and 10mm diameter holes, combined with the appropriate stack of slip blocks or a drill shank. There are all the makings of a miniature Sine bar to orientate the part as required. With the part held to the extreme righthand end of the machine vice and the second blank in the bottom of the vice at the left hand end to balance gripping forces. At this first set-up it is possible to drill and ream the 1.5mm diameter snug hole. Mill the flat and produce the slot using a tee slot or woodruff cutter. If a stop has been set to locate the part the second part can be machined in the reverse order. Producing the M6 capscrew location and 2mm wide slot can be done in exactly the same manner. Actual machining time from turning the blanks to finishing the parts, was under two hours.

As the original Oilite bush is being removed from the feed shaft, some form of long term lubrication facility is needed. This comes in the form of a felt pad in the top of the phosphor bronze bearing piece which is pressed into the support plate. The plate is orientated by the flat which is located against the bed face, see photo 13. The whole assembly is retained by the M5 cone point

This screw does not need to be that tight. Too tight and there is a risk of collapsing the bore, while severely damaging the outside diameter.

grubscrew which originally held the Oilite bush. This screw does not need to be that tight. Too tight and there is a risk of collapsing the bore, while severely damaging the outside diameter. Which will make any subsequent removal to replenish the felt pad with oil interesting. The 16.05mm diameter is intentional, this is the size of the Oilite bush used. The 0.05mm is the Press Fit allowance the manufacturer of the bush has chosen for a standard 16mm H7 hole (reamers that give an H7 tolerance are readily available.)

Some readers may notice that there are several parts on this attachment that have been ground, this is not really required. A good turned finish is all that is necessary. I have the convenience of a toolpost grinder. This allows me to produce several different parts and then have a session bringing the

parts to their respective diameters, the lifetime habits and requirements of a Toolmaker die hard.

When setting up to machine a thread the stop has to be set in advance of the actual finishing point, this being the delay, or lost motion mentioned earlier. This is where the handwheel dial is a great help. With the motor off, engage the control lever in the direction of travel, let us say towards the headstock. Ensure full engagement of the dog clutch by turning the chuck by hand a couple of times and keeping gentle pressure on the lever. The handwheel dial is set to zero at the end of the thread in hand, and the stop provisionally set. Return the lever to neutral, wind the saddle back towards the tailstock, select the speed range, (I would not go higher than 400 RPM, slower until accustomed to the unit), and start the motor. Again engage the lever to the left, then using the handwheel continue to feed the carriage towards the headstock until the leadscrew stops revolving, (remember to engage the coupling). The distance from zero is the amount the stop has to be moved along the trip rod towards the headstock, it is also a measurement of the lost motion. Either make a mental note of this dimension or like me write it down. It will assist in setting up in the future. If the travel is beyond zero, then this is the amount the stop needs advancing along the rod towards the tailstock to get the saddle to stop at the zero mark on the dial. Adjust the stop and recheck the setting. Carry out the same procedure at the beginning of the thread, i.e. the tailstock end in this case. Finally checking both settings with the clasp nuts engaged, as moments of inertia need to be taken into account, settings can vary slightly with mandrel speed and the pitch of screw being cut. This sounds a long and protracted method but in practice it is quick and quite simple really. Further as the reader gets to use the attachment more and more, the amount of travel required to trip the clutch will become a known quantity, (the dimension mentioned above), and can be dialled in from the outset, I seem to recall the Hardinge was around 15mm, but do not quote me on this as it is now nearly 40 years since I last operated one.

●To be continued

FREE PRIVATE ADVERTS



Did You Know? You can now place your classified ads by email. Just send the text of your ad, maximum 35 words, to neil.wyatt@mytimemedia.com, together with your full name and address, a landline telephone number, whether it's a for sale or wanted and stating that you accept the terms and conditions for placing classified ads – see below. Please note, we do not publish full addresses to protect your security.

Coronavirus advice is changing!

Please follow local government advice in Wales, Ireland, Scotland or England as appropriate, especially if you are considering buying or selling items for collection. Please respect the needs of delivery drivers to protect their own safety and, if receiving a parcel take sensible precautions when handling anything packaged by someone else.

Machines and Tools Offered

■ Myford 7 or Super 7 bed, SK57768. £25. **T. 01926 624456. Warwick.**

■ Boxford Power Feed Saddle, Tail Stock, Lead Screw. Vertex 4 inch Milling Vice, 6" Rotary Table, 8"x5" Milling Table. Reasonable Offers.

T. 01462 434698. Hertfordshire.

■ Refillable oxygen bottle type ALbee (size of aqualung bottle) and propane bottle, welding torch regulators some brazing rods and wire. £100 ono.

T. 01273587046. Peacehaven.

■ Neilson Compressor CT1619 with 50 litre tank. Clarke filter, lubricator, air drill,

air chisel, die grinder, hoses £80 lot. Buyer collects.

T. 01543 876745. Staffordshire.

Parts and Materials

■ Plastow 3" Burrell traction engine 50 plus castings, list price £609. will accept £350, to go in one lot. Fully machined set of gears spur and bevels, gear cut and splined list price £1178. will accept £500. Set front and rear ali wheel rims. list price £88. will accept £40. Part finished tender in brass £100. Part finished crank, splined £75. Set ali tender and boiler formers £50. Pair used hornplates £50. Photos available buyer to collect.

T. 01902 343724. Wolverhampton.

Magazines, Books and Plans

■ Model Engineers' Workshop nos 1 to 140 with data sheets in mint condition, £140. Sorry cannot split. Buyer collects. Cash on collection.

T. 01722 329919. Salisbury.

Wanted

■ Cowells ME lathe with accessories. Must be in perfect condition. I am too old to buy new, distance no object. **T. 01986 853776. Ipswich/Norwich.**

■ Manual for BOXFORD Model A, or info on where I can find one. Thanks. **T. 01723 892952. Filey, N. Yorkshire.**

YOUR FREE ADVERTISEMENT (Max 36 words plus phone & town - please write clearly)

☐ WANTED ☐ FOR SALE

Phone:	Date:		Town:		
NO MOBILE PHONES, LAND LINES ONLY			Please use nearest well known town		

Adverts will be published in Model Engineer and Model Engineers' Workshop.

The information below will not appear in the advert.

Name

Address

.....

.....

..... Postcode.....

Mobile D.O.B.....

Email address.....

Do you subscribe to Model Engineer ☐ Model Engineers' Workshop ☐

Please post to:

ME/MEW FREE ADS, c/o Neil Wyatt, MyTimeMedia Ltd, Enterprise House, Enterprise Way, Edenbridge, Kent TN8 6HF
Or email to: neil.wyatt@mytimemedia.com

Photocopies of this form are acceptable.

Adverts will be placed as soon as space is available.

Terms and Conditions:

PLEASE NOTE: this page is for private advertisers only. Do not submit this form if you are a trade advertiser. If you wish to place a trade advert please contact David Holden on 07718 64 86 89 or email david.holden@mytimemedia.com

By supplying your email/ address/ telephone/ mobile number you agree to receive communications via email/ telephone/ post from MyTimeMedia Ltd. and other relevant 3rd parties. Please tick here if you DO NOT wish to receive communications from

MyTimeMedia Ltd: Email ☐ Phone ☐ Post ☐
or other relevant 3rd parties: Email ☐ Phone ☐ Post ☐

MODEL ENGINEERS' WORKSHOP CLASSIFIED

Wishing to sell your Lathe, Mill or Complete Workshop?

Full clearances carefully undertaken

Speak to:

Malcolm Bason of MB Tools
01993 882102

Re-homing workshop machinery for 20 years!

Complete home Workshops Purchased

Essex/Nottinghamshire locations
Distance no object!

Tel: **Mike Bidwell**

01245 222743

m: **07801 343850**
bidwells1@btconnect.com

ALWAYS IN STOCK:

Huge range of miniature fixings, including our socket servo screws.

ModelFixings.co.uk

also the home of **ModelBearings.co.uk**

- Taps, Dies & Drills • Adhesives
- Engine & Miniature bearings • Circlips, etc. etc.

Tel/Fax +44 (0)115 854 8791 Email: info@modelfixings.com

BA SCREWS IN BRASS, STEEL AND STAINLESS

SOCKET SCREWS IN STEEL AND STAINLESS • DRILLS • RIVETS • TAPS • DIES • END MILLS SLOT DRILLS etc

Phone or email
lostignition8@gmail.com
for free list

ITEMS MAIL ORDER LTD

Mayfield, Marsh Lane, Saundby
Retford, Notts. DN22 9ES

Tel/Fax 01427 848880
www.itemsmallorderascraws.com

LASER CUTTING

CNC Folding and Machining Fabrication and Welding

All Locomotive & Traction Engine parts.
Your drawings, E-files & Sketches.

m: **0754 200 1823** • t: **01423 734899**
(answer phone)

e: stephen@laserframes.co.uk

Well Cottage, Church Hill, North Rington, LEEDS LS17 0DF

www.laserframes.co.uk

www.model-engineer.co.uk

To advertise here please email

angela.price@mytimemedia.com

GB BOILERS

COPPER BOILERS FOR LOCOMOTIVES AND TRACTION ENGINES etc.

MADE TO ORDER

Constructed to latest standards. UK CA stamped.

Over 20 years experience

Enquiries, Prices and Delivery to:

Telephone: **Coventry 02476 733461**

Mobile: **07817 269164** • Email: gb.boilers@outlook.com

CLOCKMAKING METALS AND BOOKS

CZ120 Compo Brass Sheet/Blanks, CZ121 Brass Bar
CZ126 Brass Tube, EN8 & Mild Steel, Std Silver Steel

Gauge Plate, Suspension Spring Steel
Wheel & Pinion Cutting, Horological Engineering

BRASS PRICES REDUCED

Send Two 1ST Class Stamps For Price List

I.T.COBB, 8 POPLAR AVENUE,

BIRSTALL, LEICESTER, LE4 3DU

TEL 0116 2676063 Email: ian@iantcobb.co.uk

www.iantcobb.co.uk

Meccano Spares

New Reproduction and
Pre-owned Original
Meccano Parts.

www.meccanospares.com

sales@meccanospares.com

Tel: 01299 660 097

To advertise here please email
angela.price@mytimemedia.com

M-MACHINE

Unit 6 Forge Way, Cleveland Trading Estate
Darlington, Co. Durham. DL1 2PJ

Metals for Model Makers

Contact us for Copper, Brass, Aluminium,
Steel, Phosphor Bronze, etc.

PHONE & FAX 01325 381300

e-mail: sales@m-machine.co.uk
www.m-machine-metals.co.uk

TAPS & DIES

Excellent Quality manufactured-supplied



British-box HQS taps dies cuts stainless
ME5(33pcs) **ME4** (30pcs) **BA3**(35pcs) has
all Model Eng 32+40tpi BA, BSB, MTP etc

THE TAP & DIE CO

445 West Green Rd, London N15 3PL

Tel: 020 8888 1865 Fax: 020 8888 4613

www.tapdie.com & www.tap-die.com

Cowells Small Machine Tool Ltd.

Cowells Small Machine Tools Ltd.
Tending Road, Little Belfrey, Colchester CO7 5SH Essex England
Tel/Fax +44 (0)1206 231 792 e-mail: sales@cowells.com

www.cowells.com

Manufactures of high precision screwcutting lathes,
8mm horological collet lathes and
milling machines, plus comprehensive accessory range.
Talk directly to the manufacturer



webuyananyworkshop.com

Re-homing model engineers' workshops across the UK



It's never easy selling a workshop that has
been carefully established over a lifetime. I
will buy your workshop so you don't have to
worry about finding a new home for much
loved workshop equipment and tools.



Please email photos to

andrew@webuyananyworkshop.com

Or to discuss selling your workshop, please
call me on **07918 145419**

All equipment considered: Myford, Warco, Chester, classic British brands etc
Polly steam locomotives also purchased, especially those needing a bit of 'TLC'

DREW EATTS INVITING ENTRIES THE TRANSPORT SALE

EST. 1759

21 SEPTEMBER 2021



A fine exhibition and award winning model of a First World War Railway Gun, built by Mr. D Swan of West Lothian, Scotland between 2006 and 2010
Sold £ 5,000

An exhibition standard, bronze medal winning model of a 2 inch scale Fowler A7 agricultural traction engine
Sold £15,000



AUCTION LOCATION

Dreweatts
Donnington Priory
Newbury
Berkshire RG14 2JE

ENQUIRIES

Michael Matthews
+44 (0) 7858 363064
mmatthews@dreweatts.com
dreweatts.com

Catalogue and free online bidding at: dreweatts.com



MODEL MAKING METALS

1/32in. to 12in. dia. bright steel, stainless steel, bronze, spring steel, brass, aluminium, silver steel, steel tubes, bolts, nuts & screws, tap dies + drills, white metal casting alloys.

Fine materials, chain, plastic.

Lathe milling machines and equipment, new and secondhand.

Mail order nationwide and worldwide callers

Mon.-Fri. 9 - 5pm. *All cards welcome.*

Send now for a **FREE** catalogue or phone

**Milton Keynes Metals, Dept. ME,
Ridge Hill Farm, Little Horwood Road, Nash,
Milton Keynes MK17 0EH.**

Tel: (01296) 713631 Fax: (01296) 713032

www.mkmetals.co.uk

email: sales@mkmetals.co.uk

MODEL ENGINEER

BECOME PART OF
THE ONLINE
COMMUNITY FOR
MODEL ENGINEER MAGAZINE



- Get access to exclusive competitions and giveaways
- Exclusive articles and advice from professionals
- Join our forum and make your views count
- Sign up to receive our monthly newsletter
- Subscribe and get additional content including Online Archives dating back to 2001*
- Register for free today and join our friendly community!

WWW.MODEL-ENGINEER.CO.UK

* only available with digital or print + digital subscriptions

FOLLOW US
f t

Free Principles eTextbooks

Hundreds of pages of full-colour images with descriptive text and calculations. Extensive Tables of Contents with Next and Previous page navigation.



• **Electronics**



• **Computing**



• **Mathematics**



• **Mechanics**



• **Accounting**

• **www.eptsoft.com**



Build your new 5" gauge coal fired 'POLLY Loco' and be ready to enjoy running in the new season.

Supplied fully machined, assembly requires hand tools only – no riveting, soldering or other complex processes. Kit includes boiler CE/UK CA certified and accepted under Australian AMBSC regulations.

Model can be supplied as full kit (unpainted) or a succession of kit modules.



10 other models, tank engines, tender engines, standard gauge/narrow gauge – something for everyone!
Prices from £5716 including VAT and carriage.
Build & cost optionally spread over 12 months.

Buy with confidence from an established British Manufacturer

144 page Catalogue £2.50 UK £8 international posted (or download free!) and enquire for further details or visit our website where you will find other Polly Locos, Kits, drawings and castings for scale models and comprehensive ME Supplies.



Polly Model Engineering Limited
Atlas Mills, Birchwood Avenue,
Long Eaton, Nottingham,
NG10 3ND, United Kingdom

www.pollymodelengineering.co.uk

Tel: +44 115 9736700

email: sales@pollymodelengineering.co.uk

HOME AND WORKSHOP MACHINERY

144 Maidstone Road, Fooks Cray, Sidcup, Kent, DA14 5HS
 tel: 0208 300 9070 - evenings 01959 532199
 website: www.homeandworkshop.co.uk
 email: sales@homeandworkshop.co.uk
 visit our eBay store! click link on home page;
homeandworkshopmachinery



RotoCamm MDX-40A CNC
Routers £2000 each



Archer No.2 1/2" reversible
tapping head £120



Meddings 6" power hacksaw £300



Drummond lathe £325



Ajax UP Universal
Mill £1750



Boxford AUD MK11 lathe,
gearbox, PCF £1825



Meddings Dirltru pedestal drills
1/2" & 1MT models £295 each



Neat cut and soluble
cutting oils
£10 each



Large Vee Blocks 12" bar
£425



Check out our eBay store to
view our large amount of stock!



Stanier precision vice 55mm
jaw New / New Zealand £195



Myford Super 7, ML7R, ML7
MI10 Speed 10 Change
wheels Genuine £10 - £37



Viceroy buffer £345



Emco Compact 5 £1500



Warco 3F 3MT £750



Bridgeport milling machine
42" x 9" (metric) £3750



Myford lathe rare
Conrod jig £245



MYFORD SUPER 7B PCF £3250



Harrison Graduate wood lathe
240V £1375



Boxford AUD gearbox + power cross feed,
4 way tool post + light £1300



DR / MOD gear cutters
£20 each,
please enquire for availability.



Denbigh No.6 Fly press £345



Smart and Brown Model L
second operation lathe £750



Quorn tool and cutter grinder
£1000



MYFORD SUPER 7B 3 1/2" x 31",
gearbox, clutch, power cross feed
£3750



Goliath 5R 8" guillotine £80



Union G14 14" pedestal grinder
£750



Fobco 7 EIGHT 7/8" capacity
pedestal drilling machine £1000



MYFORD SUPER 7B 3 1/2" x 31",
gearbox, clutch, power cross feed
£3250



Tripos 240V
switch £90
Myford rifle / bridge
felts 5 for just £20



Edgwick centre lathe 7 1/2" x 44"
240 volts £1400



Colchester Mascot VS2000
fixed steady £575



Keetona Box-Form 100"
14g box and pan folder
£2950

Please phone 0208 300 9070 to check availability.
 Distance no problem – Definitely worth a visit – prices exclusive of VAT
 Just a small selection of our current stock photographed!

Worldwide
Shipping

